



**CONTRACTOR  
LIGHTING & SUPPLY**

WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

# LOW PROFILE ALL LED EXIT & EMERGENCY COMBO



## ELECTRICAL

- Dual voltage 120/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery).
- 3.6V long-life, maintenance-free, rechargeable Ni-Cad battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.


## ILLUMINATION

- Adjustable long lasting, efficient ultra-bright white LED lamp heads.
- One, 0.5 watt white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED exit sign illumination.

## OPTIONS

- SPV: UL Listed for special voltage option.

## DIMENSIONS

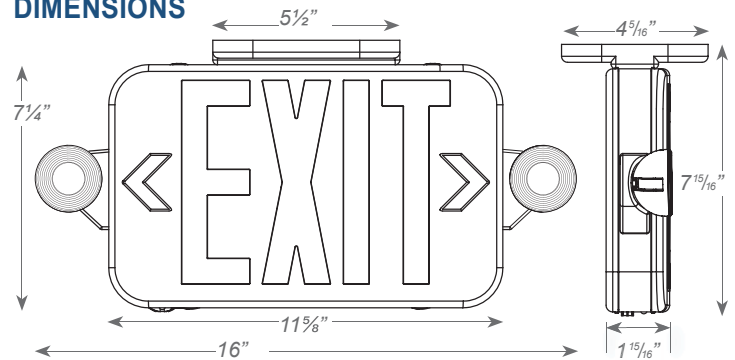

## MOUNTING

- EZ-snap thermoplastic mounting canopy included - provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

## WARRANTY/LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0° - 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

## ORDERING INFORMATION

MODEL	FACE	LETTER COLOR	HOUSING COLOR	OPTIONS
02-C2LPRW-B	3 Universal Single/ Double	R Red G Green	W - White B - Black	RC Remote Capacity SPV 120/230 Volt 50/60Hz



PROJECT
TYPE
CATALOG #

# LOW PROFILE ALL LED EXIT & EMERGENCY COMBO

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RED	1.1	1.2	1.3	0.08	0.09	0.09
CEU RED RC	1.6	1.6	1.6	0.12	0.11	0.11
CEU GREEN	1.1	1.2	1.3	0.08	0.09	0.09
CEU GREEN RC	1.6	1.6	1.6	0.12	0.11	0.11

## REMOTE LAMP COMPATIBILITY

Reference remote lamp head specification sheets for complete catalog number ordering information.

	MAXIMUM WATTAGE ALLOWED
CEU	1

REMOTE HEAD FAMILY	TOTAL WATTAGE
RHLED-1-3.6	1.0
RHLED-1-WP-3.6	1.0
RHLED-1-KX-3.6	1.0