



**CONTRACTOR
LIGHTING & SUPPLY**

WWW.CONTRACTORLIGHTING.COM


PROJECT
TYPE
CATALOG #

EXIT AND EMERGENCY COMBO LED LIGHTPIPE



*Innovative Compact
Lightpipe Design*

DIMENSIONS

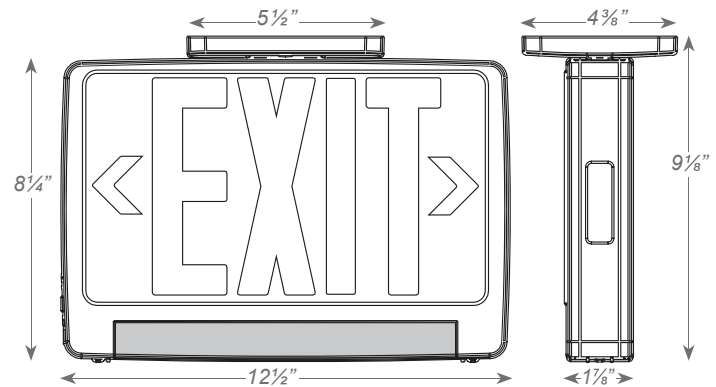

ELECTRICAL

- Dual 120/277 voltage.
- Remote capable standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Light Pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ILLUMINATION

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Light Pipe" lens for optimal light distribution.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL Listed for damp locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

OPTIONS

- SDT: Elf-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety code.
- Custom: Signs available with requested "special" wording.

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
02-CLP	1 Single Face 2 Universal Single / Double	R Red G Green	W - White B - Black	SDT - Self-diagnostics CUSTOM - Custom Wording