


PROJECT
TYPE
CATALOG #

04-RHRWLED1-PWP-MV OUTDOOR LED REMOTE HEAD



Also available in Thermoplastic

DIMENSIONS

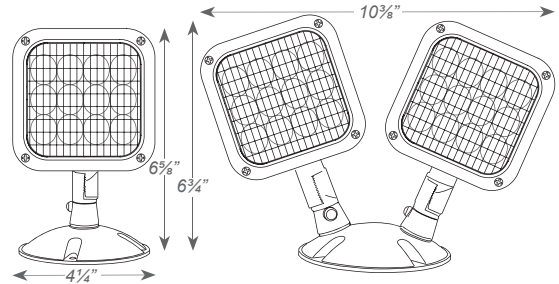

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads
- High performance chrome-plated metallized reflector and glass lens with 8 or 12 LED's in each lamp head for optimal light distribution
- Adjustable LED lamp heads increases center-to-center spacing

WARRANTY/LISTING

- 5-year warranty
- UL Listed
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided)

HOUSING

- Available in both engineering grade, high-impact resistant thermoplastic or premium grade die-cast aluminum housing
- Sealed and gasketed in standard gray or optional black finish

MOUNTING

- Universal mounting base mounts to single-gang switch box
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run
- Suitable for wall or ceiling mount

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	3.6V	9.6V	MV
02-C2__-LED		x	x
02-CLP2__-RC		x	x
02-EA__-RC	x		x
02-EWL-LED	x		x
02-ECO-LED-EM-RC		x	x
02-C2LP__-RC	x		x
02 -CEU-RC	x		x

ORDERING INFORMATION

MODEL	NO. OF HEADS	OPTIONS	HOUSING	VOLTAGE	COLOR	LAMP TYPE ¹
04-RHRWLED1-PWP-MV	1 Single Head	Blank For Standard non-self diagnostic fixtures	PWP Thermoplastic	3.6V For use with 3.6V batteries	Blank Gray	Blank 8 LEDs 1W
04-RHRWLED2-PWP-MV	2 Double Head	SDT For Standard non-self diagnostic fixtures	WP Die-cast	9.6V For use with 9.6V batteries For use with 3.6V, 6V, 9.6V & 12V batteries	B Black	HL 12 LEDs 1.5W

1. Wattage rating stated per head.