



**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM


02-ETD-ACEM-HL

DECORATIVE OUTDOOR LED AC /
EMERGENCY LIGHT



PROJECT
TYPE
CATALOG #

DIMENSIONS

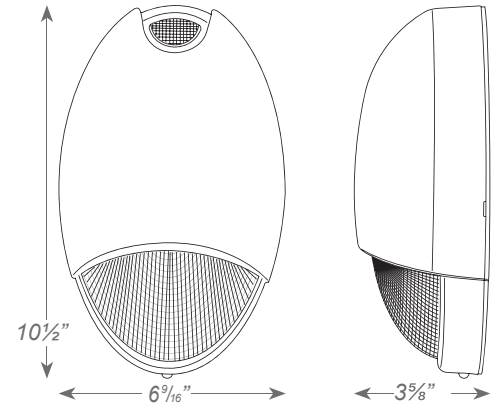

ELECTRICAL

- Universal 120-277VAC voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety code.
- Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism.
- PC: Unit features standard photocell technology that automatically responds to low exterior lighting levels in "AC" mode.

HOUSING

- Decorative, low-profile architectural design.
- Die-cast aluminum housing.
- Durable powder-coated finishes in white, black and dark bronze.
- Dealed and gasketed.

OPTIONS

- CW: Cold-weather unit for use in freezer applications (in temperatures as low as -20°C - 50°C)

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for wet locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ILLUMINATION

- Long-life, efficient ultra-bright white LED.
- 12 watt per unit.
- Output of 1286 lumens in AC mode and 350 lumens in DC mode.
- Mirror-bright reflector and prismatic polycarbonate refractor.
- Can be used as a NORMALLY-ON or NORMALLY-OFF light as well as on a switched circuit.

MOUNTING

- Surface mount via easy connect back plate that fits most standard size junction boxes.
- Universal K/O pattern on back plate for wall mount.

ORDERING INFORMATION

MODEL	HOUSING COLOR	STANDARD FEATURES	OPTION
02-ETD-ACEM-HL-(housing color)-SDT-PC	W WHITE BR DARK BRONZE B BLACK N NICKEL	SDT Self-Diagnostics (standard) PC Photocell Sensor	CW Cold Weather CEC California Title 24 Compliant