




|           |
|-----------|
| PROJECT   |
|           |
| TYPE      |
|           |
| CATALOG # |
|           |

# DECORATIVE OUTDOOR LED AC / EMERGENCY LIGHT



## DIMENSIONS

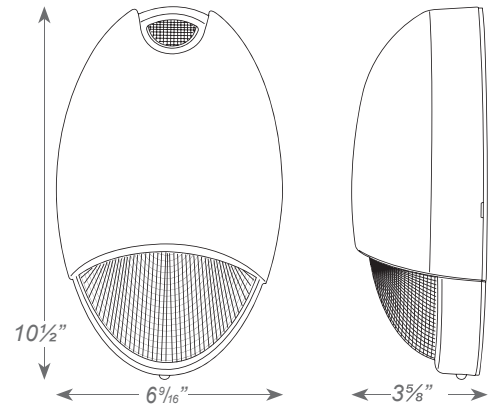

### ELECTRICAL

- Universal 120-277VAC voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety code.
- Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism.

### HOUSING

- Decorative, low-profile architectural design.
- Die-cast aluminum housing.
- Durable powder-coated finishes in white, black and dark bronze.
- Dealed and gasketed.

### OPTIONS

- CW: Cold-weather unit for use in freezer applications (in temperatures as low as -20°C - 50°C)
- PC: Unit features optional photocell technology that automatically responds to low exterior lighting levels in "AC" mode.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for wet locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### ILLUMINATION

- Long-life, efficient ultra-bright white LED.
- 6 watt (2 LEDs x 3.0 watt) per unit.
- Mirror-bright reflector and prismatic polycarbonate refractor.
- Can be used as a NORMALLY-ON or NORMALLY-OFF light as well as on a switched circuit.

### MOUNTING

- Surface mount via easy connect back plate that fits most standard size junction boxes.
- Universal K/O pattern on back plate for wall mount.

## ORDERING INFORMATION

| MODEL             | HOUSING COLOR             |                                 | COLOR OPTION                           |
|-------------------|---------------------------|---------------------------------|--|
| 02-ETD-ACEM-W-SDT | W WHITE<br>BR DARK BRONZE | SDT Self-Diagnostics (standard) | CW Cold Weather<br>PC Photocell Sensor |