




PROJECT
TYPE
CATALOG #

6" SLOPED CEILING IC AIR TIGHT RECESSED DOWNLIGHTING



06-6C-SLPN-ICAT

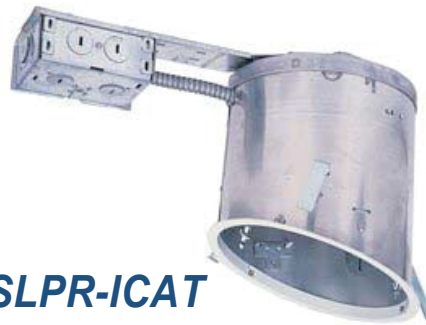

06-6C-SLPR-ICAT



FEATURES

For new work uses, this 6 IC sloped incandescent recessed housing accommodates up to 75W R30/R40 or PAR 30 lamps with proper trim. Thermal protector safeguards against overheating, and housing is UL listed.

06-6C-SLPN-ICAT

- Safe, thermally protected, for damp locations
- Easy access housing
- Adjustable socket for flexibility in lamping options
- Time saving junction box design
- Easy installation
- Used for pitched ceilings 10-30 degrees
- UL damp location
- 7 x 7H

For Remodel uses, this 6 IC sloped incandescent recessed housing accommodates up to 75W R30/R40 or PAR 30 lamps with proper trim. Thermal protector safeguards against overheating, and housing is UL listed.

06-6C-SLPR-ICAT


- 6½"W x 7½"H
- For old work or remodel applications
- For direct contact with insulation
- Up to 75-watt lamp with proper trim
- UL Listed for both drywall and drop ceilings
- Thermally-protected
- Adjustable lamp height
- UL Listed for feed-through wiring and damp location

OPTIONS

When ordering specify suffix:

- “AT” for air-tight housing
- “Q” for quick connector
- “N” for Nail Hanger Bars

TRIMS



Black Stepped Baffle
75W/R30 or R40



White Stepped Baffle
75W/R30 or PAR 30

Also available in Gimbal rings.