



**CONTRACTOR
LIGHTING & SUPPLY**


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

LED EMERGENCY UNIT ADJUSTABLE OPTICS



DIMENSIONS

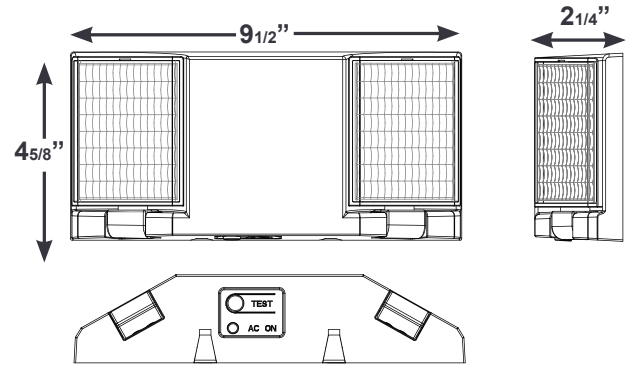

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ILLUMINATION

- Long-life, efficient ultra-bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125 watt) per head.
- High-performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Two fixed or adjustable LED lamp heads provide optimal center-to-center spacing.

MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Suitable for wall or ceiling mount.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL Listed for damp locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

ORDERING INFORMATION

MODEL	HOUSING COLOR
02-ELW-LED	Blank - White B - Black