

PROJECT
TYPE
CATALOG #

02-CWL-LED WET LOCATION ALL LED EXIT & EMERGENCY COMBO

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads
- 3.6W (3 LEDs x 1.2 watt) per head
- Adjustable LED lamp heads provide optimal center-to-center spacing
- Long-life, energy efficient Red or Green LED EXIT sign illumination

ELECTRICAL

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 6V long life, maintenance free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamphoods for minimum 90-minute emergency illumination
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Remote capacity available as an option


WARRANTY & LISTING

- Five year warranty on all electronics and housing
Battery pro-rated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for wet locations (0°C – 50°C)
- Certified to CEC under Title 20 Regulations

HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish
- High-impact resistant, UV stabilized polycarbonate clear lens
- Corrosion resistant enclosure with engineering grade silicone gasket
- K/O's provided for conduit feed applications
- EZ snap-out Chevron directional indicators

DIMENSIONS

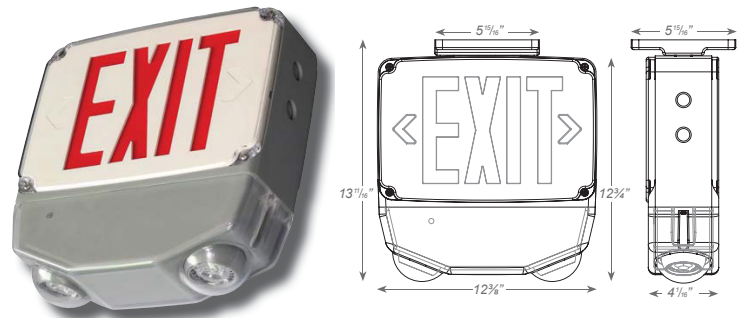

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C)
- Custom: Signs available with requested "special" wording

MOUNTING OPTION

- Die-cast aluminum mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

ORDERING INFORMATION

MODEL	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
02-CWL-LED	1 = Single Face 2 = Double Face	R = Red G = Green	W = White B = Black G = Gray (with white faceplate)	TP = Tamper Proof Screws CUSTOM = Custom Wording CW = Cold Weather RC = Remote Capacity SDT = Self Diagnostics



PROJECT
TYPE
CATALOG #

U2-CWL-LED

WET LOCATION ALL LED EXIT & EMERGENCY COMBO

REMOTE LAMP CAPABILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY														
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED		
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V			
02-CWL-LED	6V	7.2W			X	X	X		X		X		X		X		X

CENTER-TO-CENTER SPACING GUIDELINES

1	0.30	0.43	0.59	0.76	0.98	1.22	1.37	1.37	1.21	0.97	0.74	0.70	0.75	0.92	1.09	1.13	1.04	0.89	0.68	0.50	0.34	0.24	0.20	0.14	
2	0.36	0.50	0.77	1.02	1.26	1.51	1.69	1.60	1.43	1.15	0.89	0.83	0.93	1.20	1.51	1.67	1.57	1.33	1.03	0.71	0.52	0.35	0.24	0.18	
3	0.43	0.60	0.82	1.20	1.51	1.77	1.90	1.84	1.53	1.20	0.95	0.89	1.03	1.44	1.78	1.93	1.84	1.50	1.15	0.78	0.55	0.38	0.27	0.20	
4	0.42	0.60	0.85	1.13	1.44	1.70	1.82	1.70	1.38	1.12	0.89	0.87	1.05	1.50	1.83	2.09	2.00	1.68	1.26	0.94	0.66	0.40	0.31	0.23	
5	0.44	0.61	0.80	1.06	1.29	1.45	1.50	1.40	1.12	0.96	0.78	0.78	0.97	1.34	1.70	1.93	1.87	1.61	1.25	0.91	0.67	0.48	0.32	0.23	
6	0.37	0.54	0.69	0.86	1.05	1.10	1.12	1.04	0.87	0.70	0.62	0.64	0.80	1.06	1.34	1.58	1.55	1.37	1.12	0.90	0.68	0.50	0.34	0.24	
	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12

Meets NFPA 101 Requirements for: 24'+ center-to-center spacing - 6'+ path of egress 0' from wall - 9' mounting height.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
02-CWL-LED-R	4.9	4.9	0.048	0.021
02-CWL-LED-R-CW	33.3	146.9	0.286	0.535
02-CWL-LED-R-RC	6.6	6.5	0.062	0.026
02-CWL-LED-R-CW-RC	35	148.5	0.300	0.540
02-CWL-LED-R-SDT	5.2	5.2	0.050	0.022
02-CWL-LED-R-CW-SDT	33.6	147.2	0.288	0.536
02-CWL-LED-R-RC-SDT	6.9	6.8	0.064	0.027
02-CWL-LED-R-CW-RC-SDT	35.3	148.8	0.302	0.541
02-CWL-LED-G	4.9	4.8	0.048	0.020
02-CWL-LED-G-CW	33.3	146.8	0.286	0.534
02-CWL-LED-G-RC	6.5	6.5	0.061	0.026
02-CWL-LED-G-CW-RC	34.9	148.5	0.299	0.540
02-CWL-LED-G-SDT	5.2	5.1	0.050	0.021
02-CWL-LED-G-CW-SDT	33.6	147.1	0.288	0.535
02-CWL-LED-G-RC-SDT	6.8	6.8	0.063	0.027
02-CWL-LED-G-CW-RC-SDT	35.2	148.8	0.301	0.541