

PROJECT
TYPE
CATALOG #

06-6CT-LEDNIC-EM

ADJUSTABLE RECESSED EMERGENCY DOWN-LIGHT

APPLICATIONS

Adjustable ultra bright 8W bi-pin halogen or 1.5W LED lamp head. Sealed beam PAR36-type gimbal trim with smooth chrome-plated metallized reflector and plastic lens offers optimal light distribution.

FEATURES

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp head for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

WARRANTY & LISTINGS


- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for dry locations
- 5-Year Warranty on all electronics and housing

MOUNTING


- Compatible with drop ceiling mount installations. Bar hangers included

HOUSING

- Steel mounting frame and housing
- 6" recessed housing with mounting bar hangers
- Impact-resistant thermoplastic adjustable gimbal trim
- Junction box with 3/4" knockouts for AC input
- Trim securely attached to housing with spring clips

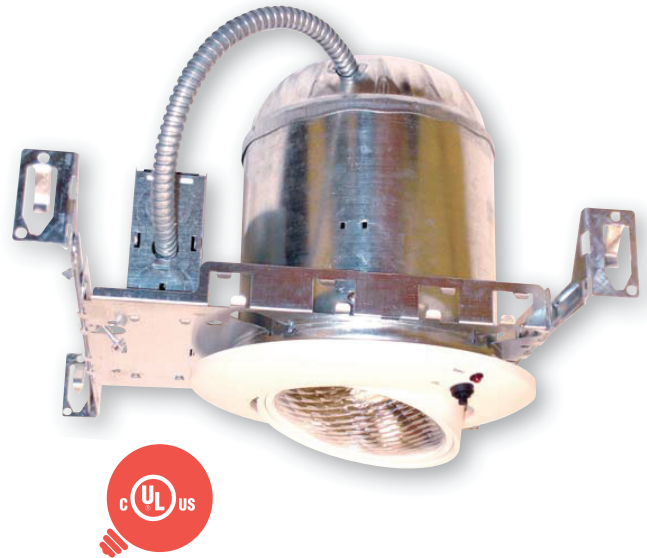

DIMENSIONS

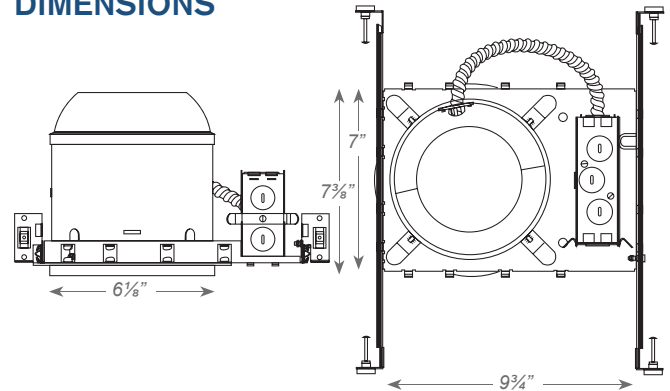

PRODUCT PARAMETER

MODEL	HOUSING COLOR	INPUT WATTS (W)		INPUT AMPS (A)	
		120V	277V	120V	277V
06-6CT-LEDNIC-EM	W=White BLK= Black	8.0	8.0	0.05	0.05