



**CONTRACTOR  
LIGHTING & SUPPLY**

WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

# CHICAGO APPROVED LED EDGE LIT EXIT SIGN



Wall Mount option is shown in image below.



## ELECTRICAL

- Dual 120/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations

## MOUNTING

- Compatible with drywall or drop-thru ceiling mount installations.
- Wall mount capability optional.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL Listed for damp locations (0° - 50°C/32°F - 122°F standard).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

## OPTIONS

- WM: Wall mount.

## HOUSING

- Premium-grade, extruded aluminum housing.
- Trim assembly is easily detachable, providing accessibility for service or maintenance.

## ORDERING INFORMATION

MODEL	NO. of FACES	LETTER	HOUSING	BATTERY	OPTIONS	SIGNAGE/DIRECTIONAL ARROWS
02-CH-XER	1 Single Face 2 Double Face	RW Red on White	A Aluminum Blank W White EM	AC only Ni-Cd battery	WM Wall Mount <sup>1</sup>	NA Exit No Arrow SWNA Stairs No Arrow DA Exit Double Arrow SWDA Stairs Double Arrow RA <sup>1</sup> Exit Right Arrow SWRA <sup>1</sup> Stairs Right Arrow LA <sup>1</sup> Exit Left Arrow SWLA <sup>1</sup> Stairs Left Arrow LARA <sup>2</sup> Exit Left/Right Arrow SWLARA <sup>2</sup> Stairs Left/Right Arrow



**CONTRACTOR  
LIGHTING & SUPPLY**

WWW.CONTRACTORLIGHTING.COM


PROJECT
TYPE
CATALOG #

# CHICAGO APPROVED LED EDGE LIT EXIT SIGN


## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
AC Model	4.3	4.7	0.040A	0.02A
EM Model	4.5	4.9	0.042A	0.02A

## WALL MOUNT DIMENSIONS

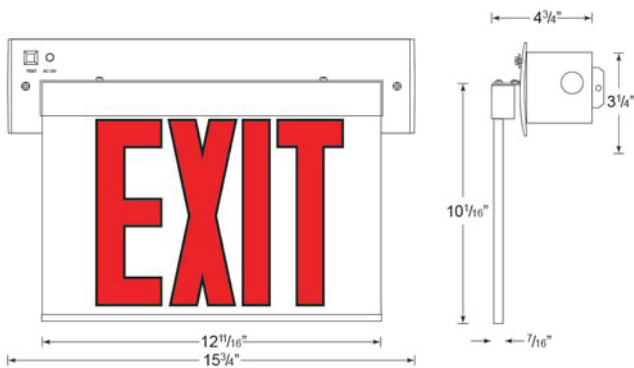

## DIMENSIONS

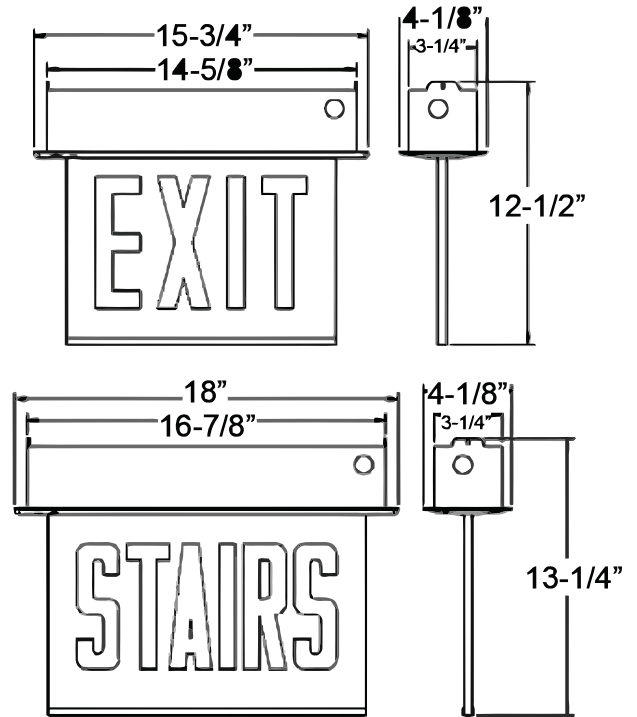

## ARROW CONFIGURATION

