



**CONTRACTOR  
LIGHTING & SUPPLY**


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

# RECESSED ALUMINUM LED EDGELIT EXIT NEW YORK APPROVED



## DIMENSIONS

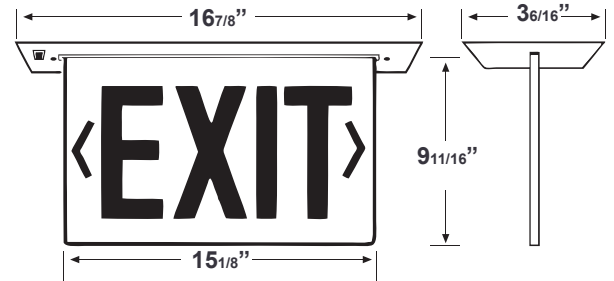

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for damp locations (0°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded Aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance, also available in black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.

## OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannual, and annual test to ensure reliable operation and meet electrical and life safety codes.

## ILLUMINATION

- Ultra-bright, energy efficient, long-life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City approved 8" EXIT letters.

## ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS
02-NYX-RED	1 Single Face 2 Double Face	R Red	C Clear* M Mirror W White	W White B Black A Aluminum	Blank AC Only EM Battery Backup	SDT Self-Diagnostics

\*With single face only.