



**CONTRACTOR
LIGHTING & SUPPLY**


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

NEW YORK CITY APPROVED STEEL LED EXIT SIGN



DIMENSIONS

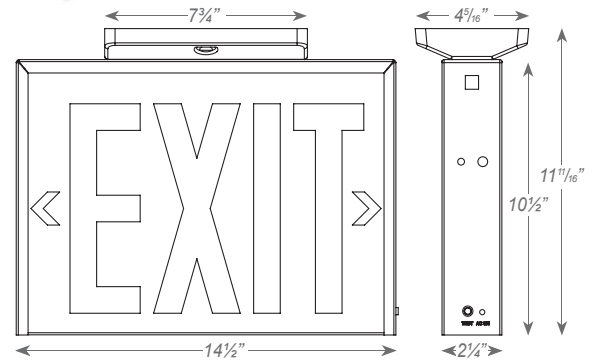

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ILLUMINATION

- Ultra-bright, energy efficient, long-life Red LED.
- NY compliant 8" Exit letters.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field removable steel knockout Chevron directional indicators.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Top and side K/O provided for conduit feed applications.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
02-NYX	1 Single Face 2 Double Face 3 Universal Single/ Double Face	R Red	W WHITE B BLACK	Blank AC Only EM Battery Backup