



CONTRACTOR LIGHTING & SUPPLY


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

LED EDGELIT EXIT LIGHT



DIMENSIONS

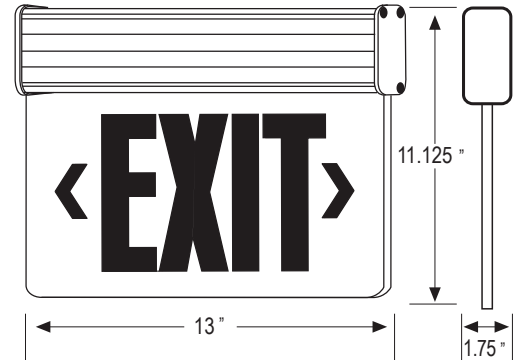

FEATURES

- Energy efficient LED technology.
- Decals & template provided for chevron directional indicators.
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Maintenance-free, rechargeable NiCd battery (EM Model).
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ILLUMINATION

- Ultra-bright, energy efficient, long-lasting Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provided consistent, uniform illumination.

OPTIONS

- SDT: Self-diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes.
- DC: Dual Circuit option on the AC-only unit enables it to be connected to two different (primary and secondary, one acting as a back-up for the other) supplies at the same time (consult factory for more information on this)
- Edgelit EXIT panels available to order separately (contact customer service)
- Double face utilizes a silver or white mylar insert.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder coated).

MOUNTING

- Die-cast aluminum mounting canopy included-provides top, end or back mount convenience.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS	PANEL COLOR
02-XEU	1 - Single Face 2 - Double Face	R - Red G - Green	W - White B - Black A - Anodized Aluminum	Blank - AC Only EM - NiCad Battery	SDT - Self-Diagnostics 2C - Dual Circuit SW - Special Wording	C - Clear M - Mirror (Silver Mylar) W - White (White Mylar)