



**CONTRACTOR
LIGHTING & SUPPLY**


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

COMPACT LED EXIT SIGN WET LOCATION



DIMENSIONS

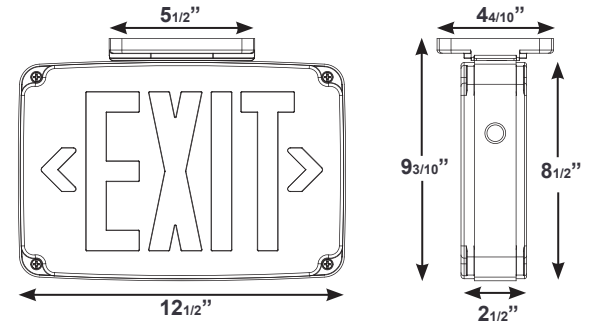

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for wet locations. (-20°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

HOUSING

- 5VA Flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY		OPTIONS
02-XPW	1 Single Face 2 Double Face	R Red G Green	W WHITE B BLACK G GREY	Blank AC Only EM Battery Backup	CW Cold Weather (STANDARD)	SDT Self-Diagnostics TP Tamper-Proof 2C Dual-Circuit

*Special voltage options available.