



**CONTRACTOR
LIGHTING & SUPPLY**


WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

STEEL LED EXIT SIGNS



DIMENSIONS

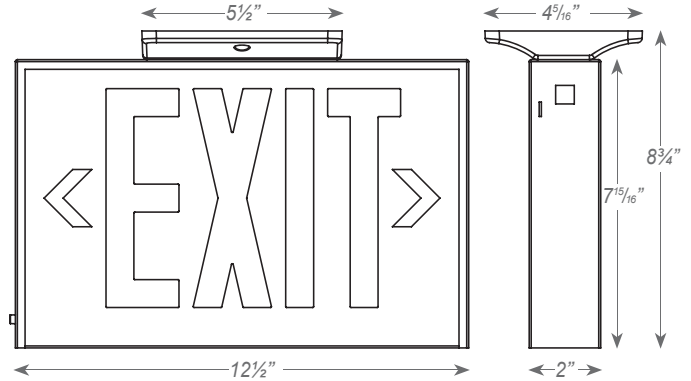

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for damp locations. (0°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout chevron directional indicators.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
02-XS	1 Single Face 2 Universal Single/ Double Face	R Red G Green	W WHITE B BLACK	Blank AC Only EM Battery Backup	SDT Self-Diagnostics ¹

¹ Available only with EM units.