

PROJECT
TYPE
CATALOG #

20-DL-KFS

9" DISC – FIELD

SELECTABLE LED COLORS

FEATURES

- Field-selectable 2700k, 3000k, 3500k, 4000k & 5000k color temperatures*
- Long-life LEDs provide at least 70% of initial lumen output (L₇₀) for 50,000 hours of operation**
- Provides 1,100 nominal lumens
- 18.5 nominal watts
- Color rendering index (Ra) > 90
- 120 AC voltage is standard
- Power factor > 0.90
- Dimmable with most line voltage (triac) dimmers
- Die-cast aluminum housing. Multi-layer diffuser includes layers of glass and polycarbonate
- Surface-mounted luminaire can be installed on a variety of junction boxes

* Contact factory for other color temperatures and lumen packages
** L₇₀ hours are IES TM-21-11 calculated hours.



Shown with brushed nickel finish




WARRANTY & LISTINGS

- cETLus listed for wet locations in ambient temperatures of -20°C to 40°C (-4°F to 104°F)
- Energy Star qualified
- Complies with FCC Part 15, class B
- Title 24 compliant
- 5-Year Warranty of all electronics and housing

* Contact factory for other color temperatures and lumen packages.
** L₇₀ hours are IES TM-21-11 calculated hours.

DIMENSIONS

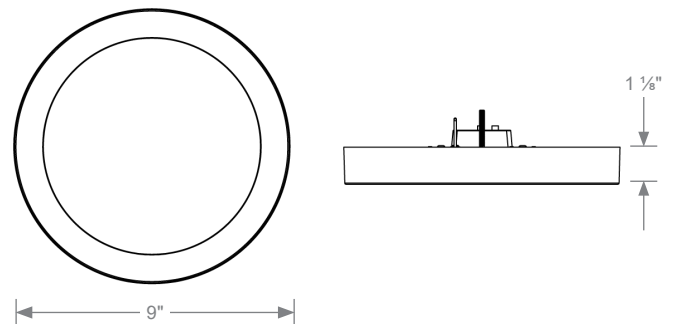

Weight: 1.8 pounds

PRODUCT PARAMETER

MODEL	NOMINAL LUMEN OUTPUT	COLOR TEMPERATURE	HOUSING COLOR
20-DL	11 L = 1,100 lm	KFS*	
		2700K	WH White
		3000K	N Brushed Nickel
		3500K	BZ Bronze
		4000K	
		5000K	

* Field Selectable