

PROJECT
TYPE
CATALOG #

20-DR-KFS

DOUBLE-RING, SURFACE-MOUNTED LUMINAIRE FIELD SELECTABLE LED COLORS

FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 93,000 hours of operation**
- Color rendering index (Ra) > 90
- 20-DR10 provides 1,000 nominal lumens from 15 nominal watts
- 20-DR14 provides 1,800 nominal lumens from 20 nominal watts
- 20-DR18 provides 2,000 nominal lumens from 20 nominal watts
- Input voltage = 120V 60Hz
- Power factor > 0.90
- Triac dimming
- Steel housing, brushed nickel finish
- Plastic lens
- Easy installation in new construction or remodel applications
- This device is not intended for use with emergency exits

WARRANTY & LISTINGS

- cETLus listed for damp locations in ambient temperatures of 15°C to 40°C (5°F to 104°F)
- Energy Star qualified
- Title 24 qualified
- Complies with FCC Part 15, class B
- Input transient protection = 1kV
- 5-Year Warranty of all electronics and housing

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.



COMPATIBLE DIMMERS

MANUFACTURER/SERIES	MODEL NUMBER
LUTRON DIVA	DVCL-153PR-WH
LUTRON DIVA	CTCL-153PDH-WH
LUTRON DIVA	TGCL-153PH-WH
LUTRON DIVA	MACL-153MH-WH
LUTRON DIVA	P-PKG1W-WH-R
LEVITON	R62-06674-P0W
LEVITON	R12-06672-1LW
LEVITON	R50-IPL06-10M
EATON	SAL06P-LA-K

DIMENSIONS

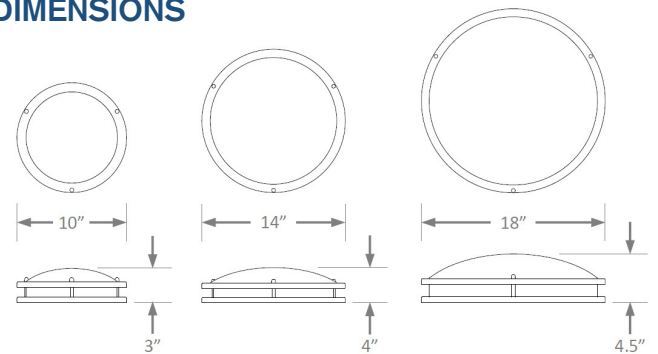

Weights:

20-DR10 = 1.4lbs.

20-DR14 = 2.2lbs.

20-DR18 = 3.3lbs.

PRODUCT PARAMETER

MODEL	NOMINAL LUMEN OUTPUT		COLOR TEMPERATURE
20-DR10	10L	1,000 lm	2700K
20-DR14	18L	1,800 lm	3000K
20-DR18	21L	2,000 lm	3500K
			4000K
			5000K

* Field Selectable