

PROJECT
TYPE
CATALOG #

20-HBLE LED LINEAR HIGH BAY, 78,000 LUMENS

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 130,000 hours of operation with at least 70% of initial lumen output (L_{70}), and 40,000 hours with at least 90% of initial lumen output (L_{90}).**
- 78,000 nominal lumens.
- 500 nominal watts.
- LED chromaticity based on ≤ 7 -step ANSI quadrangles.
- LED color maintenance ≤ 0.002 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming drivers are standard.
- Power factor > 0.90 .
- Total harmonic distortion $< 20\%$.
- Color rendering index > 80 .
- Painted steel housing and PMMA (polymethyl methacrylate) frosted lenses are standard.
- Chain-mount kits (includes v-hooks and $\frac{1}{8}$ " thick, 1-meter long chain) are standard.
- Optional wire-guards.
- Easy installation in new construction or retrofit.




* Contact factory for other color temperatures and lumen packages.
** L_{70} & L_{90} are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS

- cULus listed for damp locations in ambient temperatures from -20°C to 50°C (-4°F to 122°F).*
- Complies with FCC Part 15, class A
- Complies with IEEE C.62.41-1991, input transient protection (2.0kV).
- 5-Year warranty of all electronics and housing

*Luminaires utilizing step-down transformers must be mounted at least 18" inches below ceiling in ambient temperatures not exceeding 42°C . Surface mounted luminaires must not be installed in ambient temperatures exceeding 44°C . 50°C only when mounted 18" below ceiling with no step-down or emergency drivers installed.

DIMENSIONS

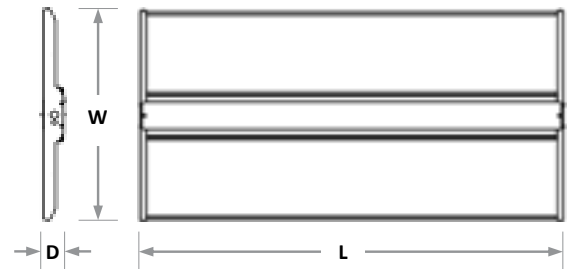

Model	Length (L)	Width (W)	Depth (D)	Weight
78L	46.5"	22.9"	2.2"	21 lbs.

MOUNTING OPTIONS

- Chain mounting with V-hooks is standard.
- Optional mounting means include surface mounting and cable mounting. *

* See accessories, page 2.

¹ Emergency drivers available for 120-277V models only.

² See list of emergency drivers (page 2).

³ EC emergency drivers are California Energy Commission (CEC) listed.

PRODUCT PARAMETER

SERIES	NOMINAL LUMENS	COLOR TEMPERATURE	INPUT VOLTAGE	OCCUPANCY SENSOR	EMERGENCY DRIVER ^{1,2,3}
20-HBLE	78L = 78,000	4K = 4000K	UNC 347-480V	ODS Passive infrared	EM16 1,600 lumens EM20 2,000 lumens EM24 2,400 lumens
		5K = 5000K	Blank 120-277V	Blank No occupancy sensor	EC16 1,600 lumens EC20 2,000 lumens EC24 2,400 lumens Blank No emergency driver



PROJECT
TYPE
CATALOG #

20-HBLE LED LINEAR HIGH BAY, 78,000 LUMENS

COMPATIBLE EMERGENCY DRIVERS

Emergency Driver Part Number	EM16 / EC16		EM20 / EC20		EM24 / EC24		Runtime
Model	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	
20-HBLE-78L-xK	10.7	1740	13.7	2220	17.0	2760	90 MINS.

COMPATIBLE DIMMERS

Manufacture	Model Number	Dimming Range	Load Switching Capacity
Leviton	IP710-LFZ	10%-100%	1200W
General Protecht	DMD-LED3-102	10%-100%	600W

ACCESSORIES

Mounting Options

- HBLE-SMK-4.4WIDE = Surface-mounting kit
- LEDFHB-CMK3 = Cable-mounting kit, 3 meters long
- LEDFHB-CMK5 = Cable-mounting kit, 5 meters long

Wire Guard

- HBLE-WG-47X23 = Wire-guard

PROJECT
TYPE
CATALOG #

20-HBLE LED LINEAR HIGH BAY, 78,000 LUMENS

ELECTRICAL DATA

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens/Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
20-HBLE-78L-4K	4000k	>80	77,545	523	148	120-277	4.36	2.18	1.89	>0.90	<20%	130,000
20-HBLE-78L-5K	5000k	>80	77,601	511	152	120-277	4.26	2.13	1.84	>0.90	<20%	130,000

¹ Color rendering index.

² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

20-HBLE-78L-4K

Luminaire Data

Description	Linear High Bay 78L, 4K
Total Lumens	77,545
Input Wattage	523
Efficacy (lm/W)	148
Spacing Criterion (0-180°)	1.26
Spacing Criterion (90-270°)	1.26

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	10,986	14.2%
0-30°	23,282	30.0%
0-40°	37,847	48.8%
20-50°	41,313	53.3%
40-70°	34,722	44.8%
0-60°	64,352	83.0%
0-80°	76,648	98.8%
0-90°	77,503	99.9%
90-180°	42	0.1%
0-180°	77,545	100.0%

