

# 06-4HVCT10HRWH

## 4" MODULE - KFS

PROJECT
TYPE
CATALOG #


### FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 119,000 hours of operation\*
- Color rendering index ( $R_a$ ) > 90
- 700 nominal lumens
- 10 nominal watts
- 120 AC voltage (60Hz) is standard
- Power factor > 0.90
- Triac dimming
- Aluminum housing
- Easy installation in new construction or retrofit applications
- Type IC
- This device is not intended for use with emergency exits

\* $L_{70}$  hours are IES TM-21-11 calculated hours



### DIMENSIONS

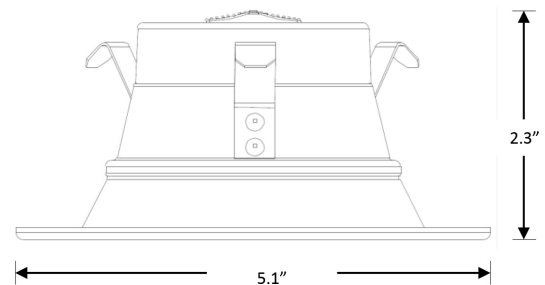

Weight: 0.19 lbs.

### WARRANTY & LISTINGS

- cETLus listed for damp locations
- Energy Star certified
- Compatible for new construction and retrofit applications
- Complies with FCC Part 15, class B
- Complies with EN61000-4-5 surge protection (0.5kV)
- 5-year warranty of all electronics and housing.

### PRODUCT PARAMETER

MODEL	COLOR TEMPERATURE	
06-4HVCT10HRWH	SELECTABLE CCT	2700K
		3000K
		3500K
		4000K
		5000K