

06-6HVCT15HRWH

6" MODULE - KFS

FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 119,000 hours of operation*
- Color rendering index (R_a) > 90
- 1,000 nominal lumens
- 14 nominal watts
- 120 AC voltage (60Hz) is standard
- Power factor > 0.90
- Triac dimming
- Aluminum housing
- Easy installation in new construction or retrofit applications
- Type IC
- This device is not intended for use with emergency exits

* L_{70} hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS

- cETLus listed for damp locations
- Energy Star certified
- Compatible for new construction and retrofit applications
- Complies with FCC Part 15, class B
- Complies with EN61000-4-5 surge protection (0.5kV)
- 5-year warranty of all electronics and housing


PRODUCT PARAMETER

MODEL	COLOR TEMPERATURE	
06-6HVCT15HRWH	SELECTABLE CCT	2700K
		3000K
		3500K
		4000K
		5000K

PROJECT
TYPE
CATALOG #



DIMENSIONS

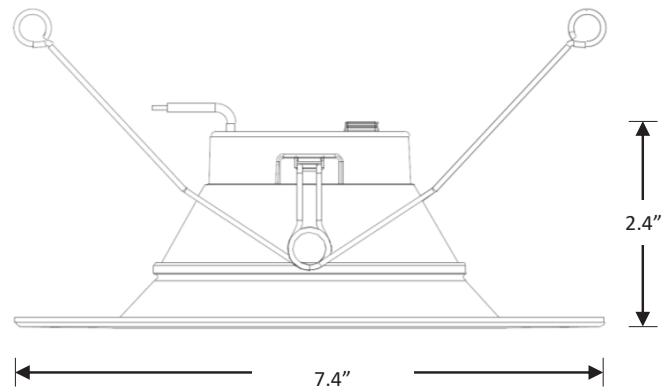

Weight: 0.33 lbs.