

06-DK SERIES

DISK LIGHT KELVIN FIELD SELECTABLE

HOUSING

- Premium powder-coat, steel , white housing.

ELECTRICAL

- 120V AC voltage (60Hz) is standard.
- Triac dimming.
- Input transient surge protection = 0.5kV.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

OPTICAL SYSTEM

- Polycarbonate diffuser.
- Field selectable 2700k(soft white), 3000k(warm white), 3500k(warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures*.
- 06-DK4-8L-KFS to provide a range delivers 741 to 830 nominal lumens*.
- 06-DK6-10L-KFS to provide a range delivers 1153 to 1268 nominal lumens*.
- Long-life LEDs provide 134,000 hours of operation with at least 70% of initial lumen output (L70), and 41,000 hours with at least 90% of initial lumen output (L90)**.
- Beam angle 120°.
- Color rendering index > 90.

MOUNTING

- Surface mounting and retrofit installation.
- Covered ceiling mount .

CODE COMPLIANCE

- cETLus listed for wet locations.
- Energy Star certified.
- Complies with FCC part 15, class B.
- Complies with Title 24.

WARRANTY

- 5-year warranty on all electronics and housing.

*Default 4000K color temperature and highest lumen output.

**L70 & L90 hours are IES TM-21-11 calculated hours.



Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
06-DK4-8L-KFS	5.87	5.87	0.87	0.35
06-DK6-10L-KFS-OS	7.22	7.22	0.9	0.49



PRODUCT PARAMETERS

MODEL	NOMINAL LUMEN OUTPUT	KELVIN (SELECTABLE)	
06-DK4	8L = 800 lm	KFS	2700/ 3000/ 3500/ 4000/ 5000K
06-DK6	10L = 1000 lm		



06-DK SERIES

DISK LIGHT KELVIN FIELD SELECTABLE

COMPATIBLE DIMMERS & CONTROLS

PROJECT
TYPE
CATALOG #

Manufacturer	Model Number		
Lutron	TG-600PR-WH	SLV-600P-AL	DVCL-153P
	S-600PR-WH	DV-600PR-WH	MSCL-OP153M
	CTCL-153PDH-WH	SCL-153PH-WH	PD-6WCL
	TGCL-153PH-LA	GT-600P	MACL-153M//MA-R
Leviton	6672	6674	IPL06
	RNL06	DSL06	-

LUMEN TABLE & ELECTRICAL DATA

Series	Measure-ments		Mid Lumens				
			2700K	3000K	3500K	4000K	5000K
06-DK4-8L-KFS	Lumens		741	773	829	832	830
	Watt		9.82	9.84	9.96	9.91	9.88
	Efficacy		75.50	78.51	83.23	83.91	84.02
	Input Current (A)	120V	0.08	0.08	0.08	0.08	0.08

Series	Measure-ments		Mid Lumens				
			2700K	3000K	3500K	4000K	5000K
06-DK6-10L-KFS	Lumens		1,153	1,206	1,289	1,277	1,268
	Watt		14.26	14.42	14.69	14.45	14.37
	Efficacy		80.86	83.63	87.75	88.37	88.24
	Input Current (A)	120V	0.12	0.12	0.12	0.12	0.12


PROJECT
TYPE
CATALOG #

06-DK SERIES

DISK LIGHT KELVIN FIELD SELECTABLE

DIMENSIONAL DRAWINGS

06-DK4-8L-KFS

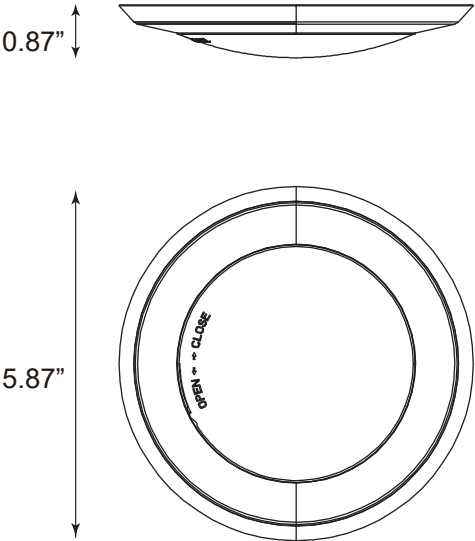

06-DK6-10L-KFS

