

10-SW-LKFS

LUMEN AND KELVIN FIELD SELECTABLE STAIRWELL LUMINAIRE

FEATURES

- Field selectable 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures*
- Long-life LEDs provide 190,000 hours of operation with at least 70% of initial lumen output (L70), and 58,000 hours with at least 90% of initial lumen output (L90)**
- Selectable lumen outputs range from 4200 nominal lumens to 6000 nominal lumens
- Universal 120-277 AC voltage (50-60Hz) is standard
- 0-10vdc dimming drivers are standard
- Power factor > 0.90
- Total harmonic distortion < 20%
- Color rendering index > 80
- Painted steel housing and PMMA (polymethyl methacrylate) frosted lenses are standard
- Specifically designed to sense motion and illuminate both up and down stairwells (see figure 1)
- Optional occupancy dimming sensor available
- Easy installation in new construction or retrofit

MOUNTING OPTIONS

- Surface Mounting

WARRANTY/LISTING

- cULus listed for damp locations ambient temperatures from -20°C to 50°C (-4°F to 122°F)
- cULus 1598 and 924 listed
- Complies with FCC Part 15, class A
- Complies with IEEE C.62.41-1991, input transient protection (2.0kV)
- 5-Year Warranty of all electronics and housing

PRODUCT PARAMETER

MODEL	LUMEN OUTPUT/ COLOR TEMPERATURE		OCCUPANCY SENSOR AND DIMMING ^{1,2}		OPTIONAL EMERGENCY DRIVER		ACCESSORIES (ORDER SEPARATELY)		
10-SW	LKFS*	Selectable Lumens	Selectable CCT	Blank ODS	No Sensor Occupancy Dimming Sensor	EM5	600 lumens	HD03R	Sensor remote control
		4,200 lm	3500k			EM10	1200 lumens		
		4,800 lm	4000k			EM13	1560 lumens		
		6,000 lm	5000k			BLANK	No emergency driver		


¹ Remote control required for programming (sold separately).

² Default sensor settings: detection area = 100%, hold time = 5 seconds, daylight threshold = disabled, stand-by period = 0 seconds, stand-by dimming level = 10%

PROJECT
TYPE
CATALOG #



DIMENSIONS

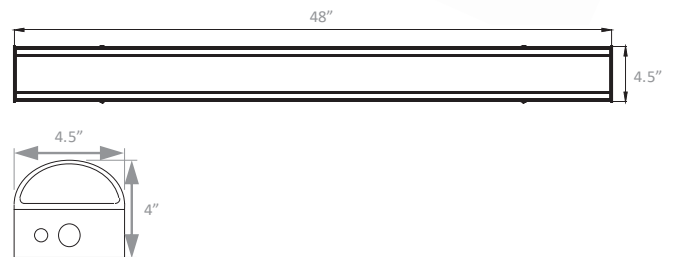

Model	Length (L)	Width (W)	Height (H)	Weight
10-SW-LKFS	48"	4.5"	4"	8 lbs.

