

PROJECT
TYPE
CATALOG #

# 20-VTS-LKFS

## LUMEN AND KELVIN FIELD SELECTABLE VAPOR TIGHT SLIM

### FEATURES

- Field selectable 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures
- Long-life LEDs provide 187,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ), and 57,000 hours with at least 90% of initial lumen output ( $L_{90}$ )\*
- Selectable lumen outputs range from 5,000, 6,000 to 7,000 nominal lumens and uses 35, 45, to 50 watts
- Universal 120-277 AC voltage (50-60Hz) is standard
- 0-10vdc dimming is standard
- Power factor > 0.90
- Total harmonic distortion < 20%
- Color rendering index > 80
- Steel housing
- Polycarbonate lens
- Easy installation in new construction or retrofit applications


\*  $L_{70}$  hours are IES TM-21-11 calculated hours

### WARRANTY & LISTINGS

- cULus listed for wet locations
- Complies with FCC Part 15, class A
- Complies with IEEE C.62.41-1991, input transient protection (2.5kV)
- Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level)
- 5-year warranty of all electronics and housing



### DIMENSIONS

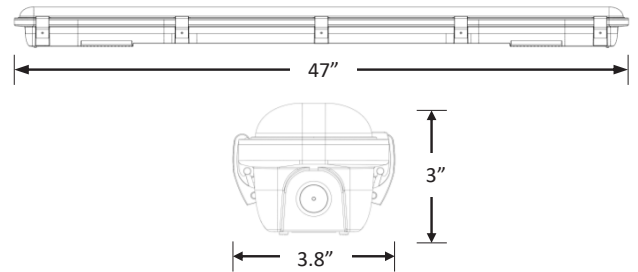

**Weight: 4.6 lbs.**

### PRODUCT PARAMETER

MODEL	NOMINAL LUMENS		SELECT	OCCUPANCY SENSOR		INTERNALLY INSTALLED EMERGENCY DRIVERS	
20-VTS	7L	7,000	LKFS	ODS	MICROWAVE SENSOR	EM10	
				BLANK	NO OCCUPANCY SENSOR	EM13	
						BLANK	NO EMERGENCY DRIVER