



PROJECT
TYPE
CATALOG #

11-DR DRYER / RANGE RECEPTACLE

Residential Grade

FEATURES:

- 30/50 AMP 125/250
- 3-Pole, 4 Wire
- 14-30R/14-50R Nema Configuration
- Max Voltage 30/50 Amp
- 4 AWG Conductors
- UL Listed
- Fits all wall plates with 2.15 in. Diameter center hole
- Terminals marked for easy identification and fast wiring
- All mounting hardware included
- Flush-mount devices fit single or 2-Gang outlet boxes
- Easy-to-wire terminals accept up to number 4 AWG conductors
- Flammability UL94, V2 Rating
- High Impact-Resistant Chemical-Resistant Nylon
- Reinforced Thermoplastic Polyester

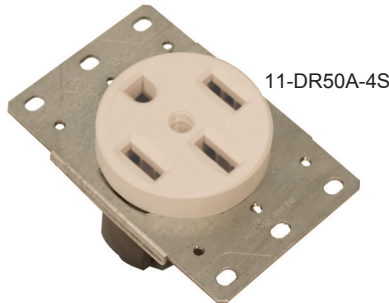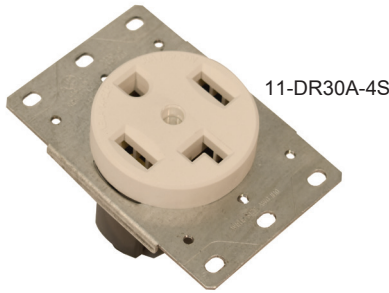

MODEL	DESCRIPTION	COLOR
11-DR30A-4S	30 Amp	White
11-DR50A-4S	50 Amp	

FEATURES:

- Made of 430 Stainless Steel
- Different surface finish available: painting and stainless steel
- Provides extended life in abusive and corrosive environments
- Contemporary smooth finish and contoured edges enhance installation appearance
- Smooth finish without recessed lines is easy to clean and maintain attractive appearance

Power Outlet Receptacle-Two Gang Stainless Steel Wallplates

MODEL	DESCRIPTION	MATERIAL
11-DDR-PL2-SS	2 Gang Power Outlet 2.125" dia. Hole	Stainless Steel



TESTING & CODE COMPLIANCE:

- UL/CUL Listed
- ISO9001 Registered Manufacturing Facility

MATERIAL CHARACTERISTICS:

- Environmental:
Flammability UL94, V2 Rating
- Operating Temperature:
From -40°C (without impact)
to 75°C maximum continuous