

PROJECT
TYPE
CATALOG #

# 11-GFCI-ST-15TRWR-WH-K

## DECORATOR RECEPTACLES Residential Grade



### FEATURES

- 2017 Version Tamper Resistant Standard GFCI Receptacle
- Meet UL/CUL943, UL498
- Prevents line load reversal miswire
- Automatic end of life detection (EOL), Self testing every 2.5HRS
- Able to detect up to 5mA of leakage current. Trips within 0.025 seconds
- 125V 15Amp
- cETLus approved



MODEL	DESCRIPTION	COLOR
11-GFCI-ST-15TRWR-WH-K	Duplex Receptacle, 15A/125V, 5-15R	White

### ELECTRICAL

Certified UL948 compliant  
Device able to withstand AC shock of up to 10kV  
Isolation ration up to 1240V


### MECHANICAL

Wire AWG from #10 to minimum #14 single  
coil Copper conductor.

### TOLERANCE

PCB classification UL 94V-2  
Operating temp. UL rating if  
35° to 66° C

Dimension in mm [inches]

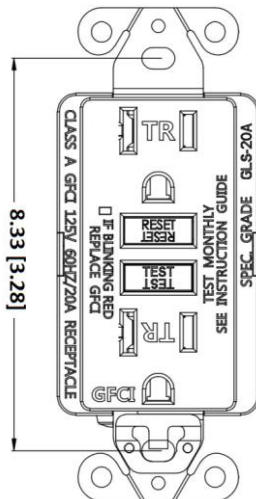

11-DP1-WH



11-DP2-WH