

| |
|-----------|
| PROJECT |
| TYPE |
| CATALOG # |

11-GFCI-ST-20TR-WH-K

DECORATOR RECEPTACLES

Residential Grade



FEATURES

- 2017 Version Tamper Resistant Standard GFCI Receptacle
- Meet UL/CUL943, UL498
- Prevents line load reversal miswire
- Automatic end of life detection (EOL), Self testing every 2.5HRS
- Able to detect up to 5mA of leakage current. Trips within 0.025 seconds
- 125V 15Amp
- cETLus approved



| MODEL | DESCRIPTION | COLOR |
|----------------------|------------------------------------|-------|
| 11-GFCI-ST-20TR-WH-K | Duplex Receptacle, 15A/125V, 5-15R | White |

ELECTRICAL

Certified UL948 compliant
Device able to withstand AC shock of up to 10kV
Isolation ration up to 1240V


MECHANICAL

Wire AWG from #10 to minimum #14 single
coil Copper conductor.

TOLERANCE

PCB classification UL 94V-2
Operating temp. UL rating if
35° to 66° C

Dimension in mm [inches]

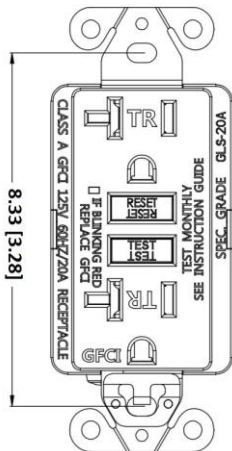

11-DP1-WH



11-DP2-WH