

PROJECT
TYPE
CATALOG #

# 20-HBLSR

## SENSOR READY LINEAR HIGH BAY LUMEN & KELVIN SELECTABLE

### ELECTRICAL

- Universal 120-277V AC voltage (50-60Hz) is standard. 347-480V achieved with step-down transformers is optional.
- 0-10vdc dimming drivers are standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Emergency driver option available.

### OPTICAL SYSTEM

- Field selectable 4000k (neutral white) and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide 134,000 hours of operation with at least 70% of initial lumen output (L70), and 40,000 hours with at least 90% of initial lumen output (L90).\*\*
- LED color maintenance < 0.003 chromaticity shift ( $\Delta u'v'$ ) over the initial 6,000 hours of operation.
- Tri-lumen selectable delivers 12,000 to 60,000 nominal lumens (see lumen table on page 3).\*\*\*
- Medium distribution is standard with optional narrow or wide distribution lenses.
- Color rendering index > 80.

### CODE COMPLIANCE


- cULus listed for damp locations in ambient temperatures from -40°C to 50°C (-40°F to 122°F). 07-HBLSR-181512L-4K5K = 55°C (131°F).
- Input transient surge protection = 6kV.
- Complies with FCC Part 15, class A.
- 5-Year Warranty on all electronics and housing.

### HOUSING

- Painted steel housing (stamped) and polycarbonate lenses are standard.
- Wire guards available.

### MOUNTING

- Chain-mount kit (includes v-hooks and 1-meter-long chain) are standard.
- Optional pendant mounting kit provides pendant attachment to ½" rigid conduit.
- Optional surface mounting kit provides attachment to solid surfaces.
- Optional cable mount kit provides luminaire suspension.

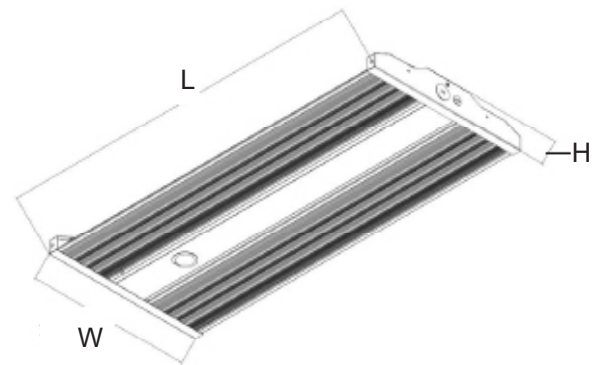

Model	Size (inches) & Weight (lbs)			
	L	W	H	Weight
20-HBLSR-181512L-4K5K	16.5	10.25	1.8	4.6
20-HBLSR-241815L-4K5K	23	10.25	1.8	7
20-HBLSR-363024L-4K5K	31	10.25	1.8	9.5
20-HBLSR-604836L-4K5K	44	10.25	1.8	12



\* Default kelvin temperature = 4000k.  
 \*\* L<sub>70</sub> & L<sub>90</sub> hours are IES TM-21-11 calculated hours  
 \*\*\*Default power settings = highest lumen output.  
 †UNC option not compatible with EM25 emergency driver

## PRODUCT PARAMETERS

MODEL	NOMINAL LUMEN SLECTABLE	SELECTABLE COLOR TEMPERATURE	INPUT VOLTAGE <sup>1</sup>	LENS DISTRIBUTION	EMERGENCY DRIVER <sup>1</sup>
20-HBLSR	181512L = 18,000/15,000/12,000 241815L = 24,000/18,000/15,000 363024L = 36,000/30,000/24,000 604836L = 60,000/48,000/36,000	4K5K = 4000K, 5000K selectable	UNC = 347-480V BLANK = 120-277V	ND = NARROW WD = WIDE BLANK = MEDIUM	EM25 = 25W EMERGENCY DRIVER (FACTORY INSTALLED) BLANK = NO EMERGENCY DRIVER



PROJECT
TYPE
CATALOG #

# 20-HBLSR

## SENSOR READY LINEAR HIGH BAY

### LUMEN & KELVIN SELECTABLE

#### ACCESSORIES (order separately)

##### Sensor

- 20-HD07VR-PH-1 = Passive infrared sensor - maximum mounting height = 39 FT, factory settings: detection area = 100%, hold time = 5 sec, stand-by period = 0 sec, stand-by dimming level = 10%, daylight threshold = disabled
- 20-HD07VR-MH-B-1 = Microwave step-dimming sensor - maximum mounting height = 49 FT, factory settings: detection area = 100%, hold time = 5 sec, stand-by period = 0 sec, stand-by dimming level = 10%, daylight threshold = disabled
- 20-HD05R = Remote control for HD07VR-PH-1 & HD07VR-MH-B-1 (required to change factory settings)

##### Lens

- 20-HBLSR-LENS-181512L-ND = Narrow distribution lens for HBLSR-181512L-4K5K
- 20-HBLSR-LENS-241815L-ND = Narrow distribution lens for HBLSR-241815L-4K5K
- 20-HBLSR-LENS-363024L-ND = Narrow distribution lens for HBLSR-363024L-4K5K
- 20-HBLSR-LENS-604836L-ND = Narrow distribution lens for HBLSR-604836L-4K5K
- 20-HBLSR-LENS-181512L-MD = Medium distribution lens for HBLSR-181512L-4K5K (ships with luminaire standard)
- 20-HBLSR-LENS-241815L-MD = Medium distribution lens for HBLSR-241815L-4K5K (ships with luminaire standard)
- 20-HBLSR-LENS-363024L-MD = Medium distribution lens for HBLSR-363024L-4K5K (ships with luminaire standard)
- 20-HBLSR-LENS-604836L-MD = Medium distribution lens for HBLSR-604836L-4K5K (ships with luminaire standard)
- 20-HBLSR-LENS-181512L-WD = Wide distribution lens for HBLSR-181512L-4K5K
- 20-HBLSR-LENS-241815L-WD = Wide distribution lens for HBLSR-241815L-4K5K
- 20-HBLSR-LENS-363024L-WD = Wide distribution lens for HBLSR-363024L-4K5K
- 20-HBLSR-LENS-604836L-WD = Wide distribution lens for HBLSR-604836L-4K5K

##### Wire Guard

- 20-HBLSR-WG-181512L = Wire guard kit for HBLSR-181512L-4K5K
- 20-HBLSR-WG-241815L = Wire guard kit for HBLSR-241815L-4K5K
- 20-HBLSR-WG-363024L = Wire guard kit for HBLSR-363024L-4K5K
- 20-HBLSR-WG-604836L = Wire guard kit for HBLSR-604836L-4K5K

##### Mounting Options

- 20-HBLSR-SMK = Surface mount kit for HBLSR - all models (not compatible with UNC or EM25 options)
- 20-HBLSR-PMK = Pendant mount for HBLSR - all models (not compatible with UNC or EM25 options)
- 20-LEDFHB-CMK3 = Cable mount kit, 3 meters long - all models
- 20-LEDFHB-CMK5 = Cable mount kit, 5 meters long - all models

#### COMPATIBLE EMERGENCY DRIVERS (internally installed\*)

Emergency Driver Part Number	EM25	
	Watt	EM Lumens
20-HBLSR-181512L-4K5K	25	3750
20-HBLSR-241815L-4K5K	25	3750
20-HBLSR-363024L-4K5K	25	3750
20-HBLSR-604836L-4K5K	25	3750

#### COMPATIBLE DIMMERS & CONTROLS

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
Best Lighting	DWS-010V-T	10%-100%	600W
Best Lighting	DWS-010V-D	10%-100%	600W
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W



PROJECT
TYPE
CATALOG #

# 20-HBLSR

SENSOR READY LINEAR HIGH BAY  
LUMEN & KELVIN SELECTABLE

## ELECTRICAL DATA

Series	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
20-HBLSR-181512L-4K5K	Lumens	12,007	12,307	14,555	15,071	18,085	18,421
	Watts	76	77	96	98	120	123
	Efficacy	158	159	152	154	150	150
	Input Current (A)	120V = 0.63A	120V = 0.64A	120V = 0.80A	120V = 0.82A	120V = 1.00A	120V = 1.03A
		240V = 0.32A	240V = 0.32A	240V = 0.40A	240V = 0.41A	240V = 0.50A	240V = 0.51A
		277V = 0.27A	277V = 0.28A	277V = 0.35A	277V = 0.35A	277V = 0.43A	277V = 0.44A

Series	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
20-HBLSR-241815L-4K5K	Lumens	15,021	15,557	18,017	18,477	24,047	24,241
	Watts	94	96	115	117	158	158
	Efficacy	159	162	157	158	152	153
	Input Current (A)	120V = 0.78A	120V = 0.80A	120V = 0.96A	120V = 0.98A	120V = 1.32A	120V = 1.32A
		240V = 0.39A	240V = 0.40A	240V = 0.48A	240V = 0.49A	240V = 0.66A	240V = 0.66A
		277V = 0.34A	277V = 0.35A	277V = 0.42A	277V = 0.42A	277V = 0.57A	277V = 0.57A



PROJECT
TYPE
CATALOG #

# 20-HBLSR

SENSOR READY LINEAR HIGH BAY  
LUMEN & KELVIN SELECTABLE

## ELECTRICAL DATA

Series	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
20-HBLSR-363024L-4K5K	Lumens	24,049	24,854	30,037	30,299	35,517	36,076
	Watts	152	155	193	197	237	242
	Efficacy	158	160	156	154	150	149
	Input Current (A)	120V = 1.27A	120V = 1.29A	120V = 1.61A	120V = 1.64A	120V = 1.98A	120V = 2.02A
		240V = 0.63A	240V = 0.65A	240V = 0.80A	240V = 0.82A	240V = 0.99A	240V = 1.01A
		277V = 0.55A	277V = 0.56A	277V = 0.70A	277V = 0.71A	277V = 0.86A	277V = 0.87A

Series	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
20-HBLSR-604836L-4K5K	Lumens	37,049	38,465	48,182	49,009	60,104	61,319
	Watts	236	241	312	317	404	412
	Efficacy	157	160	154	155	149	149
	Input Current (A)	120V = 1.97A	120V = 2.01A	120V = 2.60A	120V = 2.64A	120V = 3.37A	120V = 3.43A
		240V = 0.98A	240V = 1.00A	240V = 1.30A	240V = 1.32A	240V = 1.68A	240V = 1.72A
		277V = 0.85A	277V = 0.87A	277V = 1.13A	277V = 1.14A	277V = 1.46A	277V = 1.49A

# 20-HBLSR

## SENSOR READY LINEAR HIGH BAY LUMEN & KELVIN SELECTABLE

### PHOTOMETRIC DATA

#### 20-HBLSR-181512L-4K5K


##### Luminaire Data

Description	Linear High Bay Lumen/Kelvin Selectable
Total Lumens	18,423
Input Wattage	123
Efficacy (lm/W)	150
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.18
Photometrics calculated at 5000k - high lumens setting	

##### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	3,402	18.5%
0-30°	7,155	38.8%
0-40°	11,161	60.6%
20-50°	10,840	58.8%
40-70°	6,281	34.1%
0-60°	16,247	88.2%
0-80°	18,156	98.6%
0-90°	18,423	100.0%
90-180°	0	0.0%
0-180°	18,423	100.0%

PROJECT
TYPE
CATALOG #

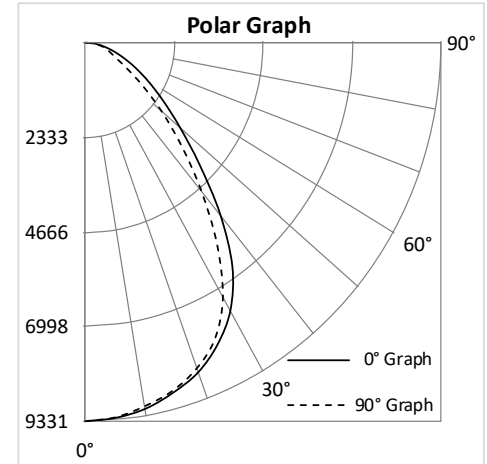


#### 20-HBLSR-241815L-4K5K

##### Luminaire Data

Description	Linear High Bay Lumen/Kelvin Selectable
Total Lumens	24,269
Input Wattage	158
Efficacy (lm/W)	153
Spacing Criterion (0-180°)	1.24
Spacing Criterion (90-270°)	1.18
Photometrics calculated at 5000k - high lumens setting	

##### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	4,468	18.4%
0-30°	9,398	38.7%
0-40°	14,661	60.4%
20-50°	14,249	58.7%
40-70°	8,283	34.1%
0-60°	21,353	88.0%
0-80°	23,902	98.5%
0-90°	24,269	100.0%
90-180°	0	0.0%
0-180°	24,269	100.0%

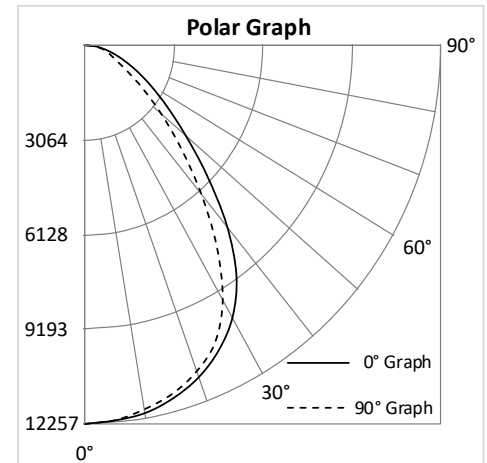

# 20-HBLSR

## SENSOR READY LINEAR HIGH BAY

### LUMEN & KELVIN SELECTABLE

PROJECT
TYPE
CATALOG #


#### 20-HBLSR-363024L-4K5K

##### Luminaire Data

Description	Linear High Bay Lumen/Kelvin Selectable
Total Lumens	36,087
Input Wattage	242
Efficacy (lm/W)	149
Spacing Criterion (0-180°)	1.24
Spacing Criterion (90-270°)	1.18
Photometrics calculated at 5000k - high lumens setting	

##### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	6,560	18.2%
0-30°	13,802	38.2%
0-40°	21,585	59.8%
20-50°	21,143	58.6%
40-70°	12,526	34.7%
0-60°	31,718	87.9%
0-80°	35,540	98.5%
0-90°	36,087	100.0%
90-180°	0	0.0%
0-180°	36,087	100.0%

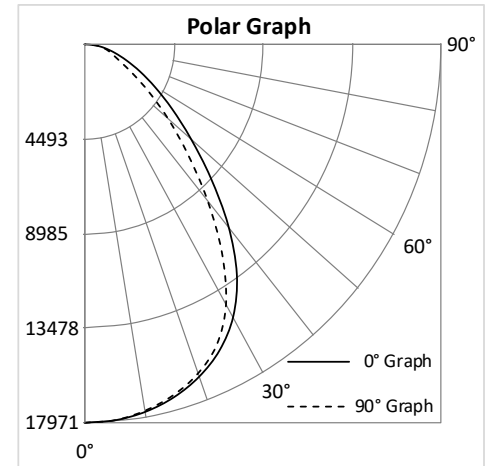


#### 20-HBLSR-604836L-4K5K

##### Luminaire Data

Description	Linear High Bay Lumen/Kelvin Selectable
Total Lumens	61,323
Input Wattage	412
Efficacy (lm/W)	149
Spacing Criterion (0-180°)	1.24
Spacing Criterion (90-270°)	1.18
Photometrics calculated at 5000k - high lumens setting	

##### Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	11,100	18.1%
0-30°	23,335	38.1%
0-40°	36,491	59.5%
20-50°	35,901	58.5%
40-70°	21,535	35.1%
0-60°	53,908	87.9%
0-80°	60,446	98.6%
0-90°	61,323	100.0%
90-180°	0	0.0%
0-180°	61,323	100.0%

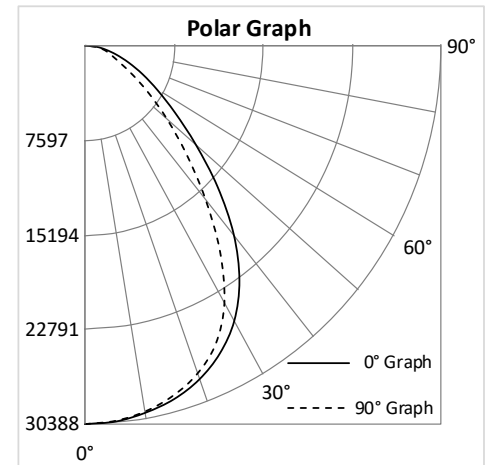



PROJECT
TYPE
CATALOG #

# 20-HBLSR

## SENSOR READY LINEAR HIGH BAY

### LUMEN & KELVIN SELECTABLE

#### CORDS & PLUGS

When ordering a cord/cord & plug, use the following suffix choices.

Example: 20-HBLSR-181512L-4K5K-10C4.

Note: cord & plugs do not affect the ability to install sensors.

Part number suffix	Description	For use with
6C3	6' cord - 3 conductor (black/white/green)	Standard & UNC
6C4	6' cord - 4 conductor (black/white/green/red)	EM driver
6C5	6' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & UNC)
6C6	6' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
10C3	10' cord - 3 conductor (black/white/green)	Standard & UNC
10C4	10' cord - 4 conductor (black/white/green/red)	EM driver
10C5	10' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & UNC)
10C6	10' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
15C3	15' cord - 3 conductor (black/white/green)	Standard & UNC
15C4	15' cord - 4 conductor (black/white/green/red)	EM driver
15C5	15' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & UNC)
15C6	15' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
6W3	6' whip - 3 conductor (black/white/green)	Standard & UNC
6W4	6' whip - 4 conductor (black/white/green/red)	EM driver
6W5	6' whip - 5 conductor (black/white/green/purple/pink)	Dimming (standard & UNC)
6W6	6' whip - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
6P515	6' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
6P615	6' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
6P715	6' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
6P520	6' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
6P620	6' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
6P515L	6' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
6P615L	6' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
6P715L	6' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
6P520L	6' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
6P620L	6' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
6P720L	6' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
6P2420L	6' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	UNC luminaire
6P820L	6' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	UNC luminaire
10P515	10' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
10P615	10' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
10P715	10' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
10P520	10' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
10P620	10' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
10P515L	10' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
10P615L	10' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
10P715L	10' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
10P520L	10' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
10P620L	10' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
10P720L	10' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
10P2420L	10' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	UNC luminaire
10P820L	10' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	UNC luminaire
15P515	15' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
15P615	15' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
15P715	15' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
15P520	15' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
15P620	15' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
15P515L	15' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
15P615L	15' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
15P715L	15' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
15P520L	15' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
15P620L	15' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
15P720L	15' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
15P2420L	15' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	UNC luminaire
15P820L	15' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	UNC luminaire