

PROJECT
TYPE
CATALOG #

06-CDR4

4" ARCHITECTURAL DOWNLIGHT - LKFS

HOUSING

- Aluminum Housing

ELECTRICAL

- Universal 120-277 AC voltage (50-60Hz) is standard.
- EN61000-4-5 surge protection (1.5kV).
- Power factor > 0.90.
- Uses 12, 9, or 6 nominal watts
- 0-10VDC dimming is standard.

OPTICAL SYSTEM

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.
- Field selectable lumen output: CDR4-1L-LKFS-WHT = 1,000, 800, or 500 nominal lumens. CDR4-1L-LKFS-SW = 1,000, 800, or 500 nominal lumens
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 149,000 hours of operation.**
- Color rendering index (Ra) > 90.

MOUNTING


- Easy installation in new construction or retrofit applications.
- Compatible with 4.35" ceiling cut-outs and 4" mounting frames
- Type IC. Access above ceiling required. Covered ceiling mount only

CODE COMPLIANCE

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1.5kV).

WARRANTY

- 5-year warranty of all electronics and housing

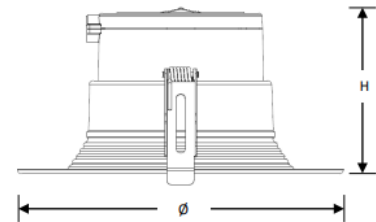

Series	ø	H	Weight
CDR4-1L-LKFS-WHT	5.1"	3.2"	0.7 lbs
CDR4-1L-LKFS-SW	5.1"	3.2"	0.7 lbs

**L₇₀ hours are IES TM-21-11 calculated hours



PRODUCT PARAMETERS

MODEL	NOMINAL LUMEN OUTPUT (Selectable)		CCT (Selectable)	BAFFLE TYPE
06-CDR4	1L	1,000lm / 800lm / 500lm	LKFS	WHT = White Baffle SW = Specular White