



**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM



Discover
the advantage of
Lumen and **Kelvin**
Selectable

Call our lighting pros!

877.664.5483

Contractorlighting.com

2024
**PRODUCT
CATALOG**

TABLE OF CONTENTS

STRIPS LIGHTS 3

STAIRWELL LIGHT 3

HIGHBAYS 4

WRAPS 6

UNDERCABINET 6

LED REPLACEMENT TUBES 7

VAPORTIGHT 8

CENTER BASKETS AND PANEL LIGHTS 9

ARCHITECTURAL RECESSED LIGHTS 10

LED RECESSED TRIMS & CANS 11

RETROFIT FLAT PANEL RECESSED LIGHTS 13

SURFACE MOUNTS 13

MULTI-PURPOSE AREA LIGHTS 15

BOLLARDS 15

WALL PACKS 16

CANOPY LIGHT 17

DUSK-TO-DAWN 17

EXIT SIGN & EMERGENCY LIGHTING & COMBOS 18

EMERGENCY POWER SYSTEMS 20

SENSORS & DIMMERS 21

SWITCHES & RECEPTACLES 22

WIRE CONNECTORS / CABLE TIES / GOOF RINGS 23

CORDS / PLUGS / WHIPS 23

INDOOR

OUTDOOR

**LIFE
SAFETY**



STRIP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SL-4FT-5L-LKFS	5,203 lumens	34	152 lm/W	3500K/4000K/5000K	47.3"	3.3"	3.5"
	4,317 lumens	30	143 lm/W				
	3,631 lumens	25	143 lm/W				
10-SL-8FT-10L-LKFS	10,124 lumens	68	149 lm/W	3500K/4000K/5000K	94.2"	3.3"	3.5"
	8,483 lumens	60	141 lm/W				
	7,135 lumens	55	130 lm/W				




STRIP LIGHT SLIM

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensors
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SLS-4FT-5L-LKFS	5,025 lumens	33	151 lm/W	3500K/4000K/5000K	47.3"	2.4"	2.8"
	4,305 lumens	30	143 lm/W				
	3,622 lumens	25	143 lm/W				
10-SLS-8FT-10L-LKFS	9,976 lumens	67	149 lm/W	3500K/4000K/5000K	94.2"	2.4"	2.8"
	8,862 lumens	58	152 lm/W				
	7,567 lumens	48	156 lm/W				

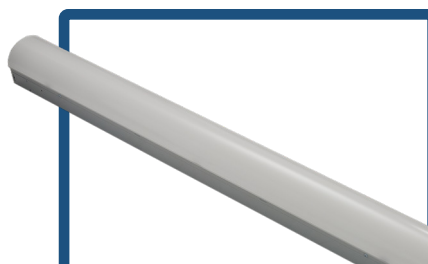

STAIRWELL LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional occupancy/dimming sensor
- L70 = 190,000 hours
- Emergency drivers available
- Field selectable output and color temperature



Product Number	Selectable Lumen Output*	Watts*	Efficacy	Selectable CCT*	Length (in)	Width (in)	Height (in)
10-SW-LKFS	6,499 lumens	45	146 lm/W	3500K/4000K/5000K	48"	4.5"	4"
	4,941 lumens	33	150 lm/W				
	4,311 lumens	28	152 lm/W				

* Nominal values shown for CCT set at 4000K



PREMIUM ROUND HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- 0-10Vdc dimming
- Field selectable output and color temperature
- Sensor Ready- screw in receptacle
- Optional Passive Infrared photocell (PIR) or Microwave sensor sold separately
- L70 = 146,000 hours
- Available in black or white



Accessories Sold Separately

20-HD07VR-PH-1 = Passive Infrared Sensor
 20-HD07VR-MH-B-1 = Microwave step-dimming sensor
 20-HBSD-325W-480-277 = 347-480V step-down transformer
 20-HBRSR-ALREF-S = 90° aluminum reflector - 07-HBRSR-221816L-4K5K models
 20-HBRSR-PCREF-S = 90° polycarbonate reflector - 07-HBRSR-221816L-4K5K models
 20-HBRSR-ALREF-L = 90° aluminum reflector - 07-HBRSR-353024L-4K5K models
 20-HBRSR-PCREF-L = 90° polycarbonate reflector - 07-HBRSR-353024L-4K5K models
 20-HBRSR-YOKE-WHT = Yoke mount - all models - white
 20-HBRSR-YOKE-BLK = Yoke mount - all models - black
 20-LEDHBSR-PSH-PRM-V2 = Pendant snap hook - all models

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Diameter (in)	Height (in)
20-HBRSR-221816L-LKFS	22,935 lumens 18,790 lumens 15,891 lumens	147 115 95	156 lm/W 163 lm/W 168 lm/W	4000K/5000K	10.6"	5.5"
20-HBRSR-353024L-LKFS	35,716 lumens 30,801 lumens 24,368 lumens	229 192 146	156 lm/W 160 lm/W 167 lm/W	4000K/5000K	13"	5.6"



Mounting Options

20-LEDFHB-SMK	Surface-mounting kit
20-LEDFHB-PMK	Pendant-mount kit
20-LEDFHB-CMK3	Cable-mounting kit, 3 meters long
20-LEDFHB-CMK5	Cable-mounting kit, 5 meters long
20-LEDFHB-WG	Wire-guard

FULL-BODY LED HIGH BAY

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional clear and diffuse lenses available
- L70 = 122,000 hours
- Emergency drivers available
- Surface and cable mounting methods available
- Optional wire guard available



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
20-LEDFHB90	12,394 lumens	87	142 lm/W	5000K	23.75"	12.625"	3.625"
20-LEDFHB135	18,564 lumens	132	141 lm/W	5000K	23.75"	12.625"	3.625"
20-LEDFHB180	24,603 lumens	175	141 lm/W	5000K	23.75"	12.625"	3.625"
20-LEDFHB265	37,996 lumens	267	142 lm/W	5000K	45.875"	12.625"	3.625"
20-LEDFHB320	44,460 lumens	320	139 lm/W	5000K	45.875"	12.625"	3.625"
20-LEDFHB425	60,629 lumens	428	142 lm/W	5000K	45.875"	12.625"	3.625"

* Nominal values shown for CCT set at 4000K



PREMIUM LINEAR HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- Sensor ready
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional occupancy sensor
- L70 = 134,000 hours
- Emergency drivers available
- Optional narrow or wide distribution



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-HBLSR-181512L-LKFS	18,085 lumens 14,555 lumens 12,007 lumens	120 96 76	150 lm/W 152 lm/W 158 lm/W	4000K/5000K	16.5"	10.25"	1.8"
20-HBLSR-241815L-LKFS	24,047 lumens 18,017 lumens 15,021 lumens	158 115 94	152 lm/W 157 lm/W 159 lm/W	4000K/5000K	23"	10.25"	1.8"
20-HBLSR-363024L-LKFS	35,517 lumens 30,037 lumens 24,049 lumens	237 193 152	150 lm/W 156 lm/W 158 lm/W	4000K/5000K	31"	10.25"	1.8"
20-HBLSR-604836L-LKFS	60,104 lumens 48,182 lumens 37,049 lumens	404 312 236	149 lm/W 154 lm/W 157 lm/W	4000K/5000K	44"	10.25"	1.8"



LINEAR ADJUSTABLE HIGH BAY

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional Passive Infrared or microwave sensor
- L70 = 174,000 hours
- Optic panels rotate up to 135 degrees



Accessories Sold Separately

20-HBLA-WGK-24X4	Wire-guard kit – 15L & 23L
20-HBLA-WGK-24X5	Wire-guard kit – 30L
20-LEDHB-PMK-S	Pendant mount kit – all models
20-LEDHB-SMK-S	Surface mount kit – all models

Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
20-HBLA-15L-4K	15,297 lumens	109	140 lm/W	4000K	26"	12"	2"
20-HBLA-15L-5K	15,471 lumens	109	141 lm/W	5000K	26"	12"	2"
20-HBLA-23L-4K	22,970 lumens	166	139 lm/W	4000K	26"	12"	2"
20-HBLA-23L-5K	23,223 lumens	166	140 lm/W	5000K	26"	12"	2"
20-HBLA-30L-4K	30,394 lumens	217	140 lm/W	4000K	26"	12"	2"
20-HBLA-30L-5K	30,741 lumens	217	142 lm/W	5000K	26"	12"	2"

* Nominal values shown for CCT set at 4000K



ECONOMY WRAP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- L70 = 196,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-WRE-6L-LKFS	5,880 lumens 5,017 lumens 3,925 lumens	45 40 30	131 lm/W 129 lm/W 131 lm/W	3500K/4000K/5000K	47.6"	5.4"	2"




ECONOMY UNDER CABINET LIGHT

- Standard 120Vac input
- Power factor >0.90
- CRI >90
- Triac dimming
- Field selectable color temperature
- L70 = 196,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
05-UCE-9-KFS	412	5	86 lm/W	27K/30K/35K/40K/50K	9"	3.5"	1"
05-UCE-12-KFS	450	5	92 lm/W	27K/30K/35K/40K/50K	12"	3.5"	1"
05-UCE-18-KFS	770	9	88 lm/W	27K/30K/35K/40K/50K	18"	3.5"	1"
05-UCE-21-KFS	764	9	90 lm/W	27K/30K/35K/40K/50K	21"	3.5"	1"
05-UCE-24-KFS	803	9	91 lm/W	27K/30K/35K/40K/50K	24"	3.5"	1"
05-UCE-33-KFS	1,245	14	91 lm/W	27K/30K/35K/40K/50K	33"	3.5"	1"
05-UCE-42-KFS	1,543	18	88 lm/W	27K/30K/35K/40K/50K	42"	3.5"	1"

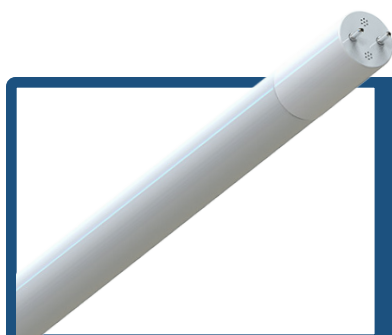

T8 LED REPLACEMENT LAMPS

- Universal voltage 120-277V
- Non-dimming
- CRI>80
- L70 = 54,000 hours
- 02-T8L-7X (8-ft) Series- Double-ended, integrated driver, Type B for bypass only
- 4-ft lamp Series- Single or double-ended, integrated driver, Type B for bypass only




Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
12-T8LIDFH11-2200-4FT-CBA-7T	2,200 lumens	17	130 lm/W	4000K	47.2"	1"	1"
12-T8LIDFH11-2200-4FT-EBA-7T	2,200 lumens	17	130 lm/W	5000K	47.2"	1"	1"
12-T8LIDFH11-5000-8FT-EBA-7X	5,500 lumens	40	138 lm/W	5000K	93.2"	1"	1"
12-L8L1-BPMFH-G2-17W-A8TSE2200-4C	2,100 lumens*	17*	124 lm/W*	Selectable 27 / 30 / 35 / 40 / 50 / 6000K	47.2"	1"	1"



T5 LED REPLACEMENT LAMPS

- Universal 120-277V ac input
- Non-dimming
- L70 = 54,000 hours
- CRI>80
- Double-ended, integrated driver, Type B for bypass only

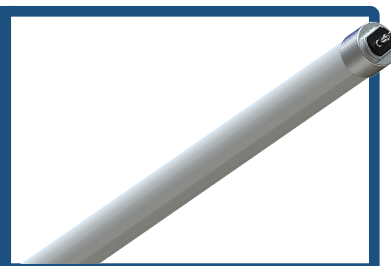

Product Number	Lumen Output	Watts	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
12-T5L-ISFH14-3500-4FT-EBA-01	3,500 Lumens	25	140 Lm/W	5000	45.2"	0.7"	0.7"



PREMIUM WRAP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-WR-5L-LKFS	5,837 lumens 4,932 lumens 4,336 lumens	39 32 28	149 lm/W 152 lm/W 154 lm/W	3500K/4000K/5000K	47.7"	7.1"	2.8"

* Nominal values shown for CCT set at 4000K



VAPOR-TIGHT LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 137,000 hours
- Field Selectable Color Temperature
- ETL Sanitation listed for non-splash food zones to comply with NSF/ANSI 2 standards
- NEMA 4x



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-VT-6L-KFS	6,256 lumens	42	148 lm/W	3500K/4000K/5000K	45.7"	4.7"	4.3"
20-VT-14L-KFS	14,327 lumens	93	156 lm/W	3500K/4000K/5000K	50"	10"	4.1"
20-VT-20L-KFS	21,447 lumens	140	152 lm/W	3500K/4000K/5000K	50"	10"	4.1"



VAPOR-TIGHT SLIM LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 187,000 hours
- Emergency Drivers available
- Field Selectable output and color temperature
- Optional occupancy sensor



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-VTS-7L-LKFS	7,611 lumens 6,198 lumens 5,303 lumens	51 43 36	149 lm/W 144 lm/W 146 lm/W	3500K/4000K/5000K	47"	3.8"	3"



Mounting Accessories and Emergency Drivers (Sold Separately)


10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-FLANGEKIT22-ET	Flange Mounting Kit for 2x2 panel
10-FLANGEKIT24-ET	Flange Mount Kit for 2x4 Panel
10-PNL-CM	Cable Mounting Kit
03-BLEM-CP-5C	Remote Mount Emergency driver - EM5
03-BLEM-CP-10C	Remote Mount Emergency driver - EM10
03-BLEM-CP-13C	Remote Mount Emergency driver - EM13

CENTER BASKET

- Universal voltage 120-277V
- Power factor >0.90
- Field selectable output and color temperature
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-CB22-4L-LKFS	4,370 lumens	31	140 lm/W	3500K/4000K/5000K	23.7"	23.7"	2"
	3,772 lumens	27	142 lm/W				
	3,176 lumens	22	144 lm/W				
10-CB24-6L-LKFS	5,858 lumens	43	137 lm/W	3500K/4000K/5000K	47.8"	23.7"	2"
	5,062 lumens	36	139 lm/W				
	4,556 lumens	32	141 lm/W				

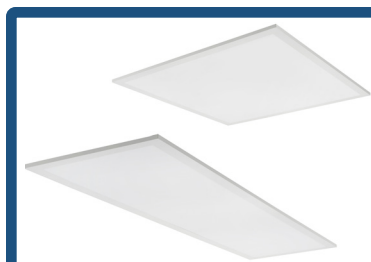

PANEL LIGHTS

- Universal voltage 120-277V
- Power factor >0.90
- Field selectable output and color temperature
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 144,000 hours
- Emergency drivers available
- Flicker-Free per IEEE1789-2015



Mounting Accessories (Sold Separately)

10-SMKT-14	Surface Mount Kit for 1x4 panel
10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-FLANGEKIT14-ET	Flange mount kit for 1x4 panel
10-FLANGEKIT22-ET	Flange Mount Kit for 2x2 panel
10-FLANGEKIT24-ET	Flange Mount Kit for 2x4 Panel
10-PNL-CM	Cable Mounting Kit

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-PNL1X4-40L-LKFS	4,300 lumens	33	131 lm/W	3500K/4000K/5000K	47.7"	11.8"	1.5"
	3,700 lumens	27	137 lm/W				
	2,730 lumens	19	140 lm/W				
10-PNL2X2-40L-LKFS	4,290 lumens	32	135 lm/W	3500K/4000K/5000K	23.7"	23.7"	1.5"
	3,810 lumens	27	142 lm/W				
	2,800 lumens	19	145 lm/W				
10-PNL2X4-50L-LKFS	5,250 lumens	37	141 lm/W	3500K/4000K/5000K	47.7"	23.7"	1.5"
	4,575 lumens	32	144 lm/W				
	3,323 lumens	23	148 lm/W				

* Nominal values shown for CCT set at 4000K



ARCHITECTURAL LED RECESSED DOWNLIGHTS & FRAME KITS

- Universal 120-277V
- 0-10V Dimming
- CRI>80
- New Construction or Remodel application
- Architectural frames with C channel and flat hanger bars (ordered separately) for tie-down to ceiling grids. ZZ-BARHANGER-ARCHCAN-FLAT27"



Trim Part	Frame Kit Part	Lumen Output	Watts	Efficacy	Available CCT	Aperature
06-4T-LED-ARC-21W-3K	06-4C-LED-ARC-FRAME21	1590 lumens	21	76 lm/W	3000 Kelvin	4"
06-4T-LED-ARC-28W-4K	06-4C-LED-ARC-FRAME28	1940 Lumens	28	70 lm/W	4000 Kelvin	4"
06-6T-LED-ARC-28W-3K	06-6C-LED-ARC-FRAME28	2210 Lumens	28	79 lm/W	3000 Kelvin	6"
06-6T-LED-ARC-48W-4K	06-6C-LED-ARC-FRAME48	3770 Lumens	48	79 lm/W	4000 Kelvin	6"
06-8T-LED-ARC-40W-4K	06-8C-LED-ARC-FRAME40	3090 Lumens	40	77 lm/W	4000 Kelvin	8"
06-8T-LED-ARC-52W-4K	06-8C-LED-ARD-FRAME52	4530 Lumens	52	87 lm/w	4000 Kelvin	8"



ARCHITECTURAL LED DOWNLIGHT

- Universal Voltage 120-277V
- Field selectable output and color temperature
- 0-10Vdc dimming
- Power factor >0.90
- L70 = 149,000 hours
- IC rated
- New construction or retrofit applications



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-CDR4-1L-LKFS-WHT (White Baffle)	1,000 lumens 800 lumens 500 lumens	12 9 6	83 lm/W 89 lm/W 83 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
06-CDR4-1L-LKFS-SW (Specular White)	1,000 lumens 800 lumens 500 lumens	12 9 6	83 lm/W 89 lm/W 83 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
06-CDR6-2L-LKFS-WHT	2,000 lumens 1,500 lumens 1,000 lumens	20 15 10	100 lm/W	2700K/3000K/4000K/5000K	8.4"	8.4"	4.2"
06-CDR6-2L-LKFS-SW	1,600 lumens 1,200 lumens 900 lumens	20 15 10	100 lm/W	2700K/3000K/4000K/5000K	8.4"	8.4"	4.2"
06-CDR8-5L-LKFS-WHT	5,000 lumens 4,000 lumens 3,000 lumens	50 40 30	100 lm/W	2700K/3000K/4000K/5000K	10"	10"	4.5"

* Nominal values shown for CCT set at 4000K



2" CANS AND TRIMS

- Dedicated 120ac input
- IC Rated
- Triac dimming with most line voltage dimmers
- CRI>90
- L70 = 50,000 hours



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Available CCT	Length (in)	Width (in)	Height (in)
06-2T-LED-BW-SQ	Square White Baffle Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	2.625"
06-2T-LED-GRW-SQ	Square White Adjustable Gimbal Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	1.75"
06-2T-LED-BW	Round White Baffle Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	2.75"

2" Dedicated LED IC Rated Recessed Cans

New Construction Can	Remodel Can
06-2C-LEDNIC-AT-N	06-2C-LEDRL-IC




3" CANS AND TRIMS

- Dedicated 120ac input
- IC Rated
- Triac dimming with most line voltage dimmers
- CRI>90
- L70 = 50,000 hours
- E26 Edison Adapter for retrofit applications included



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Available CCT	Length (in)	Width (in)	Height (in)
06-3BRKT-BW	Round White Baffle Trim	560 lumens	9	62 lm/W	3000K/4000K	4.375"	4.375"	2.75"

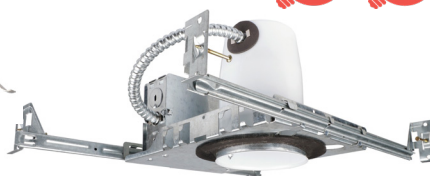

3" Dedicated LED IC Rated Recessed Cans

New Construction Can	Remodel Can
06-3C-LEDNIC-AT-N	06-3C-LEDRL-AT

* Nominal values shown for CCT set at 4000K




4" CANS AND TRIMS

- Standard 120Vac input
- IC Rated
- Triac dimming
- CRI>90
- L70 = 119,000 hours
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-MODR4-7L-KFS	Round White Baffle Trim	700 lumens	10	70 lm/W	27/30/35/40/50 Kelvin	5.1"	5.1"	2.3"

4" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
06-4C-LED-NIC-NND	06-4C-LED-RIC-NND

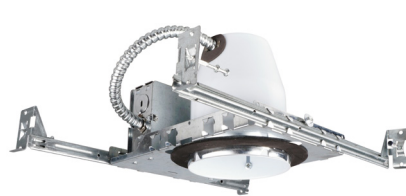

6" CANS AND TRIMS

- Standard 120Vac input
- IC Rated
- Triac dimming
- CRI>90
- L70 = 119,000 hours
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-MODR6-10L-KFS	Round White Baffle Trim	1000 lumens	14	71 lm/W	27/30/35/40/50 Kelvin	7.4"	7.4"	2.4"



6" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
06-6C-LED-NIC-NND	06-6C-LED-RIC-NND




6" Sloped Ceiling IC Rated Recessed Cans

New Construction Can Remodel Can

06-6C-SLPN-ICHT 06-6C-SLPR-ICHT

6" SLOPED INCANDESCENT RECESSED CANS & TRIMS

- Adjustable socket
- For pitched ceilings 10-30 degrees
- Accommodates up to 75W R30/PAR30 Incandescent lamps
- Thermal protection
- IC Rated

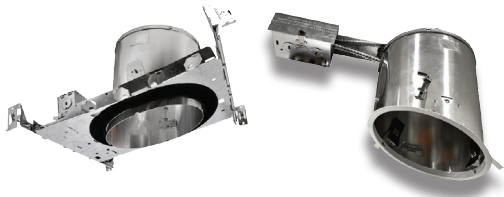

Trim Part	Description	Lamping	Trim Color	Baffle Color
06-6T-SLP-BW	Sloped White Baffle Trim	E26 PAR30/R30 up to 75W	White	White
11-6T-SLP-BB	Sloped Black Baffle Trim	E26 PAR30/R30 up to 75W	White	Black

FLAT PANEL LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 181,000 hours (4-inch); L70 = 173,000 hours (6-inch)



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
10-FPR4-6L-KFS	600 lumens	7	85 lm/W	2700K/3000K/3500/4000K/5000K	4.7"	4.7"	0.8"
10-FPR6-10L-KFS	1,000 lumens	15	66 lm/W	2700K/3000K/3500/4000K/5000K	6.7"	6.7"	0.8"



SURFACE MOUNT DOWNLIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 119,000 hours
- Trim colors available: White, Nickel, Black
- Glass lens



Product Number	Housing Color	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
20-DL9-11L-KFS	White Brushed Nickel Bronze	1,100 lumens	18	61 lm/W	2700K/3000K/3500K/4000K/5000K	9"	9"	2"

* Nominal values shown for CCT set at 4000K



SURFACE MOUNT LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- CRI >80
- Triac Dimming
- Polycarbonate lens
- L70 = 157,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
20-SMR11-KFS	1,000 lumens	14	71 lm/W	2700K/3000K/3500K/4000K5000K	11"	11"	3"
20-SMR14-KFS	1,400 lumens	20	70 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	3"
20-SMS12-KFS	1,000 lumens	14	71 lm/W	2700K/3000K/3500K/4000K5000K	12"	12"	3"
20-SMS14-KFS	1,500 lumens	20	75 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	3"

DOUBLE-RING SURFACE-MOUNT LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- CRI >90
- Triac dimming
- Polystyrene lens
- L70 = 93,000 hours
- Brushed nickel ring color



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
20-DR10-KFS	1,000 lumens	15	67 lm/W	2700K/3000K/3500K/4000K5000K	10"	10"	3"
20-DR14-KFS	1,800 lumens	20	90 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	4"
20-DR18-KFS	2,000 lumens	20	100 lm/W	2700K/3000K/3500K/4000K5000K	18"	18"	4.5"



DISK LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 119,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
06-DK6-10L-KFS	1,000 lumens	15	66 lm/W	2700K/3000K/3500K/4000K/5000K	7.2"	7.2"	1.4"



MULTI-PURPOSE AREA LIGHT PRO

- Field selectable output and color temperature
- Distribution Type III or Type V
- Universal voltage 120-277V or 277-480V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- Optional NEMA photocell
- L70 = 162,000 hours



Mounting	
08-MPAL-ARM	Arm Mount
08-MPAL-ARM-A	Adjustable arm
08-MPAL-SF	Slip-fitter
08-MPAL-TM	Trunnion
08-MPALPRO-Yoke	Yoke

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-MPALPRO-24L-LKFS	26,600 lumens	178	150 lm/W	3000K/4000K/5000K	17"	12"	4"
	22,824 lumens	146	156 lm/W				
	16,173 lumens	100	162 lm/W				
08-MPALPRO-40L-LKFS	44,173 lumens	284	156 lm/w	3000K/4000K/5000K	23.5"	12"	4"
	37,248 lumens	232	160 lm/W				
	32,211 lumens	198	163 lm/W				



Mounting	
08-MPAL-KFS-YKL	Yoke mount (4L & 7L)
08-MPOST17	Line Volate Ground Stake

MULTI-PURPOSE AREA LIGHT

- Field selectable color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 149,000 hours.



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-MPAL-2L-KFS	2,180 lumens	15	145 lm/W	3500K/4000K/5000K	4.3"	1.7"	5.8"
08-MPAL-4L-KFS	4,695 lumens	30	155 lm/w	3500K/4000K/5000K	8.7"	1.9"	9"
08-MPAL-7L-KFS	7,170 lumens	49	147 lm/W	3500K/4000K/5000K	8.7"	1.9"	9"



BOLLARD LIGHTS

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours.
- Black and Bronze housing colors available.



Mounting	
08-BOL-R-MTGKIT	Anchor Bolt for Round Bollard
08-BOL-S-MTGKIT	Anchor Bolt for Round Bollard

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-BOL-R-3L-LKFS	3,244 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	42"
	2,686 lumens	19	145 lm/W				
	1,974 lumens	14	144 lm/W				
08-BOL-S-3L-LKFS	3,047 lumens	23	135 lm/w	3000K/4000K/5000K	6"	6"	42"
	2,450 lumens	18	135 lm/W				
	1,790 lumens	14	130 lm/W				
08-BOL-RD-3L-LKFS	3,249 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	44"
	2,530 lumens	17	145 lm/W				
	1,818 lumens	12	150 lm/W				
08-BOL-RDL-2L-LKFS	1,692 lumens	22	75 lm/W	3000K/4000K/5000K	6"	6"	44"
	1,351 lumens	17	80 lm/W				
	973 lumens	12	80 lm/W				

*Nominal values shown for CCT set at 4000K



TRADITIONAL WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >70
- Glass lens
- L70 = 130,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPT-7L-LKFS	7,290 lumens 5,853 lumens 4,668 lumens	49 38 29	149 lm/W 150 lm/W 151 lm/W	3000K/4000K/5000K	14"	9"	5"
07-WPT-10L-LKFS	10,652 lumens 8,785 lumens 6,741 lumens	74 57 42	144 lm/W 154 lm/W 159 lm/W	3000K/4000K/5000K	14"	9"	5"
07-WPT-15L-LKFS	15,552 lumens 13,506 lumens 10,548 lumens	110 91 69	141 lm/W 149 lm/W 153 lm/W	3000K/4000K/5000K	14"	9"	5"



ADJUSTABLE WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 146,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPA-5L-LKFS	5,084 lumens 3,842 lumens 3,002 lumens	34 25 20	151 lm/W 151 lm/W 154 lm/W	3000K/4000K/5000K	6.5"	4"	8"
07-WPA-10L-LKFS	10,734 lumens 9,032 lumens 7,028 lumens	71 59 45	150 lm/w 153 lm/W 157 lm/W	3000K/4000K/5000K	8.5"	5"	11"



ECONOMY/SMALL WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 156,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPE-3L-LKFS	3,327 lumens 2,709 lumens 2,090 lumens	24 19 14	140 lm/W 143 lm/W 145 lm/W	3000K/4000K/5000K	9"	6"	2.5"



FULL CUT-OFF WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 136,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPFC-8L-LKFS	8,682 lumens	57	152 lm/W	3000K/4000K/5000K	14"	9"	6"
	7,048 lumens	46	156 lm/W				
	5,526 lumens	35	161 lm/W				
07-WPFC-15L-LKFS	16,848 lumens	113	149 lm/w	3000K/4000K/5000K	14"	9"	6"
	13,760 lumens	92	154 lm/W				
	10,987 lumens	71	159 lm/W				



CANOPY LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10Vdc dimming
- Power factor >0.90
- CRI >80
- Optional factory installed microwave and dimming sensors
- L70 = 149,000 hours
- Available in White or Bronze finish



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-CP-10L-LKFS	10,500 lumens	69	150 lm/W	3000K/4000K/5000K	10.5"	9.6"	3.4" (with sensor)
	8,250 lumens	51	160 lm/W				
	6,950 lumens	43	165 lm/W				



DUSK-TO-DAWN LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours
- NEMA photocell standard
- Polycarbonate lens



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
08-DDAL-5L-5K-PC	4,900 lumens	37	133 lm/W	5000K	10"	7"	6"

* Nominal values shown for CCT set at 4000K



LED LIGHTPIPE EXIT COMBO

- Dual 120/277 voltage
- Premium, injection-molded thermoplastic
- 4.8V long life, rechargeable NiCd battery
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Housing Color	Options
02-CLP	Single Double Universal Single/ Double	Red Green	White Black	Self-Diagnostic Custom Wording



EDGE-LIT EXIT SIGN

- Dual 120/277 voltage
- Premium, extruded aluminum housing
- Internal automatic switching to emergency battery mode
- Mounting canopy for top, end or back mounting
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Panel Color	Housing Color	Battery	Options
02-XEU	Single Double	Red Green	Clear Mirror White	White Black Aluminum	AC-Only EM-Battery Back-up	Self-Diagnostic Dual Circuit (120V or 277V) Special Wording Assembled in USA



SLIM PROFILE THERMOPLASTIC EXIT SIGN

- Dual 120/277 voltage
- Red/Green Selectable available
- Engineering grade, 5VA flame retardant Thermoplastic
- Internal automatic switching to emergency battery mode
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	LED/Letter Color	Housing Color	Battery	Options	Housing Style
02-EZR	Red Green Red/Green Selectable	White Black	AC-Only EM-Battery Back-up	Self-Diagnostic Dual Circuit Custom Wording Assembled in USA	SL- Low Profile

TWO-HEAD THERMOPLASTIC COMBO UNIT

- Standard 120Vac input
- Dual 120/277 voltage
- 1.5-watt (3 LEDs x 0.50 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	LED/Letter Color	Housing Color	Options
02-CEM	Universal Single/Double	Red Green	White Black	Remote Capacity Self-Diagnostic Assembled in USA



REDUCED PROFILE ADJUSTABLE TWO-HEAD EMERGENCY UNIT

- Dual 120/277 voltage
- 1.5-watt (3 LEDs x 0.50 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Options
02-EM	White Black	Self-Diagnostic Remote Capacity



DECORATIVE OUTDOOR AC EMERGENCY UNIT

- 4.8V long life, rechargeable NiCad Battery
- Automatic Emergency on switch
- 90 minutes illumination
- Self-Diagnostic monthly, bi-annual and annual testing
- Photocell standard
- Optional internal heater for extreme cold weather
- CEC Title 20 certified optional
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Voltage	Wattage	Output (Lumens)
02-ETD-ACEM	White Black Dark Bronze Nickel	Universal 120- 277V	12W	1,286 (AC mode) 350 (DC mode)



MICRO/MINI/LARGE INVERTER EMERGENCY POWER SYSTEM

Electrical inverter systems for powering up to 1150W of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz. sinusoidal emergency power to loads.



Product Number	Capacity	Mounting	Options
23-MPS	20 Watts 32 Watts 35 Watts 55 Watts	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel
23-PINV	55 Watts/125VA 110 Watts/125VA 110Watts/250VA 220Watts/250VA	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel 4C- 4-output Circuit Switching AO-Adjustable Output/Dimmer Bypass
23-LPS	375 Watts 600 Watts 750 Watts 950 Watts 1150 Watts	Surface	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel 4C- 4-output Circuit Switching 4AO-Adjustable Output/Dimmer Bypass Input Circuit Breaker Output Circuit Breaker




EMERGENCY DRIVER FOR LED LAMPS

Our dependable emergency driver provides regulated power to LED lamps during a power outage. Our emergency driver has versatile mounting options: inside, on-top or remote mount. Includes a push to test indicator standard.



Product Number	Output Voltage	Output Wattage
03-LEDEM-BP/DM-20W-E	180VDC	20 Watts

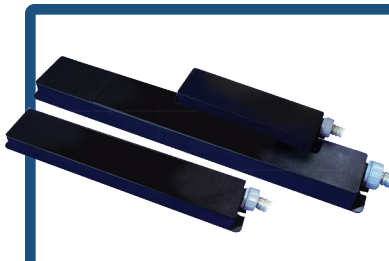

MICRO/MINI/LARGE INVERTER EMERGENCY POWER SYSTEM

Electrical inverter systems for powering up to 1150W of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz. sinusoidal emergency power to loads.



Product Number	Current (mA)	Output Voltage (VDC)	Output Wattage (W)	Lumens (Lm)
03-LEDEM-CP-1200	390-156	20-50	7.8	1200
03-LEDEM-CP-2400	850-340	20-50	17.0	2400

Product Number	Current (mA)	Output Voltage (VDC)	Output Wattage (W)	Options
03-BLEM-CP-5	250-100	20-50	5	-C = Provided with 2' flex conduit on each end
03-BLEM-CP-10	535-214	20-50	10.7	
03-BLEM-CP-13	685-274	20-50	13.7	



MICRO-WAVE OR DAYLIGHT HARVESTING / OCCUPANCY SENSOR

20-HD406VRH-D

- Multi-volt: 120-277V
- Rated up to 3A @120V
- Operating Temperature of -35°C to 60°C
- Mounts up to 49ft
- Requires remote to adjust factory settings (HD03R)



CEILING MOUNTED PIR OCC SENSOR

11-CMS-YM2301

- Replaces a standard light or fan switch
- Time-delay adjustment from 10 seconds up to 30 minutes
- Sensitivity adjustment
- Light level sensing adjustment sets brightness value upon activation



360° HIGH BAY OCC SENSOR

20-FL-OSFHU-RG

- Passive Infrared Technology:
- Turn lights ON in response to the heat generated energy
- Mounts directly onto a luminaire
- Operational Mode: Auto ON, Auto OFF
- Time Delay: Adjustable (15 seconds up to 30 minutes)
- Coverage Range: High Bay mounting heights up to 25' mounting / 360° field
- 120/277VAC, 60Hz Voltage
- Load Requirements: 800VA at 120VAC



RF CONTROL

11-PPA401S

- Multi-volt: 120-277V
- 0-10V Dimming
- Operating Temperature of 0° - 40°C
- Rated up to 1200W
- Remote Required



BLUETOOTH CONTROL

11-PPA102S

- Multi-volt: 120-277V
- 0-10V Dimming
- Rated up to 13.1A
- Bluetooth Mesh
- App controlled



EXTERNAL SCREW-IN PIR SENSOR

20-HD07VR-PH-1

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -20°C to 60°C
- Mounts up to 39ft
- Requires remote to adjust factory settings (HD05R)



3-PIN NEMA PHOTOCELL

07-JL-205C23-IP65

- Multi-volt: 120-277V
- Turns on at 6 lux, turns off at 50 lux
- Operating Temperature of -40°C to 70°C
- Rated up to 1800W
- Preset 5-30 second time delay



EXTERNAL SCREW-IN MICROWAVE SENSOR

20-HD07VR-MH-B-1

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -20°C to 60°C
- Mounts up to 49ft
- Requires remote to adjust factory settings (HD05R)



480V NEMA PHOTOCELL

07-26WA86

- Input Voltage of 480V
- Turns on at 10-20 lux, off at 30-60 lux
- Operating Temperature of -40°C to 70°C
- Rated up to 1800W



PHOTOCELLS

07-JL-403C 07-JL-404C

- Multi-volt: 120-277V
- Turns on at 10-20 lux, turns off at 30-80 lux
- Operating Temperatures of -40°C - 70°C
- Rated for up to 5A
- Preset 3-10 second time delay



ACCESSORIES

180° PIR WALLBOX VACANCY & OCC SENSOR

11-SOVS-WH-MV

- PIR detects motion from heat-emitting source
- Replaces a standard light or fan single-pole switch
- Automatic ON/OFF and manual ON / Automatic OFF operation
- Neutral wire required
- LED Indicates motion was sensed
- Adjustable time delay from 15 seconds - 30 minutes
- Multi-volt



DIMMERS

11-DWS-010V-T 11-DWS-010V-D

- Multi-volt: 120-277V
- 0-10V Dimming
- Rated up to 600W
- Compatible with LED/CFL/Incandescent Lamps and Luminaires
- Single pole and 3 Way applications



Product Number

GFCI


11-GFCI-ST-20TR-WH-K	20 amp Self Testing Tamper
11-GFCI-ST-20TRWR-WH-K	20 amp Self Testing Tamper/WR
11-GFCI-ST-15TR-WH-K	15 amp Self Testing Tamper
11-GFCI-ST-15TRWR-WH-K	15 amp Self Testing Tamper/WR



Product Number

Switches

11-DS115	Single Pole Decora Switch 15 Amp
11-DS3115	3-way Decora Switch 15 Amp
11-DS415	4-way Decora Switch 15 Amp
11-TS115	Single Pole Toggle Switch 15 Amp
11-TS215	2-Way Toggle Switch Side 15 Amp
11-TS315	Duplex Horizontal Toggle Switch

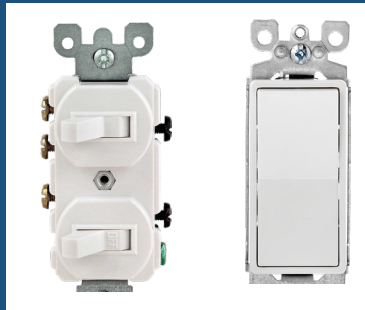

Product Number

Receptacles

11-115R-S-WH	15 amp Duplex Single Recep.
11-120R-S-WH	20 amp Duplex Single Recep.
11-15R-D-WH	15 amp Decora Recep.
11-15R-D-TR-WH	15 amp Decora Recep. Tamper
11-15R-S-WH	15 amp Duplex Recep.
11-15R-S-TR-WH	15 amp Duplex Recep. Tamper
11-20R-D-WH	20 amp Indust Decora Recep.
11-20R-D-WH-TR	20 amp Indust Decora Recep. Tamper
11-20R-S-WH	20 amp COM Stand Duplex Recep.
11-DD30A-4S	Dryer/Range Receptacle, 30A
11-DD50A-4S	Dryer/Range Receptacle, 50A
11-TR20-DC	20 amp Tamper Decora Recep.
11-TR20-SC	20 amp Tamper Duplex Recep.
11-USB-15-TR	15 amp Receptacle USB Tamper
11-USB-20R-TR	20 amp Receptacle USB Tamper



ACCESSORIES

Product Number	Face Plates
11-1T-WH	1 Gang Phone Jack
11-1J-WH	1 Gang Coaxial Jack
11-1RP-WH	1 Gang Single Recep. Plate
11-BP1-WH	1 Gang Blank Plate
11-BP2-WH	2 Gang Blank Plate
11-DDR-PL2-SS	Dryer Stainless Steel Plate
11-DP1-WH	1 Gang Decorative Plate
11-DP2-WH	2 Gang Decorative Plate
11-DP3-WH	3 Gang Decorative plate
11-DP4-WH	4 Gang Decorative Plate
11-DRP1-WH	1 Gang Duplex Recep. Plate
11-DRP2-WH	2 Gang Duplex Recep. Plate
11-TP1-WH	1 Gang Toggle Plate
11-TP2-WH	2 Gang Toggle Plate
11-TP3-WH	3 Gang Toggle Plate

ASK ABOUT OUR WHIPS, CORDS AND OTHER ACCESSORIES FOR YOUR PROJECT!

WIRE CONNECTORS

Broad offering of popular, standard types including Barrel, Winged and Winged Easy-turn and Push-in connectors:

Barrel		Winged/Winged Easy		Push-In	
Product Number	Color	Product Number	Color	Product Number	Ports/Color
16-P6001	Red	16-P1301	Red	16-PC25201	2-port Red
16-P2001	Baby Blue	16-N1001	Yellow (Easy)	16-PC25301	3-port Orange
16-P4001	Yellow	16-P1101	Yellow	16-PC25401	4-port Yellow
16-P3001	Orange	16-N2001	Red (Easy)		
		16-P1501	Big Grey		
		16-P1701	Big Blue		
		16-P9901	Green		
		16-P1201	Tan		

Product Number
06-6T-O-RING

GOOF RINGS

- 50 pack
- High quality white plastic goof rings for can lights and down lights
- Outside diameter: Approx. 7 7/8" or 20 cm
- Inside diameter: Approx. 5 7/8" or 15 cm
- Replaces the ring of a 6 inch baffle trim can light

CABLE TIES

- 100 Pieces per bag
- Operating Temp: -4F ~ 185F
- 50lb tensile strength

Product Number	Description	Color	Length (In.)	Width (In.)
13-850-SMN	Screw Mount Plenum Cable Tie	Natural	8	0.19
13-850-N100	UV Rated Plenum Cable Ties	Natural	8	0.19
13-1150-N100	UV Rated Plenum Cable Ties	Natural	11	0.19
13-1450-N100	UV Rated Plenum Cable Ties	Natural	14.5	0.19
13-850-B100	UV Rated Plenum Cable Ties	Black	8	0.19
13-1150-B100	UV Rated Plenum Cable Ties	Black	11	0.19
13-1450-B100	UV Rated Plenum Cable Ties	Black	14.5	0.19

Your #1 Choice!

- » Wholesale Prices
- » Rebate Qualified Products
- » FAST Shipping
- » Full-time Dedicated Reps
- » Millions in inventory

High Bays • LED Cans & Trims • Vapor Tight & Strips •
Outdoor Area/Flood • Flat Panels

High Quality, FULLY stocked products in U.S. Inventory • Orders filled in days not weeks

Contractor Lighting & Supply
1225 Etna Pkwy
Pataskala, OH 43062

