

PROJECT
TYPE
CATALOG #

12-L8L

4-ft BYPASS ONLY CCT SELECTABLE REPLACEMENT LAMPS (T8)

HOUSING

- Glass tubes with PBT end caps

ELECTRICAL

- Universal 120-277V AC voltage (50-60Hz)
- Base Type: G13
- Dimming not recommended
- Power factor > 0.90.
- Surge protection (1kV)
- Total harmonic distortion < 20%.

OPTICAL SYSTEM

- Field selectable 3000k (warm white) and 3500k (warm/neutral white), 4000k (neutral white), 5000K (cool white), and 6000k (daylight) color temperatures.
- Color rendering index > 80.
- LEDs provide 54,000 hours of operation with at least 70% of initial lumen output (L70)
- 12-L8L1-BPMFH-G2-17W-ABTSE2200-4C provides 2100 nominal lumens from 17 nominal watts

MOUNTING



- Easy installation in new or retrofit installation

CODE COMPLIANCE

- cULus listed for damp locations
- Input transient surge protection = 1kV
- Complies with FCC Part 15, classB.

WARRANTY

- 5-year warranty on all electronics and housing.

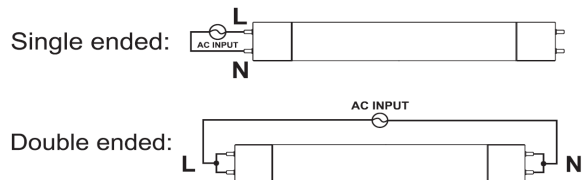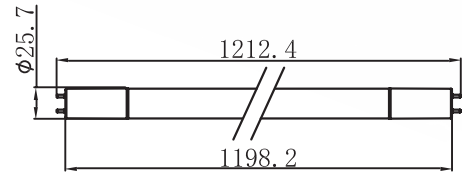

PRODUCT PARAMETERS

SERIES	NOMINAL LUMEN OUTPUT	KELVIN (Selectable)
12-L*L1-BPMFH-G2-17W-ABTSE2200-4C	2100	3000k/35000K/4000K/5000k/6000