

HBSD

480V-277V

Step-Down Transformer

Project:	
Type:	
Catalog #:	

SPECIFICATIONS

Step-Down Transformer

HOUSING

- Aluminum alloy (painted white).

ELECTRICAL

- Operating temperature: max ambient = 105°C (221°F).
- Operates at input voltage of either 347V or 480V ($\pm 10\%$ voltage variations) at 60Hz.
- Step-down voltage:
 - 480V to 208V (325VA)
 - 347V to 150V (240VA)
 - 277V to 120V (185VA)
- Non-isolated autotransformer.
- Thermally protected.
- Surge protection = 0.5kV.

MOUNTING


- Suspension from eyebolt (included) is standard.

CODE COMPLIANCE


- cETLus listed for damp locations.
- Complies with UL 5085-3 for field installation.
- Complies with FCC Part 15, class B.
- IP65 rated for ingress protection.

WARRANTY

- 5-year warranty on all electronics and housing.

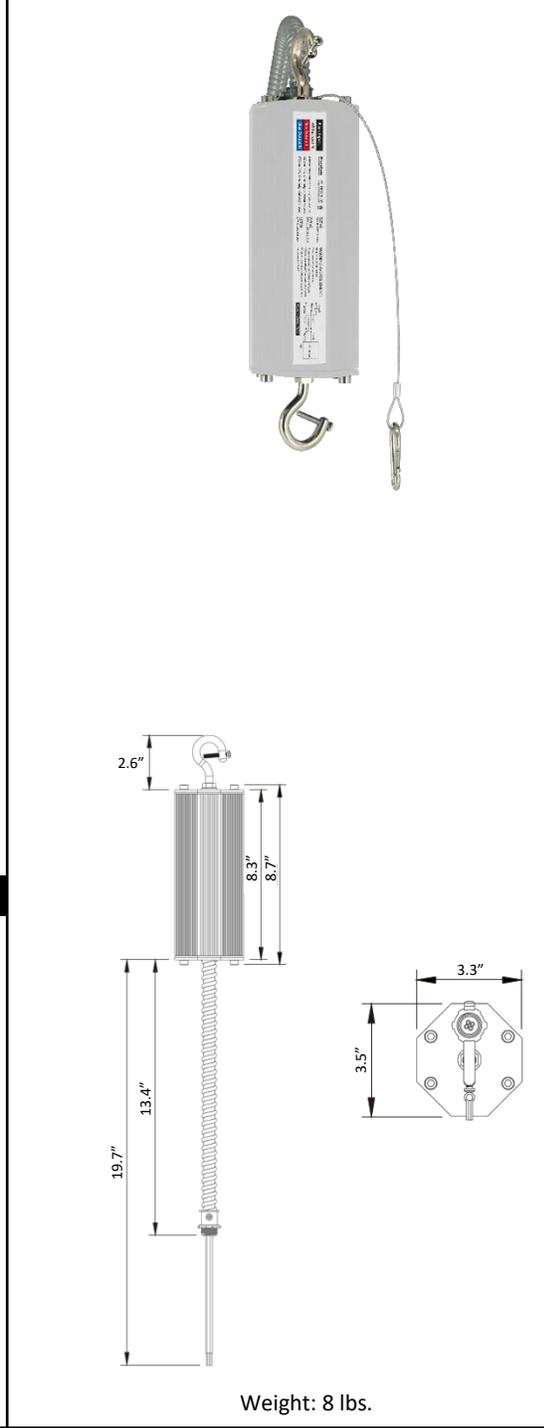

WIRING DIAGRAM

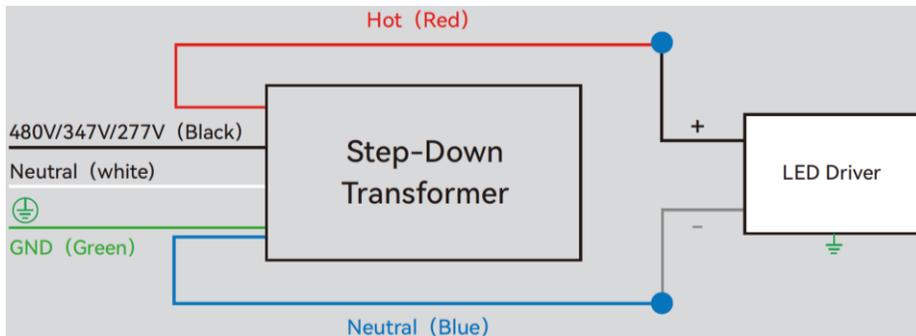

ORDERING INFORMATION

Example: HBSD-325W-480-277

Series

HBSD-325W-480-277