

PROJECT
TYPE
CATALOG #

11-GFCI

SELF TESTED GFCI RECEPTACLES

HOUSING

- White wall plate, white front receptacle cover and gray back enclosure.

FEATURES

- Terminals allow for easy wiring options, back and side wire capable.
- External back wire clamps provide visual indication of proper wire seating.
- Self-Test feature ensures continuous protection.
- Withstands high torque and resists wire pullout.
- Accepted terminal wire size of 12 gauge to 14 gauge.
- Operating temperature of -13°C to 66°C.
- Operating Humidity of 30 to 95 percent.
- NEMA 5-15 receptacle.
- Rated V-2 per UL 94 regarding flammability.
- Trip threshold meets or exceeds UL requirements for tripping time.
- Advanced electronics design provides superior resistance to electrical surges and over-voltages.
- Wall plated included.

APPLICATIONS

- Self-Test GFCI Outlet with Indicator LED Light, Wall plate and Screws Included, it offers ground fault protection in bathrooms, kitchens and any area of the home. It is designed to meet the latest UL standard. It can also prevent some fires, like when a live wire touches a metal conduit.
- Automatically tests the GFCI every time the reset button is pushed in, the GFCI will not reset if its circuit is not functioning properly. Indicator light, wall plate and screws are included. GFCIs should be tested monthly to ensure they are providing protection, press the test button, then reset button, if the indicator light turns red, it must be replaced. Cannot be reset if miss-wired. Back wire featured for easy installation. End of life function, automatic end of life detection and warn action.

11-GPG915L-TR/WTR



With Wall Plate

11-GPG920L-TR/WTR





With Wall Plate

PRODUCT PARAMETERS

MODELS	DESCRIPTION	MAXIMUM AMPS	INPUT VOLTAGE
11-GPG915L-TR	15 amp Tamper Resistant GFCI with Auto-Monitoring Function	15	120V, 60Hz
11-GPG915L-WTR	15 amp Weather & Tamper Resistant GFCI with Auto-Monitoring Function	15	120V, 60Hz
11-GPG920L-TR	20 amp Tamper Resistant GFCI with Auto-Monitoring Function	20	120V, 60Hz
11-GPG920L-WTR	20 amp Weather & Tamper Resistant GFCI with Auto-Monitoring Function	20	120V, 60Hz

INSTRUCTIONS

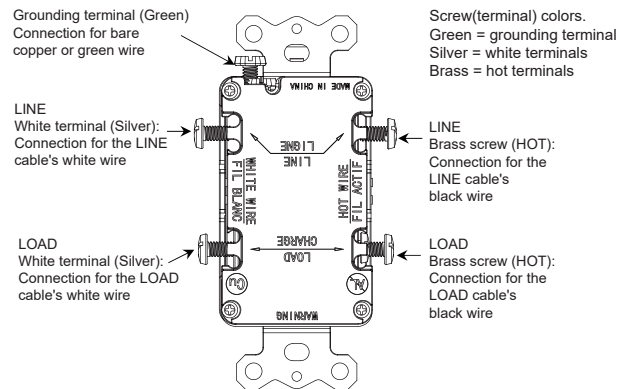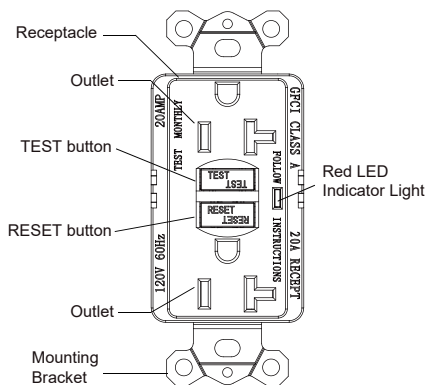

Tightening torque: 14 in-lbf (1.6N.m)