

PROJECT
TYPE
CATALOG #


11-RECEPTACLES

SELF TESTED RECEPTACLES


FEATURES

- Terminals allow for easy wiring options, back and side wire capable.
- External back wire clamps provide visual indication of proper wire seating.
- Self-Test feature ensures continuous protection.
- Withstands high torque and resists wire pullout.
- Accepted terminal wire size of 12 gauge to 14 gauge.
- Operating temperature of -40°C to 75°C.


Dryer/Range Receptacles

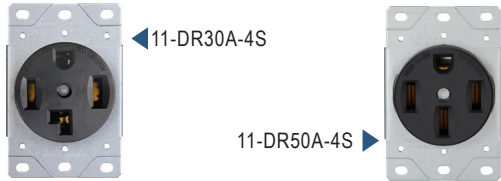


USB Charger Receptacles

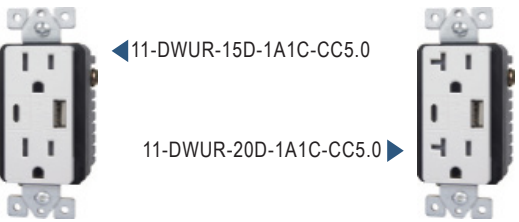


Standard Receptacles

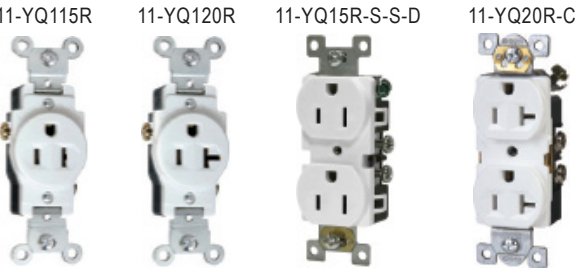

Decorator Receptacles

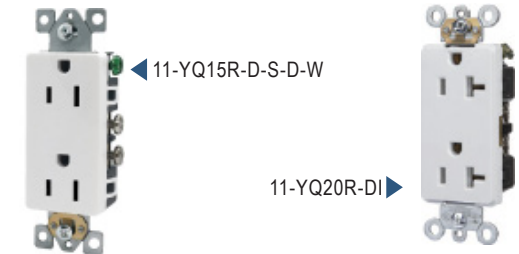

Decorator Tamper Resistant Receptacles

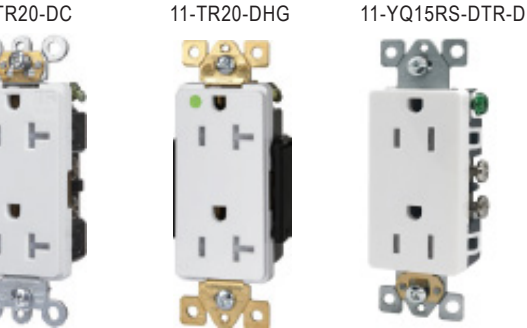

MODELS	DESCRIPTION
11-DR30A-4S-W	Dryer/range, 120V or 250V - 30A, 3 pole 4 wire grounding, for use with copper or aluminum wire, nema 14-30R, white
11-DR50A-4S-W	Dryer/range, 120V or 250V - 50A, 3 pole 4 wire grounding, for use with copper or aluminum wire, nema 14-50R, white
11-DWUR-15D-1A1C-CC5.0-W	Duplex, tamper resistant, 125V 60Hz - 15A, type a & type C USB charger, output = 5V/5A, white
11-DWUR-20D-1A1C-CC5.0-W	Duplex, tamper resistant, 125V 60Hz - 20A, type a & type C USB charger, output = 5V/5A, white
11-YQ115R-W	Commercial grade, single, 125V - 15A, white
11-YQ120R-W	Commercial grade, single, 125V - 20A, white
11-YQ15R-S-S-D-W	Residential grade, duplex, 125V - 15A, self grounding, white
11-YQ20R-C-W	Commercial grade, duplex, 125V - 20A, self grounding, white
11-YQ15R-D-S-D-W	Residential grade, duplex, decorator, 125V - 15A, self grounding, white
11-YQ20R-DI-W	Industrial grade, duplex, decorator, 125V - 20A, self grounding, white
11-YQ15RS-STR-D-W	Residential grade, duplex, tamper resistant, 125V - 15A, self grounding, white
11-TR20-SHG-W	Hospital grade, duplex, tamper resistant, 125V - 20A, self grounding, white
11-TR20-SC-W	Commercial grade, duplex, tamper resistant, 125V - 20A, self grounding, white
11-TR20-DC-W	Commercial grade, duplex, tamper resistant, decorator, 125V - 20A, self grounding, white
11-TR20-DHG-W	Hospital grade, duplex, tamper resistant, decorator, 125V - 20A, self grounding, white
11-YQ15RS-DTR-D-W	Residential grade, duplex, tamper resistant, decorator, 125V - 15A, self grounding, white

Standard Tamper Resistant Receptacles

