

PROJECT
TYPE
CATALOG #

02-CEU

LOW PROFILE ALL LED EXIT & EMERGENCY COMBO

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTICAL SYSTEM

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

MOUNTING

- EZ-snap thermoplastic mounting canopy included-provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

OPTIONS


- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

CODE COMPLIANCE

- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

WARRANTY

- 5-year warranty on all electronics and housing.
- Battery prorated for 5 years

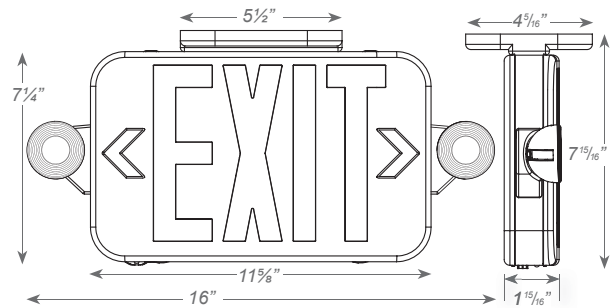

STANDARD



OPTIONAL



* HL and RC options cannot be combined. 0.5W of remote capacity available standard with HL option.

** Not available with RG units

***L₇₀ hours are IES TM-21-11 calculated hours

PRODUCT PARAMETERS

SERIES	No. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
02-CEU	3 = Universal Single/Double Face	R = Red G = Green RG = Red/Green	B = Black W = White	RC = Remote Capacity* HL = High Lumen LED* SDT = Self Diagnostics** SPV 120/230 Volt 50/60Hz**

