




# 2026 SUPPLY CATALOG

Lighting & Electrical

**CALL US**  
877.664.5483

We're experienced lighting professionals that can't wait to talk lighting with you.

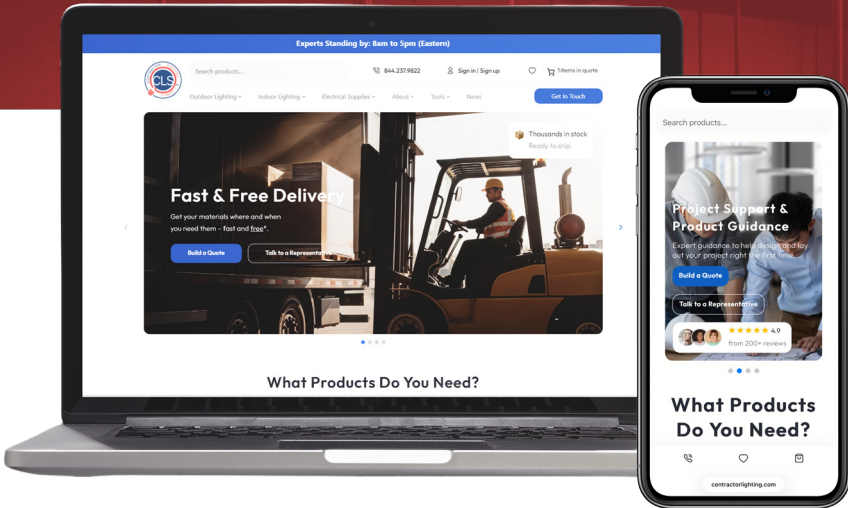


# VISIT US ONLINE


 [www.contractorlighting.com](http://www.contractorlighting.com)

- Build a quote right on the site, and get pricing directly from your account manager.
- Get product specs at your finger tips- even on your mobile device!
- Get access to the AGi32 Lighting Layout tool.
- Get access to Energy rebate data and build your project ROI to present to your stake-holders.

Indoor Lighting Design Tools

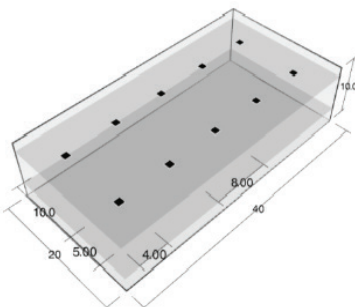

Outdoor Lighting Design Tools

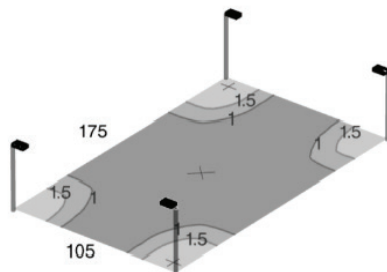

# TABLE OF CONTENTS

## 4 OUTDOOR

---

AREA LIGHTS  
FLOOD LIGHTS  
LIGHT POLES  
BOLLARDS

CANOPY LIGHTS  
DUSK-TO-DAWN  
WALL PACKS  
VAPOR TIGHTS

## 16 INDOOR

---

HIGH BAYS  
STRIP LIGHTS  
WRAP LIGHTS  
STAIRWELLS  
DISK LIGHTS

LED REPLACEMENT TUBES  
UNDERCABINET LIGHTS  
CEILING PANEL LIGHTS  
RECESSED DOWNLIGHTS  
FLAT PANELS  
RECESSED CANS & TRIMS

## 32 LIFE SAFETY

---

EXIT SIGNS  
EMERGENCY LIGHTING  
EMERGENCY COMBOS  
POWER SYSTEMS

## 36 ACCESSORIES

---

SENSORS  
DIMMERS  
SWITCHES  
RECEPTACLES

WIRE CONNECTORS  
GOOF RINGS  
CABLE TIES

## MULTI-PURPOSE AREA LUMINAIRE



- Field selectable output and color temperature
- Distribution Type III or Type V
- Universal voltage 120-277V or 277-480V (-UNC)
- 0-10v dimming
- Power factor >0.90
- CRI >70
- Screw in sensor ready. Sensor and remote control sold separately
- NEMA Photocell receptacle available (-PR) Photocell sold separately
- L70 = 167,000 hours



Mounting	
08-MPALSRSF-ARM	Slip Fitter & Arm Mount Combo
08-MPALSRSF-ARM-A	Adjustable Arm Mount
08-MPALSRSF-SF	Slip Fitter
08-MPALSRSF-YOKE-S	Yoke for 08-MPALSRSF-241812L
08-MPALSRSF-YOKE-L	Yoke for 08-MPALSRSF-403224L
08-MPALSRSF-TM	Trunnion Mount
08-MPALSRSF-GLARESHIELD-24L	Glare Shield
08-MPALSRSF-GLARESHIELD-40L	Glare Shield



Product Number	Selectable Lumen Output**	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-MPALSRSF-241812L-3CCT	12,952 lumens	70	186 lm/W	3000K/4000K/5000K	16.63"	8.66"	2.07"
	19,335 lumens	108	179 lm/W				
	24,994 lumens	145	172 lm/W				
08-MPALSRSF-403224L-3CCT	24,576 lumens	129	190 lm/w	3000K/4000K/5000K	20.05"	11.89"	2.07"
	33,019 lumens	178	186 lm/W				
	40,847 lumens	226	181 lm/W				
08-MPALSRSF-241812L-3CCT-UNC	13,183 lumens	72	183 lm/W	3000K/4000K/5000K	16.63"	8.66"	2.07"
	19,465 lumens	109	178 lm/W				
	25,184 lumens	147	172 lm/W				
08-MPALSRSF-403224L-3CCT-UNC	24,602 lumens	129	190 lm/W	3000K/4000K/5000K	20.05"	11.89"	2.07"
	33,239 lumens	177	188 lm/W				
	41,303 lumens	225	184 lm/W				

## MULTI-PURPOSE AREA LUMINAIRE

- Field selectable color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 167,000 hours



Mounting	
08-ZZ-MPAL-MT-ADPT*	Mount Adapter for Arm and Slip Fitter
08-MPAL-YK-16129L	Yoke mount, Bronze
08-MPALDSR-ARM	Arm Mount
08-MPALDSR-SF	Slip Fitter



\*Adapter required when ordering the Arm Mount or Slip Fitter brackets.

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-MPAL-863L-3CCT	3,430 lumens	22	159 lm/W	3500K/4000K/5000K	9.02"	8.70"	2.17"
	5,672 lumens	35	160 lm/W				
	7,589 lumens	48	158 lm/W				
08-MPAL-16129L-3CCT	8,782 lumens	51	172 lm/W	3500K/4000K/5000K	10.16"	10.12"	2.2"
	11,738 lumens	70	168 lm/W				
	15,775 lumens	97	162 lm/W				

**DISTRIBUTION SELECTABLE MULTI-PURPOSE AREA LUMINAIRE**

- Field selectable output and color temperature
- Selectable Distribution Type III, Type IV or Type V
- Screw in sensor ready. Sensor and remote control sold separately
- NEMA Photocell receptacle available (-PR) Photocell sold separately
- Universal voltage 120-277V
- Available in 277-480V (-UNC)
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 167,000 hours



Mounting	
08-MPALDSR-ARM-A	Adjustable Arm Mount
08-MPALDSR-ARM	Arm Mount
08-MPALDSR-SF	Slip Fitter
08-MPALDSR-YOKE-S	Yoke for 08-MPALDSR-242115L
08-MPALDSR-YOKE-L	Yoke for 08-MPALDSR-403530L
08-MPALDSR-TM	Trunnion Mount
08-MPALDSR-GLARESHIELD-24L	Glare Shield
08-MPALDSR-GLARESHIELD-40L	Glare Shield



Product Number	Selectable Lumen Output**	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)	Selectable Distribution
08-MPALDSR-242115L-3CCT	16,398 lumens 22,868 lumens 25,866 lumens	107 156 182	153 lm/W 146 lm/W 142 lm/W	3000K/4000K/5000K	18.52"	12.22"	2.8"	Type III/IV/V
08-MPALDSR-403530L-3CCT	30,523 lumens 35,499 lumens 40,931 lumens	202 243 293	151 lm/W 146 lm/W 140 lm/W	3000K/4000K/5000K	21.26"	13.68"	2.83"	Type III/IV/V
08-MPALDSR-242115L-3CCT-UNC	17,466 lumens 24,101 lumens 27,064 lumens	110 158 182	159 lm/W 153 lm/W 148 lm/W	3000K/4000K/5000K	18.52"	12.22"	2.8"	Type III/IV/V
08-MPALDSR-403530L-3CCT-UNC	31,305 lumens 36,120 lumens 41,736 lumens	201 241 289	156 lm/W 150 lm/W 145 lm/W	3000K/4000K/5000K	21.26"	13.68"	2.83"	Type III/IV/V

**ASK ABOUT LIGHT POLES**

We supply a range of durable poles to enhance any outdoor space!

**Up to 30 ft**  
**Square and round styles**  
**Steel, Aluminum, and Direct Burial**



**LIGHT POLE BRACKETS**

Call a representative for more information!

- Bullhorns**
- Spoke Brackets**
- Wall Mount Brackets**

- Low Profile Bullhorns**
- Pole Side Brackets**
- Cantilever Brackets**

### MULTI-PURPOSE AREA LIGHT

- Field selectable color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 149,000 hours



Mounting	
08-MPAL-KFS-YKL	Yoke mount (4L & 7L)
08-MPOST17	Line Voltage Ground Stake
07-CM-R	Round Canopy Mounting Plate



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-MPAL-2L-KFS	2,180 lumens	15	145 lm/W	3500K/4000K/5000K	4.3"	1.7"	5.8"
08-MPAL-4L-KFS	4,695 lumens	30	156 lm/w	3500K/4000K/5000K	8.7"	1.9"	9"
08-MPAL-7L-KFS	7,170 lumens	49	147 lm/W	3500K/4000K/5000K	8.7"	1.9"	9"
08-MPAL-863L-3CCT	Selectable 3,430 lumens 5,672 lumens 7,589 lumens	22 35 48	159 lm/W 160 lm/W 158 lm/W	3500K/4000K/5000K	9.02"	8.70"	2.17"

### BULLET FLOOD LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >70
- L70 = 151,000 hours
- Built in photocell
- Beam angle 3H3V distribution



Mounting	
08-MPOST17	Line Voltage Ground Stake
07-CM-R	Round Canopy Mounting Plate



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-BF-453730L-3CCT	3,187 lumens 4,008 lumens 5,064 lumens	20 25 33	161 lm/W 158 lm/W 152 lm/W	3000K/4000K/5000K	6.4"	5.5"	8.9"

### HIGH LUMEN BULLET FLOOD LIGHT

- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >70
- L70 = 83,000 hours
- Beam angle 2H2V distribution



Mounting	
08-MPOST17	Line Voltage Ground Stake
07-CM-R	Round Canopy Mounting Plate



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
08-BFHL-9L-5K	9096 lumens	82	110.5 lm/W	5000K	8.5"	6"	9.3"

## BOLLARD LIGHTS - FLAT TOP

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours
- Available in Black and Bronze



Mounting	
08-BOL-R-MTGKIT	Anchor Bolt for Round Bollard
08-BOL-S-MTGKIT	Anchor Bolt for Square Bollard



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-BOL-R-3L-LKFS	3,244 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	42"
	2,686 lumens	19	145 lm/W				
	1,974 lumens	14	144 lm/W				
08-BOL-S-3L-LKFS	3,047 lumens	23	135 lm/w	3000K/4000K/5000K	6"	6"	42"
	2,450 lumens	18	135 lm/W				
	1,790 lumens	14	130 lm/W				

## UFO HEAD BOLLARD LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >70
- L70 = 192,000 hours
- Available in Black and Bronze



Mounting	
08-BOL-R-MTGKIT	Anchor Bolt for Round Bollard



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Base Width (in)	Head Width (in)	Height (in)
08-BOL-UFO-302317L-3CCT	3,019 lumens	23	131 lm/W	3000K/4000K/5000K	6"	10"	42"
	2,385 lumens	18	134 lm/W				
	1,770 lumens	13	135 lm/W				

## BOLLARD LIGHTS - DOME TOP

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours
- Available in Black and Bronze



Mounting	
08-BOL-R-MTGKIT	Anchor Bolt for Round Bollard



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-BOL-RD-3L-LKFS	3,249 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	44"
	2,530 lumens	17	145 lm/W				
	1,818 lumens	12	150 lm/W				
08-BOL-RDL-2L-LKFS	1,692 lumens	22	75 lm/W	3000K/4000K/5000K	6"	6"	44"
	1,351 lumens	17	80 lm/W				
	973 lumens	12	80 lm/W				

**SLIM BOLLARDS**

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 167,000 hours
- Available in Black and Bronze
- Available in 32" or 42" heights



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-BOLS-R32 (R42)-342921L-5CCT	3,447 lumens 2,909 lumens 2,074 lumens	23 19 14	149 lm/W 150 lm/W 150 lm/W	2700K/3000K/3500K/ 4000K/5000K	4.53"	4.53"	32" or 42"
08-BOLS-S32 (S42)-332821L-5CCT	3,269 lumens 2,760 lumens 2,088 lumens	23 19 14	144 lm/W 146 lm/W 146 lm/W	2700K/3000K/3500K/ 4000K/5000K	4.53"	4.53"	32" or 42"

**LED POST TOP LIGHT**

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >70
- Screw in sensor ready
- Polycarbonate lens
- Built in photocell
- L70 = 167,000 hours



Mounting	
08-RALSR-Y-ARM-T5	Y Arm Mount for T5
08-RALSR-WALL-MOUNT-T3&T5	Wall Mount for T3 and T5
08-RALSR-SINGLE-ARM-T3&T5	Single Arm Mount for T3 and T5



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
08-RALSR-20161310L-3CCT-T3	22,122 lumens 17,768 lumens 14,831 lumens 11,455 lumens	123 96 79 60	180 lm/W 185 lm/W 188 lm/W 192 lm/W	3000K/4000K/5000K	16.06"	16.06"	2.8"
08-RALSR-20161310L-3CCT-T5	19,996 lumens 15,911 lumens 13,204 lumens 9,266 lumens	122 95 77 53	164 lm/W 168 lm/W 171 lm/W 175 lm/W	3000K/4000K/5000K	16.06"	16.06"	2.8"

## CANOPY LIGHT

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately.
- Universal voltage 120-277V
- 0-10Vdc dimming
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 167,000 hours
- Available in Bronze or White



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-CPSR-1210863L-3CCT	3,393 lumens 6,701 lumens 8,808 lumens 10,143 lumens 11,715 lumens	20 39 52 60 70	170 lm/W 172 lm/W 170 lm/W 168 lm/W 167 lm/W	3000K/4000K/5000K	10"	10"	3.18"

## HIGH LUMEN CANOPY LIGHT

- 5000K (cool white) color temperatures
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 173,000 hours
- Polycarbonate lens



Product Number	Selectable Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
07-CPHL-272219L-5K	19,553 lumens 22,366 lumens 27,385 lumens	120 139 177	163 lm/W 160 lm/W 154 lm/W	5000K	15"	15"	3.26"

## ROUND CANOPY LIGHT

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- 0-10Vdc dimming
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 167,000 hours
- Available in Bronze or White



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-CPSR-1110863L-3CCT	3,221 lumens 6,594 lumens 8,862 lumens 10,134 lumens 11,682 lumens	19 39 53 61 71	167 lm/W 170 lm/W 168 lm/W 166 lm/W 163 lm/W	3000K/4000K/5000K	10.01"	10.01"	3.06" (with sensor)

### RECESSED CANOPY LIGHT

- Universal voltage 120-277V
- 0-10Vdc dimming
- Power factor >0.90
- CRI >80
- L70 = 167,000 hours



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
07-CP-11L-5K	10,400 lumens	78	132 lm/W	5000K	16.8"	16.8"	3"

### TRADITIONAL WALL PACK SENSOR READY

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Prismatic Glass lens
- Built-in photocell standard
- L70 = 167,000 hours
- Emergency Driver Installed- EM8



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPTSR-8654L-3CCT	3,863 lumens 4,786 lumens 5,910 lumens 7,817 lumens	25 31 38 50	156 lm/W 156 lm/W 157 lm/W 155 lm/W	3000K/4000K/5000K	14.47"	6.45"	9.25"
07-WPTSR-1715129L-3CCT	9,413 lumens 12,350 lumens 14,803 lumens 16,817 lumens	59 78 96 110	159 lm/W 157 lm/W 155 lm/W 152 lm/W	3000K/4000K/5000K	14.47"	6.45"	9.25"

### ADJUSTABLE WALL PACK SENSOR READY

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 167,000 hours
- Built-in photocell standard
- Emergency Driver Installed- EM4



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPASR-6543L-3CCT	2,806 lumens 3,909 lumens 4,837 lumens 6,002 lumens	18 25 31 39	153 lm/W 154 lm/W 154 lm/W 152 lm/W	3000K/4000K/5000K	7.72"	5.8"	8.37"
07-WPASR-121086L-3CCT	6,693 lumens 8,213 lumens 9,589 lumens 11,875 lumens	42 52 61 78	161 lm/w 159 lm/W 157 lm/W 152 lm/W	3000K/4000K/5000K	7.72"	5.8"	8.37"

## FULL CUT-OFF WALL PACK SENSOR READY

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- Built-in photocell standard
- L70 = 167,000 hours
- Emergency Driver Installed- EM8



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPFCSR-9865L-3CCT	5,015 lumens	31	164 lm/W	3000K/4000K/5000K	10.06"	8.86"	6.25"
	6,295 lumens	39	161 lm/W				
	8,042 lumens	51	159 lm/W				
	9,010 lumens	57	157 lm/W				
07-WPFCSR-17151310L-3CCT	9,638 lumens	58	165 lm/w	3000K/4000K/5000K	14.49"	9.25"	6.44"
	12,561 lumens	77	163 lm/W				
	15,090 lumens	94	161 lm/W				
	17,186 lumens	108	159 lm/W				

## HALF MOON FULL CUTOFF WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- Built-in photocell
- L70 = 160,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPHM-875L-3CCT	5,896 lumens	39	151 lm/W	3000K/4000K/5000K	10.46"	6.76"	4.51"
	7,142 lumens	49	147 lm/W				
	8,352 lumens	58	144 lm/W				
07-WPHM-13108L-3CCT	8,839 lumens	58	152 lm/W	3000K/4000K/5000K	13.98"	8.72"	6.04"
	11,438 lumens	77	148 lm/W				
	13,690 lumens	95	144 lm/W				

## ECONOMY/SMALL WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- Built-in photocell standard
- L70 = 153,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPE-432L-3CCT	2,081 lumens	14	148 lm/W	3000K/4000K/5000K	9.06"	5.91"	2.87"
	2,788 lumens	19	149 lm/W				
	3,948 lumens	27	144 lm/W				

## ROTATABLE WALL PACK SENSOR READY

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- Built-in photocell
- L70 = 159,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-WPRSR-19161310L-3CCT	10,271 lumens	60	172 lm/W	3000K/4000K/5000K	9.37"	6.27"	10.15"
	13,102 lumens	77	170 lm/W				
	16,060 lumens	97	166 lm/W				
	18,713 lumens	115	163 lm/W				

## BULK HEAD LUMINAIRE

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- IK08
- Built in photocell
- L70 = 157,000 hours



Faceplates	
07-BH-GRID-VERT-FP	Cutoff Vertical Grid Faceplate
07-BH-GRID-HOZ-FP	Cutoff Horizontal Grid Faceplate
07-BH-GRID-FP	Cutoff Grid Faceplate

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
07-BH-432L-3CCT	3,824 lumens	26	146 lm/W	3000K/4000K/5000K	10.31"	5.27"	3.62"
	3,385 lumens	23	147 lm/W				
	2,875 lumens	19	149 lm/W				

Values shown with no faceplate.

## ARCHITECTURAL PENDANT CYLINDER LUMINAIRE

- Field selectable output and color temperature
- Surface or cord mount
- Universal voltage 120-277V AC
- Power factor >0.90
- CRI >90
- Silicon dioxide glass lens
- L70 = 140,000 hours



Mounting	
10-APEN4-MT-STEM	Stem Mount
10-APEN4-JBOX-COVER	Junction Box Cover



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-APEN4-221L-SCCT	1,119 lumens	12	97 lm/W	2700K/3000K/3500K/4000K/5000K	4.17"	4.17"	8.27"
	1,509 lumens	16	95 lm/W				
	1,766 lumens	19	93 lm/W				

## UP/DOWN CYLINDER LUMINAIRE

- Field selectable output and color temperature
- Light direction switch
- Universal voltage 120-277V
- Power factor >0.90
- CRI >90
- Built in photocell
- 0-10VDC Dimming drivers
- L70 = 140,000 hours (07-CYL-UPDN)
- L70 = 153,000 hours (07-CYL-UPDN-2L)



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Head Dia. (in)	Length (in)	Width (in)	Height (in)
07-CYL-UPDN-976L-3CCT	864 lumens 707 lumens 565 lumens	9 7 6	94 lm/W 94 lm/W 94 lm/W	3000K/4000K/5000K	3.07"	4.5"	5.4"	8.98"
07-CYL-UPDN-201712L-3CCT	1,959 lumens 1,662 lumens 1,225 lumens	20 17 12	99 lm/W 94 lm/W 101 lm/W	3000K/4000K/5000K	4.17"	4.5"	6.7"	11"
07-CYL-UPDN-302722L-3CCT	2,912 lumens 2,660 lumens 2,162 lumens	34 30 23	85 lm/W 90 lm/W 92 lm/W	3000K/4000K/5000K	5.71"	5.7"	8.4"	13"
07-CYL-UPDN-2L-3K-120V	2,446 lumens	30	82 lm/W	3000K	4.3"	6.81"	4.33"	11.8"
07-CYL-UPDN-2L-4K-120V	2,467 lumens	30	82 lm/W	4000K	4.3"	6.81"	4.33"	11.8"
07-CYL-UPDN-2L-5K-120V	2,509 lumens	30	82 lm/W	5000K	4.3"	6.81"	4.33"	11.8"

"We've been consistently impressed with the quality of lights from Contractor Lighting & Supply. Not only have we experienced zero fixture failures, but their customer service is top-notch. Highly recommend!"

-Mark, iXsystems

## DUSK-TO-DAWN LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours
- NEMA photocell standard
- Polycarbonate lens



Mounting	
08-LED-DDALS-N-ARM	Arm Mount with bracket



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
08-DDAL-5L-5k-PC	4,900 lumens	37	133 lm/W	5000K	10"	7"	6"

**PREMIUM VAPOR-TIGHT LIGHT**

- cULus Sanitation listed for non-splash food zones to comply with NSF/ANSI 2 standards
- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 137,000 hours
- NEMA 4x
- IP66 rated



Product Number	Selectable Lumen Output	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-VTSR-211816L-3CCT	16,261 lumens 18,257 lumens 21,066 lumens	95 110 125	170 lm/W 167 lm/W 168 lm/W	3500K/4000K/5000K	47.5"	10.5"	4.5"

**8FT VAPOR TIGHT SENSOR READY**

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 174,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-VTSR-8FT-12109L-3CCT	9,596 lumens 10,837 lumens 12,716 lumens	66 76 90	145 lm/W 143 lm/W 141 lm/W	3500K/4000K/5000K	94.49"	3.74"	3.11"

**VAPOR-TIGHT SLIM LIGHT**

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 178,000 hours
- Emergency Drivers available
- NSF Listed
- NEMA 4X



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-VTSR-765L-3CCT	7,611 lumens 6,198 lumens 5,303 lumens	51 43 36	149 lm/W 144 lm/W 147 lm/W	3500K/4000K/5000K	47"	3.8"	3"




**BEST VALUE.  
RELIABLE SUPPORT.  
EXPERT GUIDANCE.**

Join our hundreds of repeat customers who rely on us to power their projects. With live support and expert guidance, we can be your trusted partner in lighting projects, from design to delivery.

Talk to a representative today to learn more.

## PREMIUM LINEAR HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- Sensor ready-Screw-in RCA receptacle
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional Passive Infrared (PIR) or microwave sensor sold separately
- L70 = 134,000 hours
- Emergency drivers available
- Optional narrow to wide distribution



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-HBLSR-181512L-LKFS	18,085 lumens 14,555 lumens 12,007 lumens	120 96 76	150 lm/W 152 lm/W 158 lm/W	4000K/5000K	16.5"	10.25"	1.8"
20-HBLSR-241815L-LKFS	24,047 lumens 18,017 lumens 15,021 lumens	158 115 94	152 lm/W 157 lm/W 159 lm/W	4000K/5000K	23"	10.25"	1.8"
20-HBLSR-363024L-LKFS	35,517 lumens 30,037 lumens 24,049 lumens	237 193 152	150 lm/W 156 lm/W 158 lm/W	4000K/5000K	31"	10.25"	1.8"
20-HBLSR-604836L-LKFS	60,104 lumens 48,182 lumens 37,049 lumens	404 312 236	149 lm/W 154 lm/W 157 lm/W	4000K/5000K	44"	10.25"	1.8"

## FULL-BODY LINEAR HIGH BAY

- Universal voltage 120-277V; optional 347-480V (-UNC)
- Power factor >0.90
- Sensor Ready-Screw-in RCA receptacle (sensor sold separately)
- 0-10Vdc dimming
- Field selectable output and color temperature
- L70 = 135,000 hours
- Chain mounting kit is standard, other mounting options are available
- Optional Passive Infrared (PIR) or microwave sensor sold separately



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-FHBSR-181512L-LKFS	18,260 lumens 15,387 lumens 12,454 lumens	127 104 82	143 lm/W 148 lm/W 153 lm/W	4000K/5000K	13"	9.5"	2.2"
20-FHBSR-241815L-LKFS	23,772 lumens 18,164 lumens 15,480 lumens	158 116 98	150 lm/W 156 lm/W 159 lm/W	4000K/5000K	14.2"	10.25"	2.4"
20-FHBSR-363024L-LKFS	35,415 lumens 29,825 lumens 24,204 lumens	235 192 151	150 lm/W 155 lm/W 160 lm/W	4000K/5000K	19.7"	10.25"	2.6"
20-FHBSR-604836L-LKFS	59,117 lumens 47,698 lumens 36,167 lumens	390 305 225	152 lm/W 156 lm/W 161 lm/W	4000K/5000K	30.7"	11"	2.6"

\*Nominal values shown for CCT set at 4000K

## ADJUSTABLE LINEAR HIGH BAY

- Universal voltage 120-277V
- Field selectable output and color temperature
- Sensor Ready-Screw-in RCA receptacle
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- L70 = 148,000 hours
- Optic panels rotate up to 135 degrees
- Passive Infrared (PIR) and microwave sensor sold separately



Accessories Sold Separately	
20-HBLASR-WGK-24X4	Wire-guard kit – 15L & 24L
20-HBLASR-WGK-24X5	Wire-guard kit – 30L
20-HBLASR-PMK-S	Pendant mount kit – all models
20-HBLASR-SMK-S	Surface mount kit – all models



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-HBLASR-15129L-LKFS	15,819 lumens	107	148 lm/W	4000K/5000K	25.8"	12.1"	2"
	12,681 lumens	83	152 lm/W				
	9,935 lumens	64	155 lm/W				
20-HBLASR-241815L-LKFS	23,645 lumens	157	150 lm/W	4000K/5000K	25.8"	12.1"	2"
	17,959 lumens	115	156 lm/W				
	15,038 lumens	95	158 lm/W				
20-HBLASR-302418L-LKFS	31,090 lumens	205	151 lm/W	4000K/5000K	25.8"	12.1"	2"
	25,457 lumens	163	157 lm/W				
	19,469 lumens	121	161 lm/W				

CLS only stocks LED High Bay Lights from trusted suppliers who use premium materials and adhere to high safety standards.

LED High Bay Lights are an excellent choice for businesses looking to upgrade their lighting fixtures and save on energy costs.

## ADJUSTABLE LINEAR HIGH BAY

- Universal voltage 120-277V
- Field selectable output and color temperature
- Screw in sensor ready
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Passive Infrared (PIR) sensor sold separately
- L70 = 167,000 hours
- Optic panels rotate up to 135 degrees



Accessories Sold Separately	
20-HBLASR-PMK	Pendant mount kit – all models
20-HBLASR-SMK	Surface mount kit – all models



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
20-HBLASR-4541383325L-3CCT	26,027 lumens	160	163 lm/W	3000K/4000K/5000K	24.8"	14.57"	1.5"
	33,757 lumens	211	160 lm/W				
	38,205 lumens	242	158 lm/W				
	40,792 lumens	261	157 km/W				
	43,947 lumens	284	155 km/W				

## PREMIUM ROUND HIGH BAY

- Universal voltage 120-277V; optional 347-480V (-UNC)
- Power factor >0.90
- 0-10Vdc dimming
- Field selectable output and color temperature
- Sensor Ready- screw-in RCA receptacle
- Optional Passive Infrared (PIR) or microwave sensor sold separately
- L70 = 146,000 hours
- Available in black or white



Accessories Sold Separately	
20-HD07VR-PH-1	Passive Infrared Sensor
20-HD07VR-MH-B-1	Microwave step-dimming sensor
20-HBSD-325W-480-277	347-480V step-down transformer
20-HBRSR-ALREF-S	90° aluminum reflector - 20-HBRSR-221816L-4K5K models
20-HBRSR-PCREF-S	90° polycarbonate reflector - 20-HBRSR-221816L-4K5K models
20-HBRSR-ALREF-L	90° aluminum reflector - 20-HBRSR-353024L-4K5K models
20-HBRSR-PCREF-L	90° polycarbonate reflector - 20-HBRSR-353024L-4K5K models
20-HBRSR-YOKE-(X)	Yoke mount - all models (X)= -WHT or -BLK
20-LEDHBRNSN-PSH-PRM-V2	Pendant snap hook - all models

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Diameter (in)	Height (in)	Color
20-HBRSR-221816L-4K5K	22,935 lumens	147	156 lm/W	4000K/5000K	10.6"	5.5"	WHT BLK
	18,790 lumens	115	163 lm/W				
	15,891 lumens	95	168 lm/W				
20-HBRSR-353024L-4K5K	35,716 lumens	229	156 lm/W	4000K/5000K	13"	5.6"	WHT BLK
	30,801 lumens	192	161 lm/W				
	24,368 lumens	146	167 lm/W				

## PREMIUM WRAP LIGHT

- Field selectable output and color temperature
- Optional factory installed passive infrared (PIR) or microwave sensor
- Universal voltage 120-277V
- Emergency drivers available
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- L70 = 196,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-WR-5L-LKFS	5,837 lumens	39	149 lm/W	3500K/4000K/5000K	47.7"	7.1"	2.8"
	4,932 lumens	32	152 lm/W				
	4,336 lumens	28	154 lm/W				

## ECONOMY WRAP LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- L70 = 196,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-WRE-6L-LKFS	5,880 lumens	45	131 lm/W	3500K/4000K/5000K	47.6"	5.4"	2"
	5,017 lumens	39	128 lm/W				
	3,925 lumens	30	131 lm/W				

## STRIP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SL-4FT-5L-LKFS	5,203 lumens	34	152 lm/W	3500K/4000K/5000K	47.3"	3.3"	3.5"
	4,317 lumens	30	143 lm/W				
	3,631 lumens	25	143 lm/W				
10-SL-8FT-10L-LKFS	10,124 lumens	68	149 lm/W	3500K/4000K/5000K	94.2"	3.3"	3.5"
	8,483 lumens	60	141 lm/W				
	7,135 lumens	55	130 lm/W				

## STRIP LIGHT SLIM

- Universal voltage 120-277V
- Field selectable output and color temperature
- Optional passive infrared (PIR) sensor
- Emergency drivers available
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- L70 = 196,000 hours




Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SLS-4FT-5L-LKFS	5,025 lumens	33	151 lm/W	3500K/4000K/5000K	47.3"	2.4"	2.8"
	4,305 lumens	30	143 lm/W				
	3,622 lumens	25	143 lm/W				
10-SLS-8FT-10L-LKFS	9,976 lumens	67	149 lm/W	3500K/4000K/5000K	94.2"	2.4"	2.8"
	8,862 lumens	58	152 lm/W				
	7,567 lumens	48	156 lm/W				

## STRIP LIGHT SENSOR READY

- Field selectable output and color temperature
- Screw in sensor ready. Sensor and remote control sold separately
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- L70 = 165,000 hours




Mounting	
10-SLSR-CHAIN	Chain Mount Kit
10-SLSR-SMKT	Surface Mount
10-CMK-3	Cable Mount Kit incl. 3 meter cables
10-CMK-5	Cable Mount Kit incl. 5 meter cables
10-SLSR-CONNECT-BRKT	End to End Connecting Bracket
10-SLSR-CORNER-BRKT	Corner Mount Bracket



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SLSR4-5432L-5CCT	5,238 lumens	33	160 lm/W	3000K/3500K/ 4000K/5000K/6500K	47.32"	2.83"	2.52"
	4,147 lumens	25	163 lm/W				
	3,405 lumens	20	167 lm/W				
	2,640 lumens	16	168 lm/W				
10-SLSR4-131087L-5CCT	12,569 lumens	82	153 lm/W	3000K/3500K/ 4000K/5000K/6500K	47.32"	2.83"	2.52"
	10,449 lumens	66	157 lm/W				
	8,421 lumens	52	161 lm/W				
	6,418 lumens	39	165 lm/W				
10-SLSR8-10865L-5CCT	9,958 lumens	64	156 lm/W	3000K/3500K/ 4000K/5000K/6500K	94.17"	2.83"	2.52"
	8,011 lumens	50	161 lm/W				
	6,241 lumens	38	164 lm/W				
	5,144 lumens	31	166 lm/W				
10-SLSR8-21161513L-5CCT	21,514 lumens	146	148 lm/W	3000K/3500K/ 4000K/5000K/6500K	94.17"	2.83"	2.52"
	17,084 lumens	111	155 lm/W				
	15,611 lumens	100	157 lm/W				
	13,425 lumens	84	160 lm/W				

## STRIP LIGHT MICRO

- Field selectable color temperature
- Universal voltage 120V
- Power factor >0.90
- CRI >90
- Polycarbonate lens
- L70 = 91,000 hours

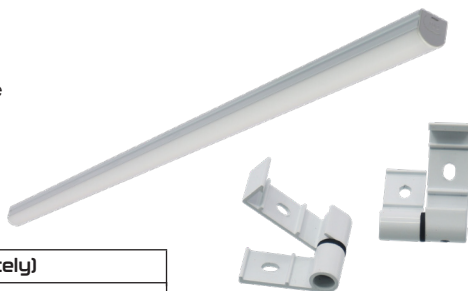

Connectors (Sold Separately)	
10-ZZ-SLM-CONNECT-6	6" Connector
10-ZZ-SLM-CONNECT-12	12" Connector
10-ZZ-SLM-CONNECT-24	24" Connector
10-ZZ-SLM-CONNECT-36	36" Connector
10-ZZ-SLM-CONNECT-72	72" Connector
10-ZZ-SLM-CONNECT-E2E	Replacement End-To-End Connector



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SLM-12-4L-5CCT	478 lumens	5	90 lm/W	2700K/3000K/ 3500K/4000K/5000K	12"	1"	1"
10-SLM-24-6L-5CCT	951 lumens	11	90 lm/W	2700K/3000K/ 3500K/4000K/5000K	24"	1"	1"
10-SLM-36-9L-5CCT	1,241 lumens	16	77 lm/W	2700K/3000K/ 3500K/4000K/5000K	36"	1"	1"
10-SLM-48-18L-5CCT	1,986 lumens	19	104 lm/W	2700K/3000K/ 3500K/4000K/5000K	48"	1"	1"

## ARCHITECTURAL LINEAR DIRECT-INDIRECT

- Field selectable output and color temperature
- Universal voltage 120-277V AC
- Power factor >0.90
- CRI >80
- 0-10VDC dimming
- L70 = 175,000 hours



Connectors (Sold Separately)	
10-ALDI-CONNECT-L-WHT	"L" shape Connector, White
10-ALDI-CONNECT-L-BLK	"L" shape Connector, Black
10-ALDI-CONNECT-T-WHT	"T" shape Connector, White
10-ALDI-CONNECT-T-BLK	"T" shape Connector, Black
10-ALDI-CONNECT-X-WHT	"X" shape Connector, White
10-ALDI-CONNECT-X-BLK	"X" shape Connector, Black

Mounting Methods (Sold Separately)	
10-ALDI4-MT-RECESSED	Recessed Mount Kit
10-ALDI4-MT-T-GRID-WHT/BLK	T-Grid Mount Kit, White/Black
10-ALDI-MT-SUSPENSION-WHT/BLK	Suspension Mount Kit, White/Black
10-ALDI-MT-SURFACE-WHT/BLK	Surface & Wall Mount Kit, White/Black
0-ALDI-MT-CABLE	Cable Mount Kit, T & X Connectors



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-ALDI4-5432L-5CCT-WHT	4,698 lumens	40	116 lm/W	2700K/3000K/ 3500K/4000K/5000K	48.15"	2.13"	3.33"
	4,735 lumens	41	114 lm/W				
	4,809 lumens	41	117 lm/W				
10-ALDI4-5432L-5CCT-BLK	5,078 lumens	41	125 lm/W	2700K/3000K/ 3500K/4000K/5000K	48.15"	2.13"	3.33"
	5,044 lumens	41	122 lm/W				
	5,008 lumens	43	118 lm/W				

Contact your representative for other lengths and configurations.



### "L" Connector




### "T" Connector




### "X" Connector




Surface mount & Wall kit




T-Grid suspension kit




Suspension mount kit



Cable kit for connection



Recessed mount kit



Power cord

## STAIRWELL LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional occupancy/dimming sensor
- L70 = 190,000 hours
- Emergency drivers available

2 SIZES



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-SW-LKFS	6,499 lumens	45	146 lm/W	3500K/4000K/5000K	48"	4.5"	4"
	4,941 lumens	33	150 lm/W				
	4,311 lumens	28	152 lm/W				
10-SW-2FT	3,462 lumens	24	141 lm/W	3500K/4000K/5000K	22"	4.3"	4"
	2,880 lumens	20	143 lm/W				
	2,132 lumens	15	143 lm/W				

## T8 LED REPLACEMENT LAMPS

- Universal voltage 120-277V
- Non-dimming
- CRI>80
- L70 = 131,000 hours
- 12-T8L-7X (8-ft) Series- Double-ended, integrated driver, Type B for bypass only
- 4-ft lamp Series- Single or double-ended, integrated driver, Type B for bypass only



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
12-T8L-IDFH13-2200-4FT-CBA-7B	2,200 lumens	17	130 lm/W	4000K	47.17"	1"	1"
12-T8L-IDFH13-2200-4FT-EBA-7B	2,200 lumens	17	130 lm/W	5000K	47.17"	1"	1"
12-T8L-IDFH11-5500-8FT-CBA-7X	5,500 lumens	40	138 lm/W	4000K	93.25"	1"	1"
12-T8L-IDFH11-5500-8FT-EBA-7X	5,500 lumens	40	138 lm/W	5000K	93.25"	1"	1"
12-L8L1BPMFH-G2111215A8TSE22004C01	2,100 lumens*	17*	124 lm/W*	Selectable 3000/3500/4000/5000/6500K	47.2"	1"	1"
12-L8L2BPDFH-G1243240A8TSE55008CG1	5,500 lumens*	17*	124 lm/W*	Selectable 3000/3500/4000/5000/6500K	93.25"	1"	1"

## T5 LED REPLACEMENT LAMPS

- Universal 120-277V
- Non-dimming
- L70 = 54,000 hours
- CRI>80
- Double-ended, integrated driver, Type B for bypass only



Product Number	Lumen Output	Watts	CCT	Length (in)	Width (in)	Height (in)
12-T5L-ISFH14-3500-4FT-EBA-01	3,500 Lumens	25	5000	45.2"	0.7"	0.7"

## ECONOMY UNDER CABINET LIGHT

- Standard 120V
- Power factor >0.90
- CRI >90
- Triac dimming
- Field selectable color temperature
- L70 = 196,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
05-UCE-9-KFS	412	5	86 lm/W	27K/30K/35K/40K/50K	9"	3.5"	1"
05-UCE-12-KFS	450	5	92 lm/W	27K/30K/35K/40K/50K	12"	3.5"	1"
05-UCE-18-KFS	770	9	88 lm/W	27K/30K/35K/40K/50K	18"	3.5"	1"
05-UCE-21-KFS	764	9	90 lm/W	27K/30K/35K/40K/50K	21"	3.5"	1"
05-UCE-24-KFS	803	9	91 lm/W	27K/30K/35K/40K/50K	24"	3.5"	1"
05-UCE-33-KFS	1,245	14	91 lm/W	27K/30K/35K/40K/50K	33"	3.5"	1"
05-UCE-42-KFS	1,543	18	88 lm/W	27K/30K/35K/40K/50K	42"	3.5"	1"

## UNDERCABINET LIGHT

- Universal voltage 120V
- Power factor >0.90
- CRI >90
- Triac dimming
- Field selectable color temperature
- Built-in PIR sensor
- Adjustable light bar
- L70 = 167,000 hours
- Title 24 CA Energy Compliant




Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
05-UC9-3L-5CCT	344	4	86 lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	8.98"	3.35"	1.51"
05-UC12-8L-5CCT	764	8	97 lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	11.97"	3.35"	1.51"
05-UC18-12L-5CCT	1,152	12	99 lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	17.99"	3.35"	1.51"
05-UC24-16L-5CCT	1,638	16	105 lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	23.98"	3.35"	1.51"
05-UC36-23L-5CCT	2,338	23	102 lm/W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	36.02"	3.35"	1.51"

## CENTER BASKET

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 180,000 hours
- Emergency drivers available



Mounting Accessories and Emergency Drivers (Sold Separately)	
10-SMKT-14	Surface Mount Kit for 1x4 panel
10-FLANGEKIT14-ET	Flange Mount Kit for 1x4 Panel
10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-LEDPNL2x2-FK	Flange Mount Kit for 2x2 panel
10-LEDPNL2x4-FK	Flange Mount Kit for 2x4 Panel
10-PNL-CM	Cable Mount Kit
03-BLEM-CP-5C	Remote Mount Emergency driver - EM5
03-BLEM-CP-10C	Remote Mount Emergency driver - EM10
03-BLEM-CP-13C	Remote Mount Emergency driver - EM13



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-CB14-4L-LKFS	3,444 lumens	24	144 lm/W	3500K/4000K/5000K	47.76"	11.73	2.13"
	4,105 lumens	29	142 lm/W				
	4,345 lumens	32	137 lm/W				
10-CB22-4L-LKFS	3,608 lumens	25	147 lm/W	3500K/4000K/5000K	23.7"	23.7"	2.13"
	4,174 lumens	29	145 lm/W				
	4,769 lumens	33	143 lm/W				
10-CB24-6L-LKFS	4,670 lumens	32	145 lm/W	3500K/4000K/5000K	47.76"	23.7"	2.13"
	5,174 lumens	36	144 lm/W				
	5,974 lumens	42	141 lm/W				

## PANEL LIGHTS

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 144,000 hours
- L70 = 169,000 hours (10-PNL2X4-98654L-PRM)
- All lights except 10-PNL2X4-98654L-PRM are Flicker-Free per IEEE1789-2015



Mounting Accessories (Sold Separately)	
10-SMKT-14	Surface Mount Kit for 1x4 panel
10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-LEDPNL1x4-FK	Flange Mount kit for 1x4 panel
10-FLANGEKIT22-ET	Recessed Flange Mount Kit for 2x2 panel
10-FLANGEKIT24-ET	Recessed Flange Mount Kit for 2x4 Panel
10-PNL-CM	Cable Mount Kit



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-PNL1X4-40L-LKFS	4,342 lumens	33	131 lm/W	3500K/4000K/5000K	47.7"	11.8"	1.5"
	3,713 lumens	27	137 lm/W				
	2,729 lumens	19	140 lm/W				
10-PNL2X2-40L-LKFS	4,290 lumens	32	135 lm/W	3500K/4000K/5000K	23.7"	23.7"	1.5"
	3,810 lumens	27	142 lm/W				
	2,800 lumens	19	145 lm/W				
10-PNL2X4-50L-LKFS	5,247 lumens	37	141 lm/W	3500K/4000K/5000K	47.7"	23.7"	1.5"
	4,576 lumens	32	144 lm/W				
	3,323 lumens	23	148 lm/W				
10-PNL2X4-98654L-5CCT-PRM (-EM)	9,127 lumens	67	135 lm/W	3000K/3500/4000K 5000K/6500K	47.7"	23.7"	1.5"
	7,908 lumens	57	139 lm/W				
	6,709 lumens	47	143 lm/W				
	5,520 lumens	38	146 lm/W				
	4,091 lumens	28	148 lm/W				

## BACKLIT LED TROFFER THREE TIERED PANELS

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 180,000 hours



Mounting Accessories (Sold Separately)	
10-FLANGEKIT22-ET	Recessed Flange Mount Kit for 2x2 panel
10-FLANGEKIT24-ET	Recessed Flange Mount Kit for 2x4 panel
10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-PNL-CM	Cable Mount Kit




Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
10-PNLASR22-4322L-5CCT	4,508 lumens	31	143 lm/W	2700K/3000/3500K 4000K/5000K	23.74"	23.74"	1.34"
	3,698 lumens	25	148 lm/W				
	2,892 lumens	19	152 lm/W				
	2,338 lumens	15	155 lm/W				
10-PNLASR24-6543L-5CCT	5,969 lumens	42	144 lm/W	3000K/3500/4000K 5000K/6500K	47.76"	23.74"	1.34"
	5,027 lumens	34	147 lm/W				
	4,102 lumens	28	149 lm/W				
	3,167 lumens	21	151 lm/W				

## ARCHITECTURAL LED DOWNLIGHT

- Universal Voltage 120-277V
- Field selectable output and color temperature
- 0-10Vdc dimming
- Power factor >0.90
- L70 = 149,000 hours
- IC rated
- New construction or retrofit applications



Mounting Accessories (Sold Separately)	
06-MP-UD46810-NC	Mounting Plate



Trim Rings (4", 6", & 8" only)	
Part Number	Description
06-CDR4-TR-BK	4" Black Trim
06-CDR6-TR-BK	6" Black Trim
06-CDR8-TR-BK	8" Black Trim
06-CDR10-TR-BK	10" Black Trim

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-CDR4-1L-LKFS-WHT (White Baffle)	1,135 lumens	11	100 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
	877 lumens	9	102 lm/W				
	593 lumens	6	103 lm/W				
06-CDR4-1L-LKFS-SW (Specular White)	1,136 lumens	11	101 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
	862 lumens	8	104 lm/W				
	578 lumens	6	105 lm/W				
06-CDR6-2L-LKFS-WHT	2,092 lumens	20	105 lm/W	2700K/3000K/4000K/5000K	8.4"	8.4"	4.2"
	1,743 lumens	16	109 lm/W				
	1,201 lumens	12	103 lm/W				
06-CDR6-2L-LKFS-SW	1,921 lumens	18	106 lm/W	2700K/3000K/4000K/5000K	8.27"	8.27"	4.36"
	1,448 lumens	14	106 lm/W				
	1,039 lumens	10	104 lm/W				
06-CDR8-5L-LKFS-WHT	4,759 lumens	48	99 lm/W	2700K/3000K/4000K/5000K	10"	10"	5.41"
	4,209 lumens	41	101 lm/W				
	3,321 lumens	62	105 lm/W				
06-CDR8-5L-LKFS-SW	4,723 lumens	47	101 lm/W	2700K/3000K/4000K/5000K	10"	10"	5.41"
	3,837 lumens	40	95 lm/W				
	2,955 lumens	31	96 lm/W				
06-CDR10-5L-LKFS (SW only)	4,797 lumens	47	102 lm/W	2700K/3000K/4000K/5000K	11"	11"	6"
	3,710 lumens	40	92 lm/W				
	2,947 lumens	31	95 lm/W				

## 2" CANLESS RECESSED DOWNLIGHT


- Field selectable output and color temperature
- Universal 120V (60Hz)
- Power factor >0.90
- L70 = 134,000 hours
- Triac dimming
- Complies with Title 24
- New construction applications



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT*	Length (in)	Width (in)	Height (in)
10-IMODCR52-543L-5CCT	331 lumens	4	85 lm/W	2700/3000/3500/ 4000/5000K	3.23"	3.23"	1.75"
	502 lumens	6	86 lm/W				
	664 lumens	8	85 lm/w				

## CANLESS RECESSED DOWNLIGHT

- Dedicated 120V (60Hz)
- Field selectable color temperature
- Power factor >0.90
- L70 = 174,000 hours
- IC rated
- Triac dimming
- New construction or retrofit applications



Mounting Accessories (Sold Separately)	
06-MP-UD346-NC	Mounting Plate
06-MP-UD46810-NC	Mounting Plate



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT*	Length (in)	Width (in)	Height (in)
10-IMODCR4-8L-KFS	871 lumens	9	95 lm/W	2700/3000/3500/ 4000/5000K	5.5"	5.5"	2"
10-IMODCR6-12L-KFS	1403 lumens	14	86 lm/W	2700/3000/3500/ 4000/5000K	7.4"	7.4"	2"

## GIMBAL CANLESS RECESSED DOWNLIGHT

- Field selectable color temperature
- Universal 120V (60Hz)
- Power factor >0.90
- L70 = 170,000 hours
- Triac dimming
- Complies with Title 24
- New construction or retrofit applications



Mounting Options (Sold Separately)	
06-MP-UD346-NC	Mounting Plate
06-MP-UD46810-NC	Mounting Plate

Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT*	Length (in)	Width (in)	Height (in)
10-IMODCGR4-8L-5CCT	873 lumens	10	89 lm/w	2700/3000/3500/ 4000/5000K	5.28"	5.28"	1.53"
10-IMODCGR6-10L-5CCT	1,188 lumens	14	87 lm/W	2700/3000/3500/ 4000/5000K	7.05"	7.05"	1.72"

## CANLESS RECESSED DOWNLIGHT WITH FLOATING GIMBAL

- Dedicated 120V (60Hz)
- Power factor >0.90
- CRI >90
- Triac dimming
- Field selectable color temperature
- L70 = 134,000 hours (2 and 3-inch)
- L70 = 120,000 hours (4-inch)
- L70 = 191,000 hours (6-inch)
- Complies with Title 24



Mounting Accessories (Sold Separately)	
06-MP-UD346-NC*	Mounting Plate

\* Not compatible with 06-IFG2-4L-5CCT

Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
10-IFG2-4L-5CCT	422 lumens	5	90 lm/W	2700K/3000K/3500/4000K/5000K	3.5"	3.5"	1.46"
10-IFG3-5L-5CCT	549 lumens	6	95 lm/W	2700K/3000K/3500/4000K/5000K	3.94"	3.94"	1.15"
10-IFG4-7L-5CCT	738 lumens	8	89 lm/W	2700K/3000K/3500/4000K/5000K	4.80"	4.80"	1.47"
10-IFG6-12L-5CCT	1,049 lumens	11	95 lm/W	2700K/3000K/3500/4000K/5000K	6.89"	6.89"	1.77"

## 4" CANS AND TRIMS

- Standard 120V input
- IC Rated
- Triac dimming
- CRI >90
- L70 = 139,000
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-MODR4-7L-KFS	Round White Baffle Trim	827 lumens	10	84 lm/W	27/30/35/40/50 Kelvin	5.1"	5.1"	2.3"
06-MODGR4-7L-KFS	Round White Gimbal	839 lumens	9	92 lm/W	27/30/35/40/50 Kelvin	5.1"	5.1"	2.4"

4" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
06-4C-LED-NIC-NND	06-4C-LED-RIC-NND

Trim Rings	
Part Number	Description
06-MODR4-TR-BK	4" Black Trim
06-MODR4-TR-BN	4" Brushed Nickel Trim



## 6" CANS AND TRIMS

- Standard 120V input
- IC Rated
- Triac dimming
- CRI>90
- 06-MODR4 L70 = 139,000 hours
- 06-MODGR4 L70 = 174,000 hours
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



06-MODR6



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
06-MODR6-10L-KFS	Round White Baffle Trim	1,227 lumens	14	85 lm/W	27/30/35/40/50 Kelvin	7.4"	7.4"	2.32"
06-MODGR6-10L-KFS	Round White Gimbal	1,276 lumens	15	87 lm/W	27/30/35/40/50 Kelvin	7.4"	7.4"	2.43"


### 6" Dedicated LED IC Rated Recessed Cans

New Construction Can	Remodel Can
06-6C-LED-NIC-NND	06-6C-LED-RIC-NND



06-MODGR6

Trim Rings	
Part Number	Description
06-MODR6-TR-BK	6" Black Trim
06-MODR6-TR-BN	6" Brushed Nickel Trim

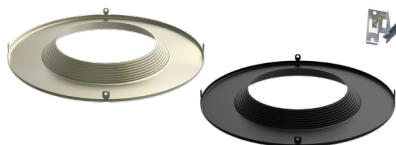

## 6" SLOPED INCANDESCENT RECESSED CANS & TRIMS


- Adjustable socket
- For pitched ceilings 10-30 degrees
- Accommodates up to 75W R30/PAR30 Incandescent lamps
- Thermal protection
- IC Rated



Trim Part	Description	Lamping	Trim Color	Baffle Color
06-6T-SLP-BW	Sloped White Baffle Trim	E26 PAR30/R30 up to 75W	White	White
06-6T-SLP-BB	Sloped Black Baffle Trim	E26 PAR30/R30 up to 75W	White	Black

### 6" Sloped Ceiling IC Rated Recessed Cans

New Construction Can	Remodel Can
06-6C-SLPN-ICAT	06-6C-SLPR-ICAT

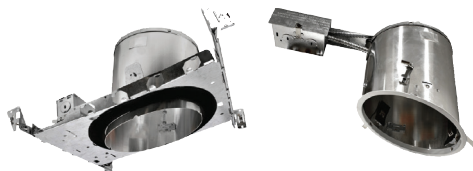

## FLAT PANEL LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 139,000 hours



Trim Rings (4" & 6" only)	
Part Number	Description
10-FPR4-TR-BK	4" Black Trim
10-FPR-TR-BN	4" Brush Nickel Trim
10-FPR6-TR-BK	6" Black Trim
10-FPR6-TR-BN	6" Brush Nickel Trim



Mounting Accessories (Sold Separately)	
11-MP-UD346-NC	Mounting Plate

Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
10-FPR3-4L-KFS	400 lumens	6	66 lm/W	2700K/3000K/3500K/4000K/5000K	3.6"	3.6"	0.9"
10-FPR4-6L-KFS	600 lumens	9	85 lm/W	2700K/3000K/3500K/4000K/5000K	4.7"	4.7"	0.8"
10-FPR6-10L-KFS	1,000 lumens	15	66 lm/W	2700K/3000K/3500K/4000K/5000K	6.7"	6.7"	0.8"
10-FPR8-14L-KFS	1,400 lumens	18	78 lm/W	2700K/3000K/3500K/4000K/5000K	8.9"	8.9"	0.9"



Visit [contractorlighting.com](http://contractorlighting.com) to find utility rebates!

Our user-friendly utility tools help you make well-informed decisions when selecting energy-efficient and sustainable lighting products. Discover available rebates and calculate potential energy savings with ease.

## FLAT PANEL ROUND BAFFLED FIRE RESISTANT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- Fire Resistant for up to 2 hours
- CRI >90
- Triac Dimming
- L70 = 191,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
FPRBFR4-10L-5CCT	1,036 lumens	12	91 lm/W	2700K/3000K/3500K/4000K/5000K	4.92"	4.92"	2.37"
FPRBFR6-12L-5CCT	1,337 lumens	15	92 lm/W	2700K/3000K/3500K/4000K/5000K	6.89"	6.89"	2.31"

## DOUBLE-RING SLIM CEILING LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- CRI >90
- Triac dimming
- Plastic diffuser
- L70 = 120,000 hours
- Brushed nickel ring color



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
20-DRS10-11L-5CCT	1,178 lumens	16	72 lm/W	2700K/3000K/3500K/4000K/5000K	10.24"	10.24"	2.52"
20-DRS12-14L-5CCT	1,473 lumens	20	74 lm/W	2700K/3000K/3500K/4000K/5000K	11.81"	11.81"	2.52"
20-DRS14-15L-5CCT	1,675 lumens	21	79 lm/W	2700K/3000K/3500K/4000K/5000K	13.79"	13.79"	2.56"
20-DRS16-17L-5CCT	1,893 lumens	25	75 lm/W	2700K/3000K/3500K/4000K/5000K	15.77"	15.77"	2.72"
20-DRS18-20L-5CCT	2,193 lumens	29	76 lm/W	2700K/3000K/3500K/4000K/5000K	17.72"	17.72"	3.23"

## DISK LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 134,000 hours
- Complies with Title 24



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
06-DK4-8L-KFS	832 lumens	10	84 lm/W	2700K/3000K/3500K/4000K/5000K	5.87"	5.87"	0.87"
06-DK6-10L-KFS	1,277 lumens	14	88 lm/W	2700K/3000K/3500K/4000K/5000K	7.22"	7.22"	0.9"

## 20-PACK 6" DISK LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- CRI >90
- L70 = 138,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
06-DK6-10L-KFS-BP	1,037 lumens	15	71 lm/W	2700K/3000K/3500K/4000K/5000K	7.22"	7.22"	0.9"

Individual Unit dimensions.

## DISK LIGHT WITH PIR SENSOR

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 139,000 hours
- Complies with Title 24
- CRI >90



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
06-DK4-8L-KFS-OS	837 lumens	10	84 lm/W	2700K/3000K/3500K/ 4000K/5000K	6.02"	6.02"	0.93"
06-DK6-10L-KFS-OS	1,203 lumens	14	87 lm/W	2700K/3000K/3500K/ 4000K/5000K	7.4"	7.4"	1.03"

## ROUND FLAT DISK LIGHTS

- Dedicated 120Vac (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 174,000 hours
- CRI > 90



Trim Rings (7" & 13" only)	
Part Number	Description
20-TR-7-BK	7" Black Trim
20-TR-7-BN	7" Brush Nickel Trim
20-TR-13-BK	13" Black Trim
20-TR-13-BN	13" Brush Nickel Trim



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
20-DL5-8L-5CCT	800 lumens	10	88 lm/W	2700K/3000K/3500K/ 4000K/5000K	5.5	5.5	.79
20-DL7-12L-5CCT	1,200 lumens	15	84 lm/W	2700K/3000K/3500K/ 4000K/5000K	7.5	7.5	.79
20-DL9-14L-5CCT	1,400 lumens	17	85 lm/W	2700K/3000K/3500K/ 4000K/5000K	8.9	8.9	.79
20-DL11-20L-5CCT	2,000 lumens	20	103 lm/W	2700K/3000K/3500K/ 4000K/5000K	11	11	1
20-DL13-22L-5CCT	2,200 lumens	22	104 lm/W	2700K/3000K/3500K/ 4000K/5000K	12.8	12.8	1



Design your lighting layouts the quick and easy way using our Indoor and Outdoor Lighting Design Tools! Use our user-friendly design tool, where you can easily change a fixture's quantity or mounting height to create a custom layout to fit your needs.

Try it out now at [contractorlighting.com](http://contractorlighting.com).

## Low Profile All LED Exit & Emergency Combo

- Dual 120/277 voltage
- Red/Green Selectable available
- 0.5-watt (1 LEDs x 0.50 watt) per head / High Lumen available 2.0W / head)
- 3.6V Long-life rechargeable NiCad battery
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	LED/Letter Color	Housing Color	Options
02-CEU	Universal Single/Double	Red Green RED/GREEN Selectable	White Black	High Lumen Remote Capacity Special Voltage

## Die-Cast Aluminum Exit Sign

- Dual 120/277 voltage
- Premium, die-cast aluminum housing
- Internal automatic switching to emergency battery mode
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Housing Color	Battery	Options
02-XA	Single Double Universal Single/Double	Red Green	White Black Brushed Aluminum	AC-Only EM-Battery Back-up	Dual Circuit Tamper-proof Assembled in USA

## Edge-Lit Exit Sign

- Dual 120/277 voltage
- Premium, extruded aluminum housing
- Internal automatic switching to emergency battery mode
- Mounting canopy for top, end or back mounting
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Panel Color	Housing Color	Battery	Options
02-XEU	Single Double	Red Green	Clear Mirror White	White Black Aluminum	AC-Only EM-Battery Back-up	Dual Circuit (120V. or 277V0 Special Wording

## Compact Thermoplastic Exit Sign

- Dual 120/277 voltage
- Red/Green Selectable available
- Engineering grade, 5VA flame retardant Thermoplastic
- Internal automatic switching to emergency battery mode
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	LED/Letter Color	Housing Color	Battery	Options
02-EZRXTU	Universal Single/Double	Red Green Red/Green Selectable	White Black	AC-Only EM-Battery Back-up	Dual Circuit Custom Wording Assembled in USA

## Exit/Emergency Two-Head Thermoplastic Combo Unit

- Dual 120/277 voltage
- Red/Green Selectable available
- 1.5-watt (3 LEDs x 0.50 watt) per head
- 3.6V Long-life rechargeable NiCad battery
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	LED/Letter Color	Housing Color	Options
02-CEM	Universal Single/Double	Red Green RED/GREEN Selectable	White Black	Remote Capacity

## LED Emergency Thermoplastic Unit

- Dual 120/277 voltage
- 1.2 watt (12 LEDs x 0.10 watts) per head
- 3.6V Long-life rechargeable NiCad battery
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant, high impact resistant thermoplastic
- Meets UL924, NFPA 101, OSHA & Life Safety code



Product Number	Housing Color
02-OEMW	White



## LED Wet Location Emergency Thermoplastic Unit

- Dual 120/277 voltage
- 1.2 watt (12 LEDs x 0.10 watts) per head
- 3.6V Long-life rechargeable NiCad battery
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant, high impact resistant thermoplastic
- Meets UL924, NFPA 101, & Life Safety code




Product Number	Housing Color
02-OWLEM	White



## LED Emergency Unit

- Dual 120/277 voltage
- 1 watt (8 LEDs x 0.125 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Meets UL924, NFPA 101 Life Safety code, NEC, OSHA



Product Number	Housing Color	Options
02-EAW-LED 02-EAW-RC-LED	White Black	Self-Diagnostic Remote Capacity High Lumen



## Reduced Profile LED Adjustable Two-Head Emergency Unit

- Dual 120/277 voltage
- 1.5 watt (3 LEDs x 0.50 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Options
02-EM	White Black	Self-Diagnostic Remote Capacity Assembled in the USA



## Decorative Outdoor LED AC/Emergency Unit

- 4.8V long life, rechargeable NiCad Battery
- Automatic Emergency on switch
- 90 minutes illumination
- Self-Diagnostic monthly, bi-annual and annual testing
- Photocell standard
- Optional internal heater for extreme cold weather
- CEC Title 20 certified optional
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Voltage	Wattage	Output (Lumens)
02-ETD-ACEM-HL	White Black Dark Bronze Nickel	Universal 120-277V	12W	1,286 (AC mode) 350 (DC mode)

## Micro/Mini/Large Inverter Emergency Power Systems

Electrical inverter systems for powering up to 1150W of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz. sinusoidal emergency power to loads.




Optional

Product Number	Capacity	Mounting	Options
23-MPS	20 Watts 32 Watts 35 Watts 55 Watts	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel
23-SPS	55 Watts/125VA 110 Watts/125VA 110Watts/250VA 220Watts/250VA	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel 4C- 4-output Circuit Switching AO-Adjustable Output/Dimmer Bypass
23-LPS	375 Watts 600 Watts 750 Watts 950 Watts 1150 Watts	Surface	Self-Diagnostics 4C- 4-output Circuit Switching 4AO-Adjustable Output/Dimmer Bypass Input Circuit Breaker Output Circuit Breaker

## Emergency Driver for LED Lamps

Our dependable emergency driver provides regulated power to LED lamps during a power outage. Our emergency driver has versatile mounting options: inside, on-top or remote mount. Includes a push-to-test indicator switch.

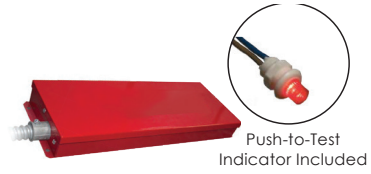

Push-to-Test Indicator Included

Product Number	Output Voltage	Output Wattage
03-LEDEM-BP/DM-20-E	180VDC	20 Watts



## Inline Emergency LED Drivers

AC solution providing voltage to the input side of the connected load. The inline installation makes it perfect for LED recessed downlight applications, outdoor and gasketed fixtures, or any application. Specifically designed for remote applications where there's no access to the LED board.

Using 0-10V dimming, these EM drivers can work with LED fixtures whose full power load is up to 200 W (-HV25) and 350 W (-HV40).



Product Number	Current (mAh)	Output Voltage (VDC)	Output Wattage (W)
03-BLEM-INDRV-HV25	4400 mAh	14.4	25
03-BLEM-INDRV-HV40	6600 mAh	14.4	40

Product Number	Current (mAh)	Output Voltage (VDC)	Output Wattage (W)
03-BLEM-INDRV-HBR30	5200 mAh	14.4	30
03-BLEM-INDRV-HBR40	6600 mAh	14.4	40
03-BLEM-INDRV-HBR60	9900 mAh	14.4	60



## Constant-Power Emergency LED Driver

Provides constant power output to the load during emergency mode operation. Standard models suitable for inside or top mount of LED fixtures. Conduit models suitable for remote mount to LED fixture. Electronic limiting with normal operation resuming upon removal of fault. UL Listed, Field-installed.

- Certified to CEC under Title 20 regulations



Product Number	Current (mA)	Output Voltage (VDC)	Output Wattage (W)	Options
03-BLEM-CP-5	250-100 mA	20-50	5	-C = Provided with 2' flex conduit on each end
03-BLEM-CP-10	535-214 mA	20-50	10.7	
03-BLEM-CP-13	685-274 mA	20-50	13.7	

**MICROWAVE OR DAYLIGHT HARVESTING / OCCUPANCY SENSOR**

**20-HD406VRH-D**

- Multi-volt: 120-277V
- Rated up to 3A @120V
- Operating Temperature of -35°C to 60°C
- Mounts up to 49ft
- Requires remote to adjust factory settings (HD03R)



**360° HIGH BAY OCC SENSOR**

**20-FL-OSFHU-RG-QC**

- Passive Infrared Technology:
- Turn lights ON in response to the heat generated energy
- Mounts directly onto a luminaire
- Operational Mode: Auto ON, Auto OFF
- Time Delay: Adjustable (15 seconds up to 30 minutes)
- Coverage Range: High Bay mounting heights up to 30' mounting / 360° field
- Best coverage area is between 15-26ft
- 120/277VAC, 60Hz Voltage
- Load Requirements: 800VA at 120VAC



**EXTERNAL SCREW-IN PIR SENSOR**

**20-HD09VR-PH5-1 (-90)**

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -20°C to 60°C
- Mounts up to 39ft
- HD09 has 5-dial control for initial programming
- HD07 Requires remote to adjust factory settings (HD05R)
- Detachable angled arm adapter



**EXTERNAL SCREW-IN MICROWAVE SENSOR**

**20-HD09VR-MH5-1 (-90)**

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -40°C to 70°C
- Mounts up to 49ft
- HD09 has 5-dial controls for initial programming
- HD07 Requires remote to adjust factory settings (HD05R)
- Detachable angled arm adapter



**CEILING MOUNTED PIR OCC SENSOR**

**11-CMS-YM2301**

- 360 degree passive infrared sensor
- Range up to 800 sq-ft
- Time-delay adjustment from 15 seconds up to 30 minutes
- Sensitivity adjustment
- Light level sensing adjustment



**RF CONTROL**

**11-PPA401S**

- Multi-volt: 120-277V
- 0-10V Dimming
- Rated for Indoor use only
- Rated up to 1200W
- Remote Required



**BLUETOOTH CONTROL**

**11-PPA102S**


- Multi-volt: 120-277V
- 0-10V Dimming
- Rated up to 13.1A
- Bluetooth Mesh
- App controlled



**3-PIN NEMA PHOTOCELL**

**07-JL-205C23-IP65**

- Multi-volt: 120-277V
- Turns on at 6 lux, turns off at 50 lux
- Rated for Indoor use only
- Rated up to 1800W
- Preset 5-30 second time delay



**480V 3-PIN NEMA PHOTOCELL**

**07-26WA86**

- Input Voltage of 480V
- Turns on at 10-20 lux, off at 30-60 lux
- Operating Temperature of -40°C to 70°C
- Rated up to 1800W



**PHOTOCELLS**

**07-JL-403C**

**07-JL-404C**

- Multi-volt: 120-277V
- Operating Temperatures of -40°C - 70°C
- Preset 3-10 second time delay



**0-10V DIMMERS**

**11-GPDMLV-02-3**  
**11-GPDMLV-12-3**

- Input Voltage: 120V (60Hz)
- Rated up to 600W
- 0-10V dimming
- Compatible with LED/ CFL/Incandescent Lamps and Luminaires
- Single pole and 3 Way applications




**TRIAC DIMMERS**

**1-LUXDMWK600-02-3**  
**11-LUXDMWK600-12-3**


- Input Voltage: 120V (60Hz)
- Rated up to 600W
- Triac dimming
- Compatible with LED/ CFL/Incandescent Lamps and Luminaires
- Single pole and 3 Way applications




PRODUCT NUMBER	SWITCHES
11-YQDS115-Q-W	Single Pole Decora Switch 15 Amp
11-YQDS315-Q-W	3-way Decora Switch 15 Amp
11-YQDS415N-W	4-way Decora Switch 15 Amp
11-YQTS115-W	Single Pole Toggle Switch 15 Amp
11-YQTS315-W	3-Way Toggle Switch 15 Amp
11-YQTS415-W	4-Way Toggle Switch 15 Amp
11-YQTS120-W	Single Pole Toggle Switch 20 Amp
11-YQTS320-W	3-Way Toggle Switch 20 Amp




PRODUCT NUMBER	SENSORS
11-DWOS-3J	Sensor Wall Switch, 120 or 277V, 3-Way, PIR, Decora
11-MWOS	Sensor Wall Switch 120V or 277V, PIR & Ultrasonic, Decora
11-MDC-50V	Sensor Ceiling Mount, 120V or 277V, PIR & Ultrasonic
11-MPC-50V	Sensor Ceiling Mount, PIR, 120V or 277V

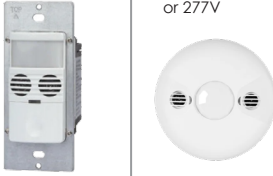


PRODUCT NUMBER	GFCI
11-GPG915L-TR	15 Amp Self Testing Tamper
11-GPG915L-WTR	15 Amp Self Testing Tamper/WR
11-GPG920L-TR	20 Amp Self Testing Tamper
11-GPG920L-WTR	20 Amp Self Testing Tamper/WR



PRODUCT NUMBER	RECEPTACLES
11-DR30A-4S-W	30A Dryer/Range Recep.
11-DR50A-4S-W	50A Dryer/Range Recep.
11-DWUR-15D-1A1C-CC5.0-W	15A Duplex USB Tamper Recep.
11-DWUR-20D-1A1C-CC5.0-W	20A Duplex USB Tamper Recep.
11-YQ115R-W	15A Single Recep.
11-YQ120R-W	20A Single Recep.
11-YQ15R-S-S-D-W	15A Duplex Recep.
11-YQ20R-C-W	20A Duplex Recep.
11-YQ15R-D-S-D-W	15A Duplex Decora Recep.
11-YQ20R-DI-W	20A Decora Duplex Recep.
11-YQ15RS-STR-D-W	15A Duplex Tamper Recep.
11-TR20-SHG-W	20A Duplex Tamper Decora Recep.
11-TR20-SC-W	20A Duplex Tamper Recep.
11-TR20-DC-W	20A Duplex Tamper Decora Recep.
11-TR20-DHG-W	20A Duplex Tamper Decora Recep.
11-YQ15RS-DTR-D-W	15A Duplex Tamper Decora Recep.



PRODUCT NUMBER	WALL PLATES
11-7701	1 Gang Blank Plate
11-7702	2 Gang Blank Plate
11-7772	Dryer 2 Gang Single Plate
11-8801-W	1 Gang Blank Plate
11-8802-W	2 Gang Blank Plate
11-8811-W*	1 Gang Toggle Plate
11-8812-W*	2 Gang Toggle Plate
11-8813-W	3 Gang Toggle Plate
11-8821-W*	1 Gang Duplex Recep. Plate
11-8822-W*	2 Gang Duplex Recep. Plate
11-8831-W*	1 Gang Decora/GFCI Plate
11-8832-W*	2 Gang Decora/GFCI Plate
11-8833-W*	3 Gang Decora/GFCI Plate
11-8834-W*	4 Gang Decora/GFCI Plate
11-8851-W	1 Gang Single Hole Plate
11-SI8831N-W	Screwless 1 Gang Decora/GFCI Plate
11-SI8832N-W	Screwless 2 Gang Decora/GFCI Plate
11-SI8833N-W	Screwless 3 Gang Decora/GFCI Plate
11-SI8834N-W	Screwless 4 Gang Decora/GFCI Plate

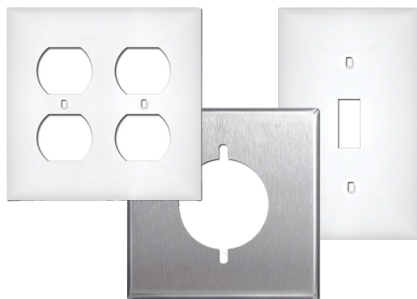

**ASK ABOUT OUR WHIPS, CORDS AND OTHER ACCESSORIES FOR YOUR PROJECT!**

\*Also available in Mid Size.

### WIRE CONNECTORS


Broad offering of popular, standard types including Barrel, Winged and Winged Easy-turn and Push-in connectors:

Barrel		Winged/Winged Easy		Push-In	
Product Number	Color	Product Number	Color	Product Number	Ports/Color
16-P2001	Baby Blue	16-P1301	Red	16-PC25201	2-port Red
16-P4001	Yellow	16-N1001	Yellow (Easy)	16-PC25301	3-port Orange
16-P3001	Orange	16-P1101	Yellow	16-PC25401	4-port Yellow
		16-N2001	Red (Easy)		
		16-P1501	Big Grey		
		16-P1701	Big Blue		
		16-P9901	Green		
		16-P1201	Tan		



### GOOF RINGS

- 06-6T-O-RING  
50 Pack
- High Quality White Plastic Goof Ring for Can Lights & Down Lights
- Outside Diameter: Approximately 7 7/8" Inches or 20 Centimeters
- Inside Diameter: Approximately 5 7/8" Inches or 15 Centimeters
- Replaces The Ring Of a 6 Inch Baffle Trim Can Light



### CABLE TIES

- Operating Temp: -4°F ~ 185°F
- 50 lb Tensile Strength

Product Number	Description	Color	Length (In.)
13-110869	UV Rated Mini Cable Ties	Black	4
13-110876	Mini Cable Ties	Natural	4
13-CT11-50C9	Standard Cable Ties	Natural	11
13-CT11-50COW	UV Rated Standard Cable Ties	Black	11
13-CT14-50C9	Standard Cable ties	Natural	14.5
13-CT14-50COW	UV Rated Standard Cable Ties	Black	14.5
13-CT24-175KOW	UV Rated Heavy Duty Cable Ties	Black	24
13-CT24-175K9	Heavy Duty Cable Ties	Natural	24
13-CT8-50C9	Standard Cable Ties	Natural	8
13-CT8-50COW	UV Rated Standard Cable Ties	Black	8
13-CTM8-50C9	Screw Mount Cable Ties	Natural	8



# CONTRACTOR LIGHTING CAN HELP MAKE YOUR PROJECTS SUCCESSFUL!

**FREE SHIPPING!**  
**over \$300**

Orders of \$300+ being shipped to a single location within the contiguous 48 states will not be charged freight. We'll choose the carrier and method.\*

## TERMS & CONDITIONS

### Return Policy

All returns need to include all the original parts, accessories and instruction manuals and must be in the original box. Items that have cut wires, dents, scratches, show signs of installation or are missing the original product manuals will not be accepted for return or exchange or credit. **Please contact your sales representative so that we may issue a RMA number and special return address before the item is shipped back.** Items are not returnable without a pre-authorized RMA number and subject to a 25% restocking fee. Any items returned without a pre-authorized RMA # will be denied credit.

There are no returns on special order and/or custom fixtures and/or devices made to customers required specifications.

Credits and refunds will be quickly processed once the defective product has been received, evaluated and deemed defective.

### Damaged Shipments

Always inspect your shipment when it arrives. If anything is damaged upon arrival please contact us immediately. Damaged goods claims need to be reported within 7 business days from date of delivery. No replacements for damaged products will be sent after 7 days.

For additional information, contact our reps at 877-664-5483.

### Remittance Terms & Credit Cards Accepted

Contractor Lighting & Supply accepts American Express, Discover, MasterCard, Visa, pre-pay orders and open accounts upon approval.

\*additional terms may apply, contact Contractor Lighting & Supply for more information



1225 Etna Pkwy  
Pataskala, OH 43062

# CONTACT US

for a free quote &  
unbeatable service!

877.664.5483

[info@contractorlighting.com](mailto:info@contractorlighting.com)



**CONTRACTOR  
LIGHTING & SUPPLY**

[WWW.CONTRACTORLIGHTING.COM](http://WWW.CONTRACTORLIGHTING.COM)