

10-PNL2X4-LKFS

2X4 BACK-LIT LED PANEL-LKFS

HOUSING

- White power-coated steel housing.

ELECTRICAL

- High ambient operating temperature up to 50°C.
- Universal 120-277V AC voltage (50-60Hz).
- 0-10VDC dimming driver.
- Input transient surge protection =1kV.
- Optional Emergency drivers are available.
- Type IC-rated.
- Power Factor > 0.9
- Total Harmonic Distortion < 20%.

OPTICAL SYSTEM

- Efficacy 142 Lumens per Watt.
- Field selectable 3000K, 3500K, 4000K, 5000K, and 6500K color temperatures.*
- Selectable output delivers from 4,120 to 5,355 nominal lumens, with 3 settings.*
- Long-life LEDs provide 180,000 hours of operation with at least 70% of initial lumen output (L70), and 54,000 hours with at least 90% of initial lumen output (L90).**
- LED color maintenance <0.0007 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Plastic lens.
- Color Rendering Index > 80.

MOUNTING

- Recessed mounting in grid ceilings is standard.
- Standard earthquake clips provide secure installation in grid ceilings.
- Optional Surface Mounting Kits (10-SMKT-24S) and Flange Mounting Kits (10-FLANGEKIT24-ET) provide for installation on plaster or other hard ceilings.
- Optional Cable Mounting Kits (10-PNL-CM) provide additional security, as well as suspended mounting.

CODE COMPLIANCE

- cULus listed for damp locations and insulated ceilings.
- Flicker-free per IEEE 1789-2015 (no observable adverse effects of flicker at 100% light output level).
- Complies with FCC Part 15, Class B.
- Inherently protected.
- IP6X rated for ingress protection.

WARRANTY

- 5-year warranty on all electronics and housing.

*Factory default kelvin temperature 4000K, and highest lumen output.
**L70 and L90 hours are IES TM-21-11 calculated hours.

PROJECT
TYPE
CATALOG #



Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
10-PNL2X4-50L-LKFS	47.76	23.74	1.38	7.67



PRODUCT PARAMETERS

Series	Maximum Lumens		Lumen Output/ Kelvin Selectable		Emergency Driver	
			Lumen selectable	Kelvin selectable	Blank	No Emergency Drive
10-PNL2X4	50L	LKFS*	5,000/4,500/3,300 lm	3000K/3500K/4000K/5000K/6500K	EM5	5W Emergency Driver
					EM10	10W Emergency Driver
					EM13	13W Emergency Driver



PROJECT
TYPE
CATALOG #

10-PNL2X4-LKFS

2X4 BACK-LIT LED PANEL-LKFS

ACCESSORIES (order separately)

Mounting Option:

- 10-SMKT-24S = Surface Mount Kit for 2X4 Back-lit Panel.
- 10-FLANGEKIT24-ET = Recessed Flange Mount Kit for 2X4 Back-lit Panel.
- 10-PNL-CM = Cable Mount Kit for Back-lit Panel.

Remote Mount EM Drivers:

- 10-BLEM-CP-5C = 5W Emergency Driver
- 10-BLEM-CP-10C = 10W Emergency Driver
- 10-BLEM-CP-13C = 13W Emergency Driver

COMPATIBLE EMERGENCY DRIVERS - INSTALLED

Emergency Driver Part Number	EM5		EM10		EM13	
Model	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens
10-PNL2X4-50L-LKFS	5	650	10	1300	13	1690

COMPATIBLE DIMMERS & CONTROLS

Manufacturer	Model Number	Style	Dimmer Range	Load Switching Capacity
Best Lighting	DWS-010V-T	Toggle	10%-100%	600W
Best Lighting	DWS-010V-D	Decora	10%-100%	600W
Best Lighting	GPDMLV-02-3	Toggle	10%-100%	600W
Best Lighting	GPDMLV-12-3	Decora	10%-100%	600W
Leviton	IP710-LFZ	Toggle	10%-100%	1200W
Lutron	DVSTV	Decora	10%-100%	450W

10-PNL2X4-LKFS

2X4 BACK-LIT LED PANEL-LKFS

PROJECT
TYPE
CATALOG #

ELECTRICAL DATA


Series	Measure-ments	5L					4L					3L				
		3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K	3000K	3500K	4000K	5000K	6500K
10-PNL2X4-50L-LKFS	Lumens	5,297	5,432	5,497	5,496	5,355	4,706	4,822	4,876	4,878	4,773	4,120	4,212	4,254	4,261	4,187
	Watts	39.9	39.3	38.7	39.5	40.5	34.4	34.0	33.6	34.2	35.0	29.3	29.0	28.7	29.1	29.7
	Efficacy	132.9	138.4	141.9	139.0	132.2	136.6	142.0	145.3	142.8	136.6	140.4	145.4	148.4	146.3	140.8
	Input Current (A)	120V	0.33	0.33	0.32	0.33	0.34	0.29	0.28	0.28	0.28	0.29	0.24	0.24	0.24	0.25
		240V	0.17	0.16	0.16	0.16	0.17	0.14	0.14	0.14	0.14	0.15	0.12	0.12	0.12	0.12
		277V	0.14	0.14	0.14	0.14	0.15	0.12	0.12	0.12	0.12	0.13	0.11	0.10	0.10	0.11

PHOTOMETRIC DATA

10-PNL2X4-50L-LKFS

Luminaire Data	
Description	Back Lit Panel 2X4 Lumen and Kelvin Select
Total Lumens	5,497
Input Wattage	39
Efficacy (lm/W)	142
Spacing Criterion (0-180°)	1.32
Spacing Criterion (90-270°)	1.28
*Photometrics generated @4000k and highest lumen output.	

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	649	11.8%
0-30°	1,391	25.3%
0-40°	2,305	41.9%
20-50°	2,631	47.9%
40-70°	2,608	47.5%
0-60°	4,191	76.2%
0-80°	5,356	97.4%
0-90°	5,491	99.9%
90-180°	6	0.1%
0-180°	5,497	100.0%

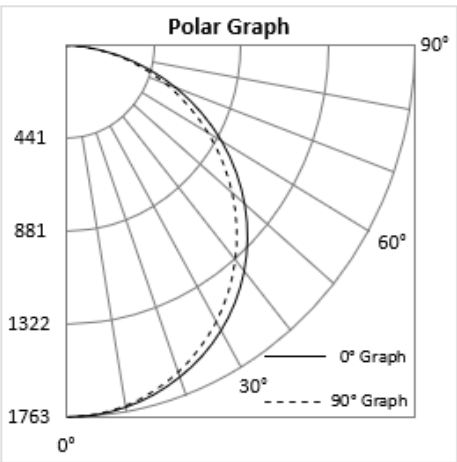



PROJECT
TYPE
CATALOG #

10-PNL2X4-LKFS


2X4 BACK-LIT LED PANEL-LKFS

BRANCH WIRING OPTIONS

When ordering a plug, use the following suffix choices.
Example: 10-PNL2X4-50L-LKFS-6W3
Note: Cords & Plugs do not affect the ability to install sensors.

Part number suffix	Description	For use with
6W3	6' whip - 3 conductor (black/white/green)	Standard
6W4	6' whip - 4 conductor (black/white/green/red)	EM driver
6W5	6' whip - 5 conductor (black/white/green/purple/pink)	Dimming
6W6	6' whip - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver

DIMENSIONAL DRAWINGS

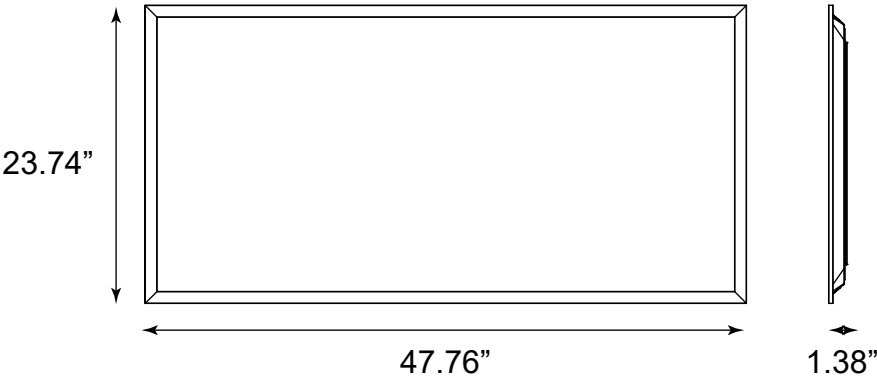


10-PNL2X4-LKFS

2X4 BACK-LIT LED PANEL-LKFS


PROJECT
TYPE
CATALOG #

MOUNTING MEANS-ORDER SEPARATELY

- Optional Surface Mounting Kit (10-SMKT-24S) mounts below the ceiling.
- Optional flange mounting kits provide for recessed installation on plaster or other hard ceilings. Attach the Flange Mount Kit (10-FLANGEKIT24-ET) to ceiling joists or other stationary structures, and the panel is mounted flush to the ceiling.
- Optional cable mounting kits provide additional security, as well as suspended mounting. Attach one end of the Cable Mount Kit (10-PNL-CM) to luminaire earthquake clips using spring clips, and attach the other end to stationary structures using the adjustable, locking ceiling attachment (see picture at the lower right).

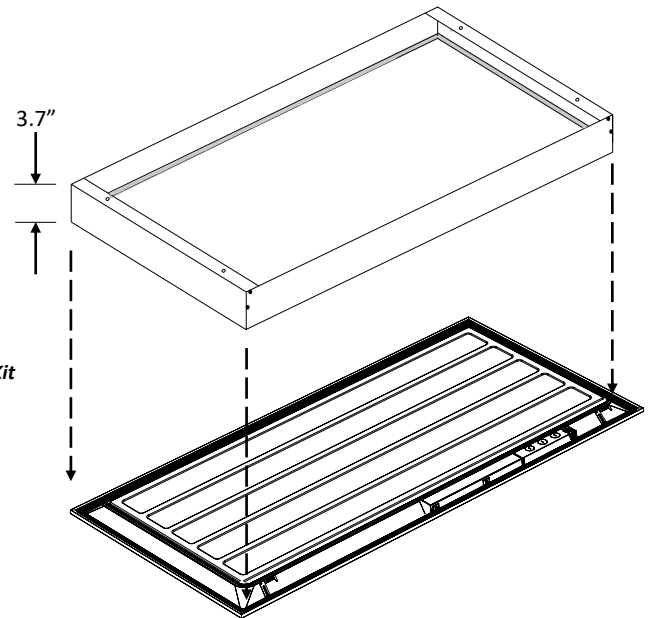

**Surface Mounting Kit
(10-SMKT-24S)**

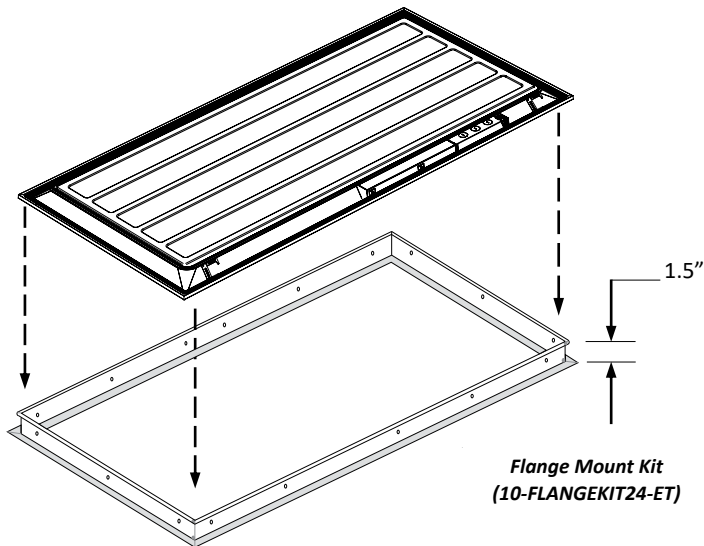

**Flange Mount Kit
(10-FLANGEKIT24-ET)**

*Spring Clip:
Attaches to earthquake clip*

**Cable Mount Kit
(10-PNL-CM)**

