

20-VTCR

VAPOR TIGHT - CHEMICAL RESISTANT LUMEN & KELVIN SELECTABLE

PROJECT
TYPE
CATALOG #

HOUSING

- White Fiberglass housing with stainless steel latches.

ELECTRICAL

- Operating temperature (ambient): -40°C to 40°C (-40°F to 104°F).
- Universal 120-277V AC voltage (50-60Hz).
- 0-10VDC dimming.
- Input transient surge protection = 4kV.
- Power Factor > 0.90.
- Total Harmonic Distortion < 20%.

OPTICAL SYSTEM

- Efficacy up to 165 Lumens Per Watt.
- Field selectable 3500K, 4000K, and 5000K color temperatures.*
- Selectable output delivers from 9,723 to 13,855 nominal lumens, with 3 settings.*
- Long-life LEDs provide 173,000 hours of operation with at least 70% of initial lumen output (L70), and 52,000 hours with at least 90% of initial lumen output (L90).**
- LED color maintenance < -0.0009 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Acrylic lens.
- Color Rendering Index > 80.

MOUNTING

- Surface mount brackets included.
- Optional cable mount kit provides luminaire suspension.


CODE COMPLIANCE

- cETLus listed for wet locations.
- Complies with FCC Part 15, Class A.
- IP69K rated for ingress protection.
- IK07 rated for impact protection.

WARRANTY

- 5-year warranty on all electronics and housing.

* Default kelvin temperature 4000k and highest lumen output.
** L70 & L90 hours are IES TM-21-11 calculated hours.

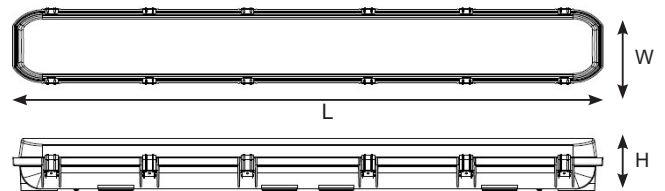

Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
20-VTCR-14119L-3CCT	51.18	6.54	4.5	10.61
20-VTCR-14119L-3CCT-ODS	51.18	6.54	4.5	11.13



PRODUCT PARAMETERS

SERIES	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)	INSTALLED SENSOR
20-VTCR	14119L = 14,000 / 11,000 / 9,000 lm	3CCT 3500K / 4000K / 5000K	ODS Microwave Sensor Blank No Sensor



20-VTCR

VAPOR TIGHT - CHEMICAL RESISTANT LUMEN & KELVIN SELECTABLE

ACCESSORIES (order separately)

Lens

ZZ-LENS-VTCR-4FT = Replacement Lens for 20-VTCR-14119L-3CCT

Mounting Option

20-CMK-3 = 3 Meter cable mount kit

20-CMK-5 = 5 Meter cable mount kit

PROJECT
TYPE
CATALOG #

COMPATIBLE DIMMERS & CONTROLS

Manufacturer	Model Number	Style	Dimmer Range	Load Switching Capacity
Best Lighting	DWS-010V-T	Toggle	10%-100%	600W
Best Lighting	DWS-010V-D	Decora	10%-100%	600W
Best Lighting	GPDM LV-02-3	Toggle	10%-100%	600W
Best Lighting	GPDM LV-12-3	Decora	10%-100%	600W
Leviton	IP710-LFZ	Toggle	10%-100%	1200W
Lutron	DVSTV	Decora	10%-100%	450W

LUMEN TABLE & ELECTRICAL DATA

Series	Measure-ments	14L Setting			11L Setting			9L Setting		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
20-VTCR-14119L-3CCT	Lumens	13,251	13,855	13,507	11,616	12,144	11,908	9,723	10,128	9,998
	Watts	88.0	84.5	88.4	77.1	74.4	77.5	63.1	61.2	63.5
	Efficacy	151	164	153	151	163	154	154	166	158
	Input Current (A)	120V	0.73	0.70	0.74	0.64	0.62	0.65	0.53	0.51
		240V	0.37	0.35	0.37	0.32	0.31	0.32	0.26	0.25
		277V	0.32	0.31	0.32	0.28	0.27	0.28	0.23	0.22

20-VTCR

VAPOR TIGHT - CHEMICAL RESISTANT LUMEN & KELVIN SELECTABLE

PROJECT
TYPE
CATALOG #

PHOTOMETRIC DATA

20-VTCR-14119L-3CCT


Luminaire Data

Description	4' Vapor Tight Lumen and Kelvin Select
Total Lumens	13,855
Input Wattage	85
Efficacy (lm/W)	164
Spacing Criterion (0-180°)	1.24
Spacing Criterion (90-270°)	1.34

Photometrics generated @4000K
and highest power output

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	1,629	11.8%
0-30°	3,468	25.0%
0-40°	5,705	41.2%
20-50°	6,407	46.2%
40-70°	6,148	44.4%
0-60°	10,169	73.4%
0-80°	12,924	93.3%
0-90°	13,390	96.6%
90-180°	465	3.4%
0-180°	13,855	100.0%

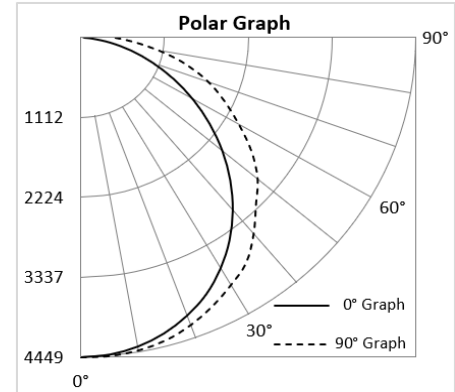

DIMENSIONAL DRAWINGS

20-VTCR-14119L-3CCT

